


Roof Light Fitting Instructions

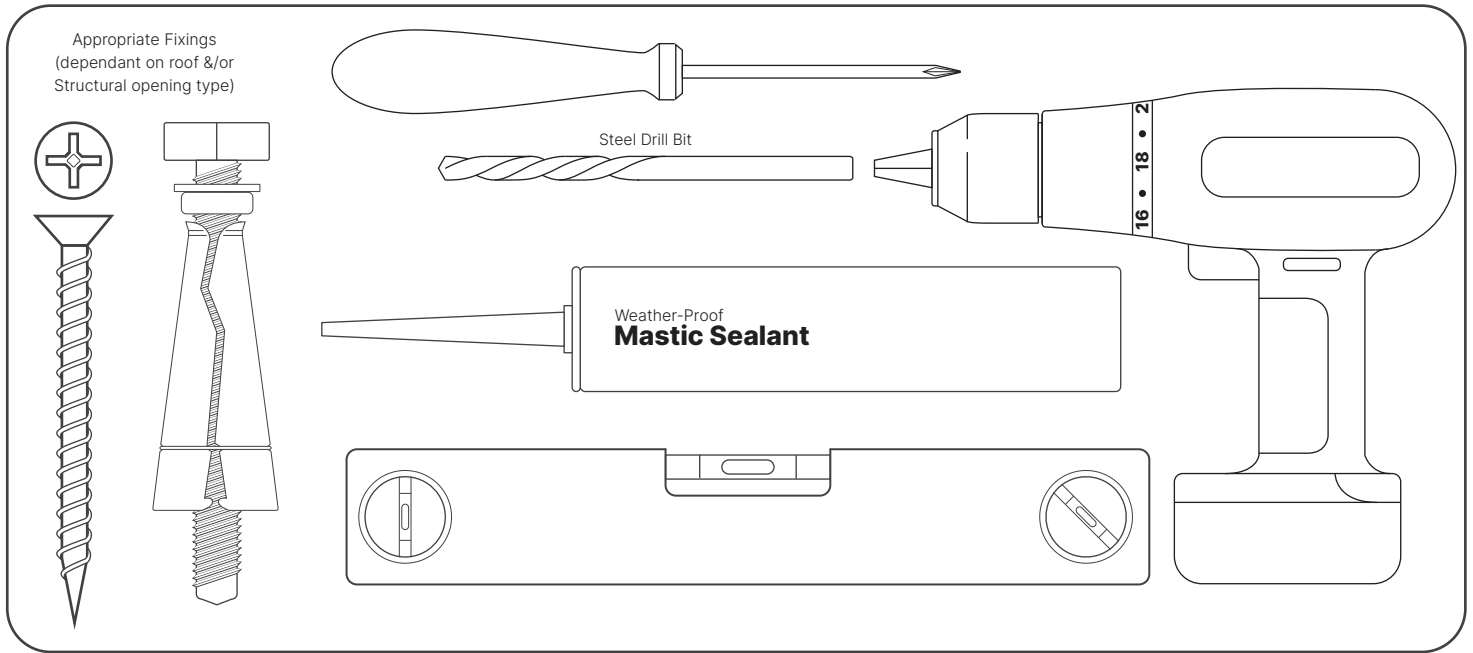


1

Ensure the hatch is stable & level when opening.


To open the lid, turn the window style latch, noting that it is operated by a gas strut and will open promptly and automatically.

Ensure that the clear opening match.

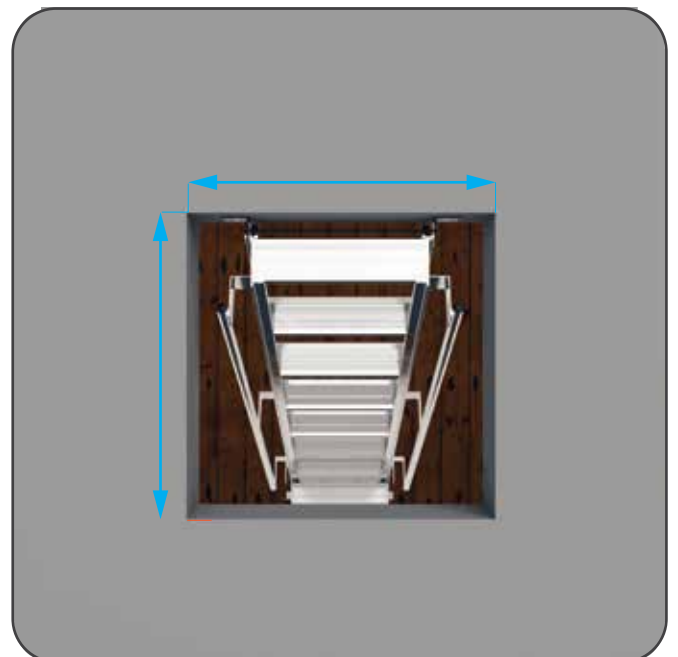


2

Drill several appropriately sized holes through the bottom fixing plate that correspond to your fasteners and the roof or supporting structure.

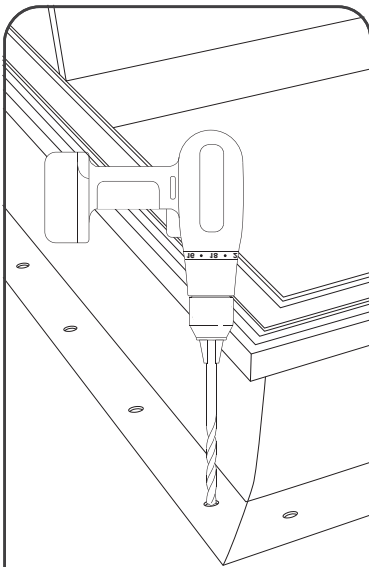
**3**

Secure the roof hatch to the roof or supporting structure using suitable fixings.

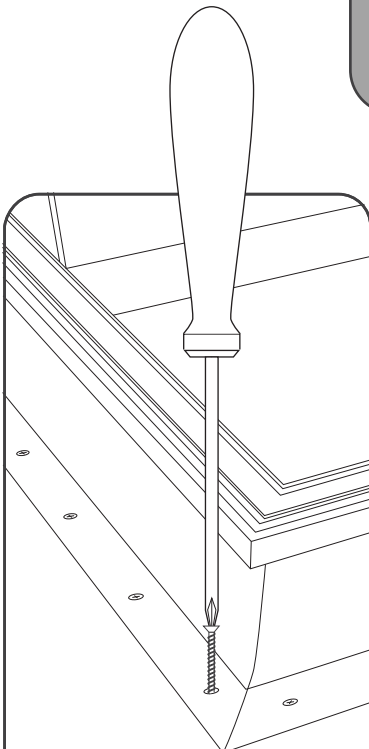


4

Apply weatherproof sealant to secure the fixing edge of the roof hatch to the roof.

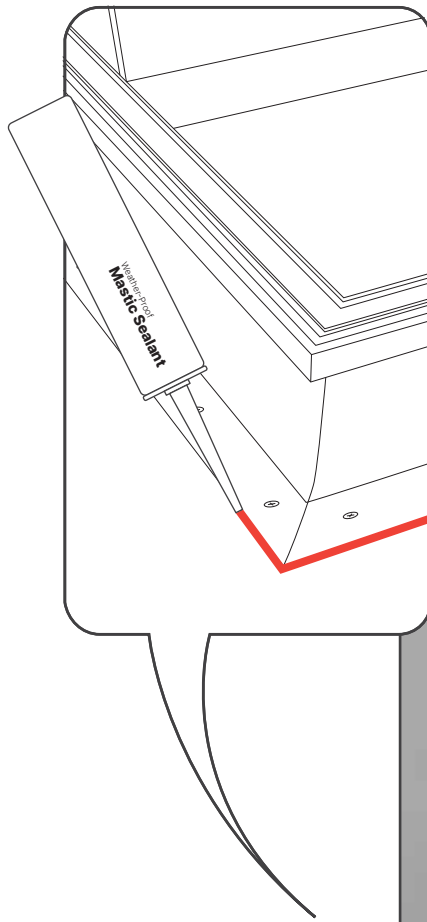
**5**

Apply the roofing membrane according to the manufacturer's instructions, ensuring the membrane extends under the rain fall-off strip around the center belly of the hatch.

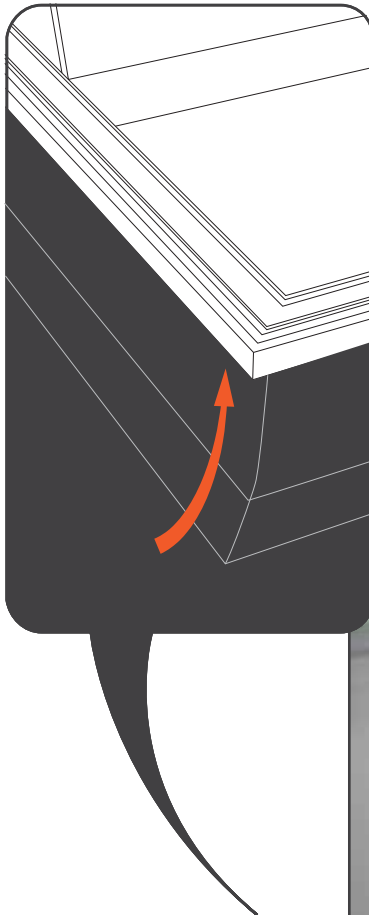

6

Apply silicone to seal the membrane to the hatch beneath the rainfall-off strip.

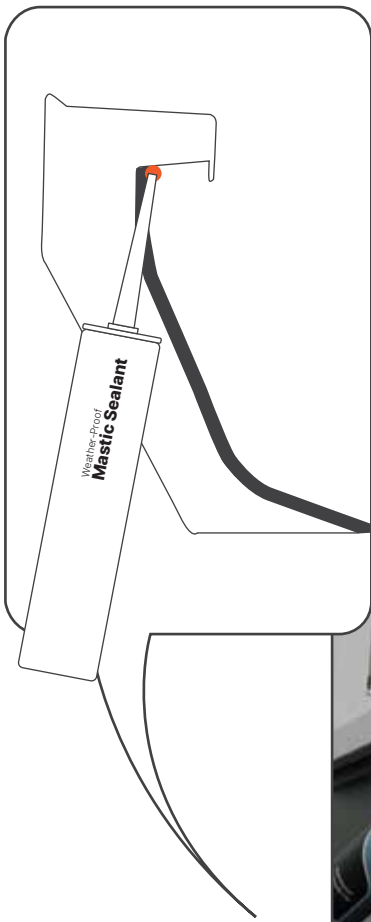

To close the lid, pull the window lever down and lower the lid, turning the lever until it latches.

7