
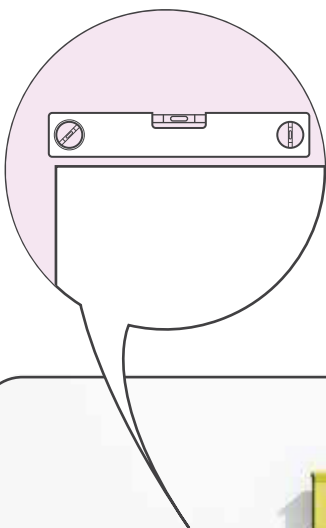





TILE HINGED Fitting Instructions

40mm Steel
Drywall
Screws




Ensure your structural opening is formed level, plumb, and square and 23mm larger than the internal frame size.

1




2

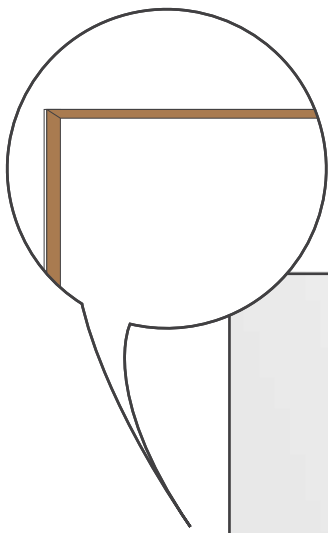

Support the opening by adding a timber baton around the opening if required.



3

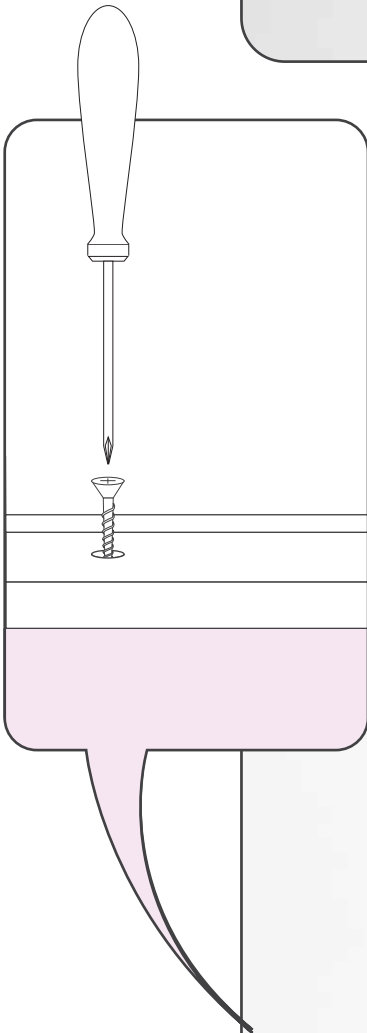



Fix the frame using 40mm steel drywall screws using all the pre-punched holes of the frame.



4

Apply tile adhesive to the door and surrounding wall following the guidelines provided by the adhesive manufacturer's instructions. **Max thickness incl. tile & adhesive: 12 mm**

Tile outwards from the access panel, **covering** the frame.

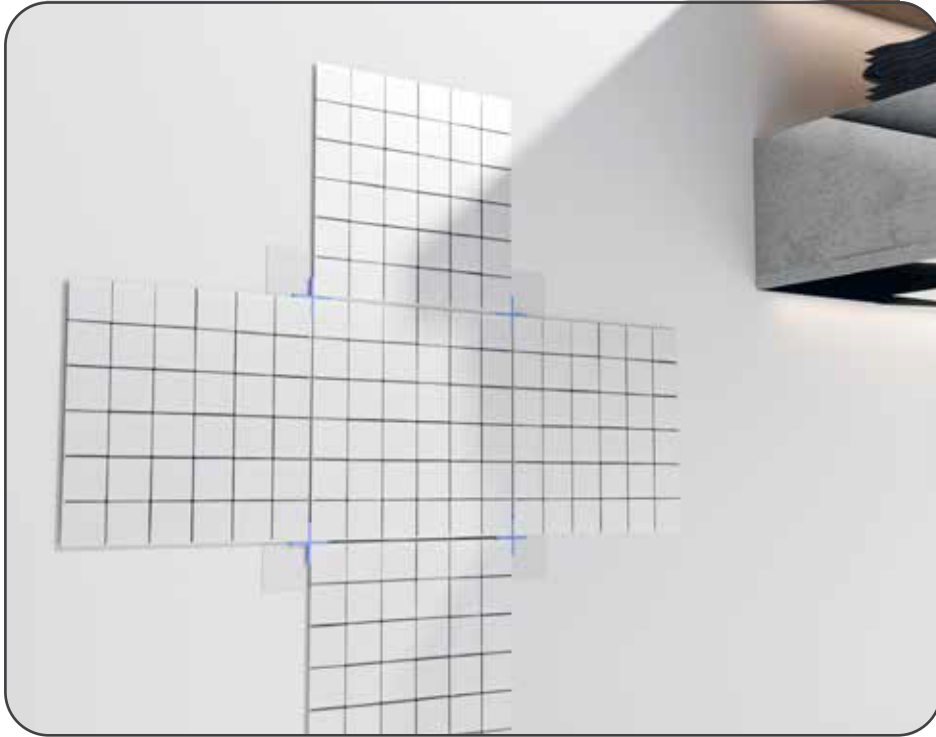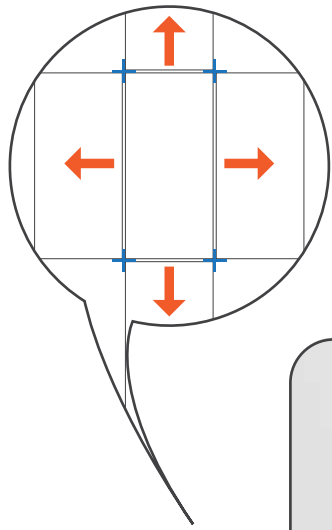**5**

To open the access panel push the tile door in to release.

