

**INNOVATION
IN ACCESS**

ACCESS PANELS
LOFT HATCHES
LOFT LADDERS
ROOF HATCHES
AOV SMOKE VENTS

THIS IS
jupiter blue



OUR ASPIRATIONS

Our Mission To produce and supply high-quality Access Panels and Loft Hatches to the building industry, supported by a dedicated team of service-oriented professionals.

Our Vision To be recognised as the UK's leading supplier of Access Panels and Loft Hatches, setting the industry standard for quality while fostering the best workplace culture.



Jupiter Blue Ltd is the UK's largest stockist of access panels with over 300,000 stock items available for next day delivery.

01

Business

- Fully meeting customers' needs on quality, service and cost
 - Simple, clear, transparent lines of communication
 - We are professional in all things at all times
 - We behave in an ethically responsible manner
 - Reducing our carbon footprint and caring for the environment
 - We strongly support our chosen charities
-

02

People

- We teach each other whenever possible
 - We are passionate about health, welfare and wellbeing of staff
 - We give time and resources to generously supporting our staff
 - We are open and transparent with each other
-

03

Innovation

- Every day creates an opportunity to be innovative
 - We invent things others thought impossible
 - We apply creative practical solutions to complex problems
-

CONTENT

The UK's largest stockist of access panels and loft hatches, offering free next-day delivery on most stock items.

01

UNDERSTANDING FIRE RATED

P.6

To ensure continuity of the fire-resistance-rated assembly, a certified fire-rated access panel must be utilized. This measure is required to uphold the structural integrity of the surrounding wall or ceiling and is indispensable for re-establishing the required fire and smoke barrier performance across the access aperture, thereby complying with building safety codes.

02

ICON DIRECTORY & DEFINITIONS

P.7

This section is dedicated to clarifying the visual language utilised throughout our documentation. Our icon set has been strategically designed to simplify complex information, ensuring a clear and intuitive understanding of product specifications and features.

03

BESPOKE ACCESS PANEL SOLUTIONS

P.8

Leveraging our UK-based design and manufacturing facilities, we offer fully customised access panel solutions. Our production process is highly flexible, enabling us to deliver bespoke panels engineered to meet diverse project specifications and specific size requirements.

04

ACCESS PANEL PORTFOLIO

P.9

Our detailed product portfolio showcases a wide spectrum of access solutions, including models specifically classified as Fire-Rated for barrier integrity, alongside our high-quality Non-Fire-Rated panels. Please review the selection to find the product that meets your project specifications.

05

LOFT HATCH SOLUTIONS

P.46

We present our specialised collection of Loft Hatches, engineered to provide secure and compliant access to roof voids and attic spaces. Our portfolio includes models with enhanced thermal performance and, where required, Fire-Rated classifications to maintain ceiling integrity.

06 LOFT LADDER SYSTEMS

P.55

This section details our full inventory of vertical access equipment for residential and commercial structures. Our Loft Ladders provide a permanent, retractable solution for accessing roof voids, offering optimal performance in terms of stability, load-bearing capacity, and ease of deployment.

07 ROOF ACCESS HATCH SYSTEMS

P.61

We offer a specialised line of Roof Hatches designed to provide secure, controlled, and weatherproof access to commercial and industrial rooftops. Our systems are engineered for superior durability and thermal performance, ensuring the integrity of the building envelope against external elements.

08 AOV SMOKE VENTS

P.64

Explore our range of high-performance AOV Smoke Vents, essential components of natural Smoke and Heat Exhaust Ventilation (SHEV) systems. Upon activation, these units rapidly open to create a chimney effect, mitigating smoke accumulation and reducing heat build-up to preserve life safety and minimize structural damage during a fire incident.

09 LOCKING OPTIONS

P.68

To ensure compatibility with project security specifications, our access panels and hatches are available with a wide array of configurable locking options. These mechanisms range from simple budget locks and standard tamper-resistant systems to those required for specific fire or security compliance ratings. Please consult the product specifications for details on compatible locking solutions.

10 BUILDING INFORMATION MODELING (BIM)

P.70

Building Information Modeling (BIM) is an advanced methodology rooted in the generation and management of structured digital representations of the physical and functional characteristics of a building or infrastructure asset. This enables efficient information exchange and coordinated data analysis among project stakeholders.

FIRE RATED ACCESS PANELS



Ensure safety and compliance without compromising on aesthetics. Our Fire Rated Products are manufactured from Zintec steel for a durable, corrosion-resistant finish. They are available with either a Beaded Frame (BF) for plastering in or a Picture Frame (PF) for retrofitting.

KEY FEATURES & CERTIFICATION:

Fire Rating: Choice of up to 2-hour rating.

Testing: Independently tested in a UKAS-approved facility.

Certification: Rated up to both sides; Part J compliant.

Standards: Tested to B.S.476: Part 22:1987 and/or BS EN 1634-1:2014+A1:2018.

APPLICATION GUIDE:

Usage: Essential for maintaining the fire rating of walls/ceilings while allowing inspection access. Common in residential integral garages and commercial fire breaks.

Selection: Ensure the panel rating matches the wall/ceiling rating.

ENSURING FULL COMPLIANCE & CERTIFICATION:

For the specific regulatory requirements and technical specifications, please refer to the official document.

Scan the QR Code below to be taken directly to: **Table B4, Approved Document B (Fire Safety)**

- Ensures full compliance with UK building regulations.
- Provides definitive measurements and requirements for fire safety elements.



ICONS & CHARTS

QUICK GLANCE

We've enhanced our product detail pages with a new series of icons and a compatibility table. These visual tools ensure you can quickly and easily identify products and understand their panel properties at a glance.

ICON SET:



MADE IN THE UK




FIRE RATED



BESPOKE AVAILABLE



LOCK OPTIONS



ACOUSTIC REDUCTION



SMOKE TESTED



AIR TESTED



U VALUE



ANTI-LIGATURE



WATERPROOF



ELECTRICITY PRODUCT



SAFETY PRODUCT



GAS PRODUCT



BSI KITE MARK



WEIGHT LIMIT



GLAZING AMOUNT

UNRIVALLED COMPLETE TRULY Quality Control Bespoke!

We believe the best product comes from controlling every detail. As a self-sufficient company, Jupiter Blue Ltd relies only on our own expert teams to deliver access panels of the highest quality.

We guarantee unrivalled precision through a comprehensive, end-to-end process that leaves nothing to chance. Our journey begins with advanced Computer-Aided Design (CAD), where every specification is meticulously modeled and refined in a virtual environment.

Bespoke Manufacturing, Backed by Investment

This commitment to internal excellence is the bedrock of our service, solidified by a £1 million strategic investment in 2023 dedicated exclusively to perfecting our Bespoke Manufacturing Process.

This significant capital ensures we utilise cutting-edge technology and maintain the highest operational standards. It empowers us to transition seamlessly from precise digital design right through to construction and final finishing, ensuring that the product delivered is an exact realisation of the initial vision.

Customisation Capability

We are fully equipped to manufacture the vast majority of custom panels and components precisely to the exact size and specifications you require. This level of in-house control not only guarantees precision but also provides exceptional flexibility and reduces lead times for truly bespoke projects.

Size limitations apply; details are available on individual product pages.



ACCESS PANELS

CONTENT

Our Access Panels are an essential component in both Commercial and Residential buildings, serving a critical function by providing safe, concealed, and easy access to vital infrastructure.

These panels are strategically installed to allow maintenance and service professionals quick entry to:

- Utility Services: Electrical wiring, junction boxes, and consumer units.
- Data and Connectivity: Cable management systems and networking hardware.
- Plumbing Infrastructure: Valves, pipework, shut-off points, and drainage access.

By concealing these elements, our panels help maintain the aesthetic integrity of the space while ensuring compliance and functionality.

Swift and Simple Delivery

We understand that timing is crucial for construction and renovation projects. Therefore, we are proud to offer Free Next Working Day Delivery on most of our standard product range.

Note: This expedited service covers our stock items. The only exception is for UK Manufactured Bespoke products, which require additional production time due to their custom nature. Lead times for these tailored solutions will be confirmed at the point of order.

Plastic

ACCESS PANELS

P.12 - HA Plastic Access Panel

P.13 - PCAP Waterproof & Airtight Plastic Access Panel

Non-Fire Rated

ACCESS PANELS

STANDARD

P.14 - PFS-SH/BFS-SH Value Steel Access Panel

P.15 - PFS/BFS Premium Steel Access Panel

P.16 - PFS/BFS-TL Touch Latch Access Panel

P.17 - EAP-INS-AT External Access Panel

P.18 - SCAP/SCABP Circular Access Panel

PLASTERBOARD FACED

P.19 - BFS-PLAST-EC Beaded Frame Plasterboard Door

P.20 - BFS-PLAST-TL Beaded Frame Touch Latch Plasterboard Door

TILE ACCESS PANEL

P.21 - TILE-LO Tiled Loft-Out Access Panel

P.22 - TILE-HIN-TL Tiled Hinged Access Panel

P.23 - TILE-K Tiled Access Panel Kit

SPECIALIST/BESPOKE

P.24 - ANTILIG-NF-PF/BF Anti-Ligature Access Panel

P.25 - PFS-SH-PERF Perforated Door Access Panel

P.26 - RIGITONE-S Acoustic Ceiling Access Solution

P.27 - PFS-LL X-Ray Guard Access Panel

P.28 - WP-TP Wallpaper Touch Latch Access Panel

Fire Rated

ACCESS PANELS

STANDARD (2Hr)

P.29 - Budget Riser Access Panel - 2Hr Fire Rated

STANDARD (1Hr)

- P.30** - PFFD/BFFD Fire Rated Access Panel
- P.31** - PFFD-INS-AT Insulated & Air Tested Access Panel
- P.32** - SDS-EAVES Fire Rated Eaves Access Panel
- P.33** - PFFD/BFFD-AT Air Tested Access Panel
- P.34** - PFFD/BFFD-INS-40dB Insulated & Acoustic Access Panel
- P.35** - ANTI-LIG-PF/BF Anti-Ligature Access Panel

PLASTERBOARD (faced)

P.36 - BFFD-PLAST - 1Hr Fire Rated Beaded Frame Plasterboard Door

RISER DOORS

- P.37** - BUDGET RISER - 2Hr Single/Double Riser Door
- P.38** - DUPLEX120-SP - 2Hr Double Riser Door (Stud & Track)
- P.39** - DUPLEX120-SP - 2Hr Single Riser Door (Stud & Track)
- P.40** - DUPLEX120-SP - 2Hr Double Riser Door (Blockwork)
- P.41** - DUPLEX120-SP - 2Hr Single Riser Door (Blockwork)
- P.42** - DUPLEX90-SP - 90Min Single Ceiling

Meter Boxes

- P.43** - FR-MET-OVER-BX 1hr Electricity Meter Overbox
 - P.44** - MET-BOX-INS EWI Insulated Electricity Meter Box
 - P.45** - GAS-MET-INS EWI Insulated Gas Meter Box
-

HA Plastic Access Panel - 8 Sizes



- All sizes are guaranteed not to sag when fitted in ceilings.
- Lightweight and easy to fit.
- Constructed from high impact UV stable white HIPS plastic.
- Push fit lock as standard - Key lock available.
- Designed to ensure it stays flush with the frame.
- Provides a 20dB acoustic reduction.
- Finely textured surface for a paint finish (if required).
- Anti-static treated



MADE IN THE UK




LOCK OPTIONS



20dB
ACOUSTIC REDUCTION

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	FRAME WIDTH	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
HA100X150	100 × 150mm	105 × 155mm	130 × 180mm	15mm	91 × 140mm	16mm	0.11kg
HA150X150	150 × 150mm	155 × 155mm	196 × 196mm	25mm	120 × 140mm	16mm	0.18kg
HA150X230	150 × 230mm	155 × 235mm	195 × 273mm	25mm	142 × 216mm	16mm	0.23kg
HA200X200	200 × 200mm	205 × 205mm	247 × 247mm	25mm	191 × 194mm	16mm	0.26kg
HA300X300	300 × 300mm	305 × 305mm	345 × 345mm	25mm	293 × 294mm	16mm	0.47kg
HA350X350	350 × 350mm	355 × 355mm	417 × 417mm	30mm	343 × 344mm	16mm	0.75kg
HA400X400	400 × 400mm	405 × 405mm	467 × 467mm	30mm	370 × 394mm	16mm	1.03kg
HA450X450	450 × 450mm	455 × 455mm	512 × 512mm	30mm	420 × 440mm	16mm	1.13kg
HA550X550	550 × 550mm	555 × 555mm	621 × 621mm	35mm	532 × 518mm	16mm	1.6kg

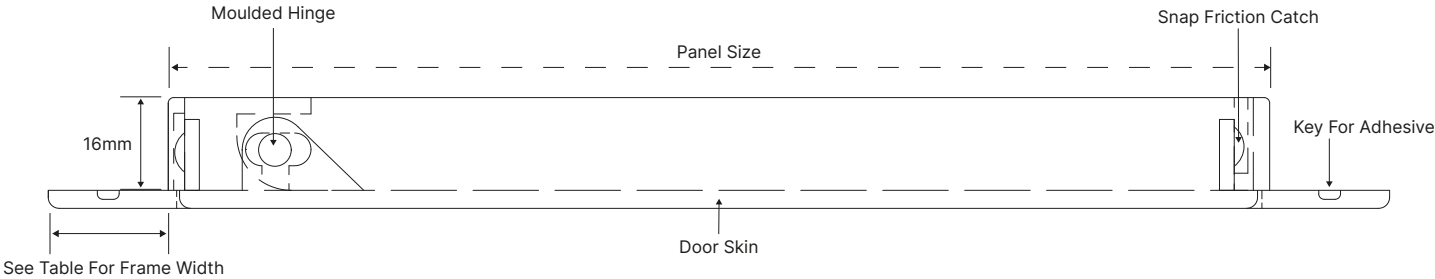

PCAP Waterproof & Airtight Plastic


PCAP Waterproof & Airtight Plastic - 4 Sizes



- Simple twist action with fine thread to easily open or close.
- Airtight under both positive and negative air pressure.
- Low level gloss, white finish provides a zero maintenance.
- Fitted with a Waterproof O-ring seal.
- Perfect for Bathrooms, Showers, Wetrooms and Kitchens.
- Precision moulded from UV stable PVC.
- Circular access panel for access to building & utility services.
- Held in place by six concealed face fixing points.



CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PCAP102	ø 102 mm	ø 115mm	ø 162mm	ø 102 mm	10mm	0.1kg
PCAP127	ø 127 mm	ø 140mm	ø 187mm	ø 127 mm	10mm	0.2kg
PCAP152	ø 152 mm	ø 166mm	ø 212mm	ø 152 mm	10mm	0.2kg
PCAP200	ø 200 mm	ø 213mm	ø 260mm	ø 200 mm	10mm	0.4kg

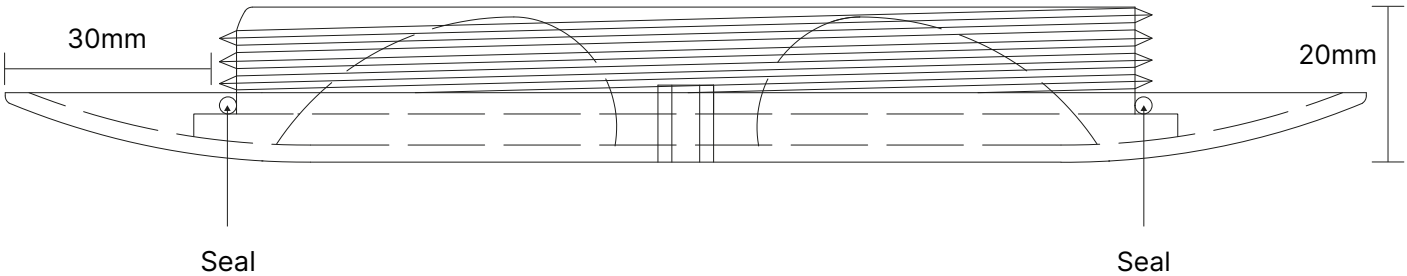

T: 01937 325 325 E: info@jupiterblue.co.uk



PFS-SH/BFS-SH Steel Access Panel

PFS-SH Picture Frame or BFS-SH Beaded Frame



BFS-SH
BEADED FRAME



- Steel access panel, just 30mm deep with a 25mm frame.
- Pre-drilled fixing holes for easy fitting.
- Suitable for use in either walls or ceilings.
- Budget, Tamper Proof or Key Locking Options.
- Fabricated from Zintec steel.
- Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK




LOCK OPTIONS



BESPOKE AVAILABLE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-SH/BFS-SH-150×150	150 × 150mm	155 × 155mm	200 × 200mm	147 × 97mm	29mm	0.7kg
PFS-SH/BFS-SH-200×200	200 × 200mm	205 × 205mm	250 × 250mm	197 × 149mm	29mm	1.0kg
PFS-SH/BFS-SH-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	227 × 98mm	29mm	1.0kg
PFS-SH/BFS-SH-300×300	300 × 300mm	305 × 305mm	350 × 350mm	298 × 250mm	29mm	1.5kg
PFS-SH/BFS-SH-350×350	350 × 350mm	355 × 355mm	400 × 400mm	344 × 298mm	29mm	2.0kg
PFS-SH/BFS-SH-400×400	400 × 400mm	405 × 405mm	450 × 450mm	399 × 344mm	29mm	2.5kg
PFS-SH/BFS-SH-450×450	450 × 450mm	455 × 455mm	500 × 500mm	444 × 398mm	29mm	2.8kg
PFS-SH/BFS-SH-500×500	500 × 500mm	505 × 505mm	550 × 550mm	495 × 442mm	29mm	3.2kg
PFS-SH/BFS-SH-550×550	550 × 550mm	555 × 555mm	600 × 600mm	547 × 497mm	29mm	3.9kg
PFS-SH/BFS-SH-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	597 × 255mm	29mm	2.8kg
PFS-SH/BFS-SH-600×600	600 × 600mm	605 × 605mm	650 × 650mm	597 × 547mm	29mm	4.5kg

*Hinged long side

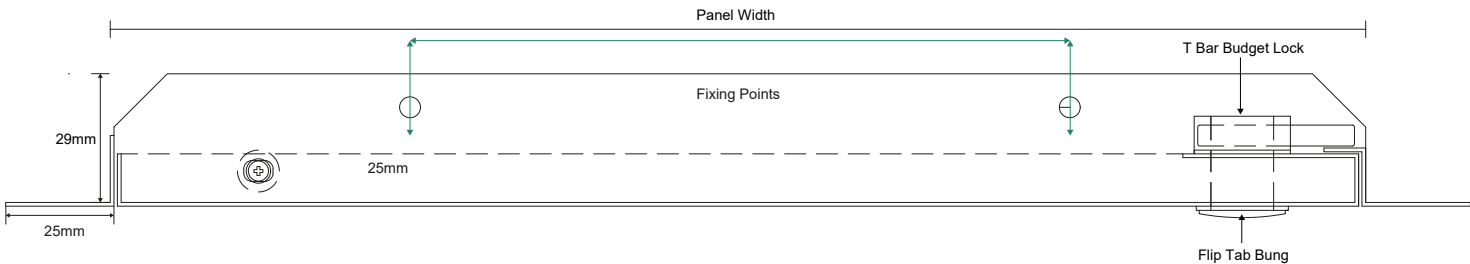

T: 01937 325 325 E: info@jupiterblue.co.uk



PFS/BFS Premium Steel Access Panel

PFS Picture Frame or BFS Beaded Frame - 9 Standard Sizes



BFS
BEADED FRAME



- Premium quality steel access panel range.
- Robust access panel, just 50mm deep with a 25mm frame.
- Suitable for use in either walls or ceilings.
- Budget or Tamper Proof Lock Options.
- Fabricated from 1.2mm Zintec steel.
- Powder coated in Satin White RAL 9010.



MADE IN THE UK




LOCK OPTIONS



BESPOKE AVAILABLE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS/BFS-150×150	150 × 150mm	155 × 155mm	200 × 200mm	122 × 110mm	50mm	1.0kg
PFS/BFS-200×200	200 × 200mm	205 × 205mm	250 × 250mm	175 × 160mm	50mm	1.3kg
PFS/BFS-300×300	300 × 300mm	305 × 305mm	350 × 350mm	270 × 260mm	50mm	2.2kg
PFS/BFS-350×350	350 × 350mm	355 × 355mm	400 × 400mm	320 × 310mm	50mm	2.5kg
PFS/BFS-450×450	450 × 450mm	455 × 455mm	500 × 500mm	420 × 410mm	50mm	3.5kg
PFS/BFS-550×550	550 × 550mm	555 × 555mm	600 × 600mm	520 × 510mm	50mm	4.7kg
PFS/BFS-600×600	600 × 600mm	605 × 605mm	650 × 650mm	570 × 560mm	50mm	5.4kg
PFS/BFS-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	820 × 560mm	50mm	7.9kg
PFS/BFS-1200×600	1200 × 600mm	1205 × 605mm	1250 × 650mm	1170 × 570mm	50mm	11.5kg

*Hinged long side

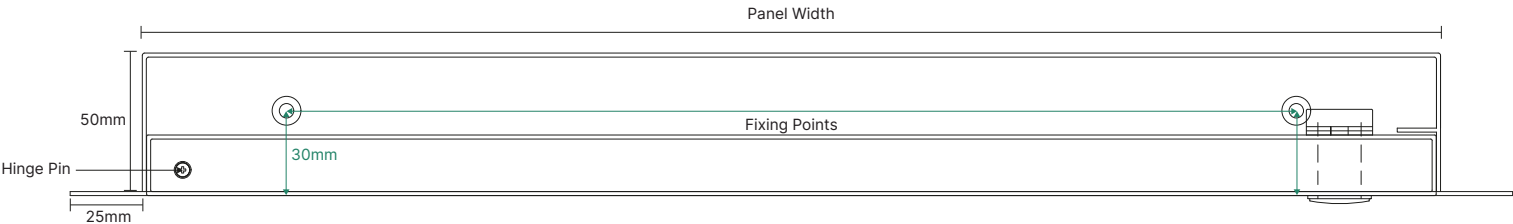

T: 01937 325 325 E: info@jupiterblue.co.uk



PFS-TL-Touch Latch locks

16

ACCESS PANELS

PFS-TL Picture Frame or BFS-TL Beaded Frame



BFS-TL
BEADED FRAME



- Slim contemporary panel with invisible locks.
- Simply press and click to open or close.
- Panel depth 27mm - Max depth 36mm (allowing for the locks).
- Beaded or Picture Frame available.
- Fabricated from 1.2mm Zintec steel.
- Powder-coated in white RAL9010 with satin finish.




MADE IN THE UK



BESPOKE AVAILABLE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-TL/BFS-TL-150	150 × 150mm	155 × 155mm	200 × 200mm	148 × 100mm	27mm*	0.5kg
PFS-TL/BFS-TL-200	200 × 200mm	205 × 205mm	250 × 250mm	198 × 150mm	27mm*	0.7kg
PFS-TL/BFS-TL-300	300 × 300mm	305 × 305mm	350 × 350mm	298 × 250mm	27mm*	1.3kg
PFS-TL/BFS-TL-350	350 × 350mm	355 × 355mm	400 × 400mm	348 × 300mm	27mm*	1.7kg
PFS-TL/BFS-TL-450	450 × 450mm	455 × 455mm	500 × 500mm	448 × 400mm	27mm*	2.6kg
PFS-TL/BFS-TL-550	550 × 550mm	555 × 555mm	600 × 600mm	548 × 500mm	27mm*	3.4kg
PFS-TL/BFS-TL-600	600 × 600mm	605 × 605mm	650 × 650mm	598 × 550mm	27mm*	3.8kg

*Panel depth is 27mm but both touch latch locks are 36mm deep. Please allow for this when fitting

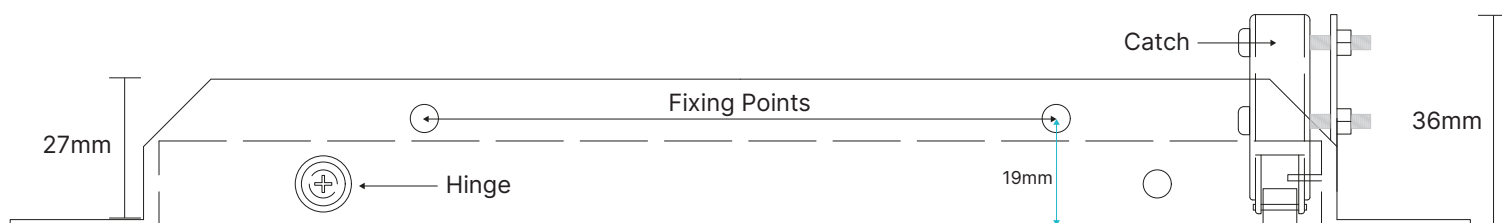

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

EAP-INS-AT External Access Panel

EAP-INS-AT Picture Frame External Access Panel



- Air Tested in a UKAS approved facility.
 - Smoke tested to BS EN 1634-3:2004.
 - Insulated with foil backed PIR insulation to 0.35 U-Value.
 - UKAS tested to provide 36dB acoustic reduction.
- Secure key radial tumbler lock.
 - Primed with electrostatic rust inhibitive powder coating.
 - Powder-coated in white RAL9010 with satin finish.
 - Bespoke sizes available.



MADE IN THE UK




SMOKE TESTED



AIR TESTED

CODE	PANEL SIZE	U VALUE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
EAP-INS-AT-300X300	300 × 300mm	0.35	305 × 305mm	350 × 350mm	280 × 255mm	33mm	2.9kg
EAP-INS-AT-450X450	450 × 450mm	0.35	455 × 455mm	500 × 500mm	430 × 375mm	63mm	4.3kg
EAP-INS-AT-600X600	600 × 600mm	0.35	605 × 605mm	650 × 650mm	580 × 525mm	63mm	5.9kg

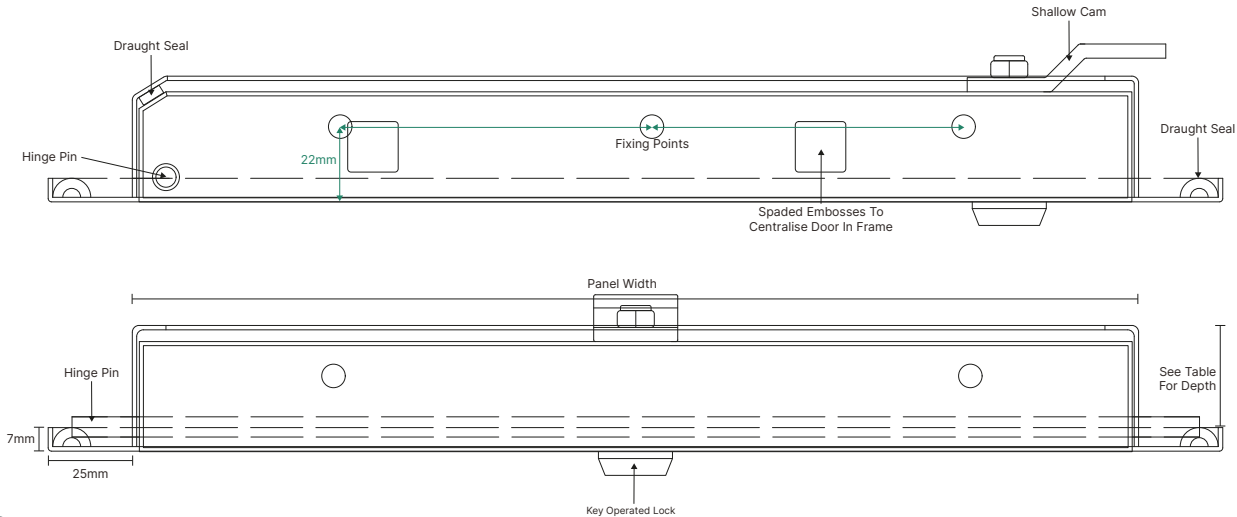

T: 01937 325 325 E: info@jupiterblue.co.uk




SCAP Picture Frame or SCAPB Beaded Frame



- Safety tether to ensure the panel won't drop on opening.
- Concealed fixings & mounts
- Picture or Beaded Frame for ceilings (only).
- Manufactured from 1.2mm Zintec steel.
- Powder-coated in white RAL9010 with satin finish.
- 5 Sizes available from Ø150mm up to Ø600mm



CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
SCAP/SCAPB-150	Ø150mm	155mm	120mm	25mm	0.2kg
SCAP/SCAPB-200	Ø200mm	205mm	170mm	25mm	0.4kg
SCAP/SCAPB-300	Ø300mm	305mm	270mm	25mm	0.7kg
SCAP/SCAPB-450	Ø450mm	455mm	415mm	30mm	2.2kg
SCAP/SCAPB-600	Ø600mm	605mm	555mm	30mm	3.4kg

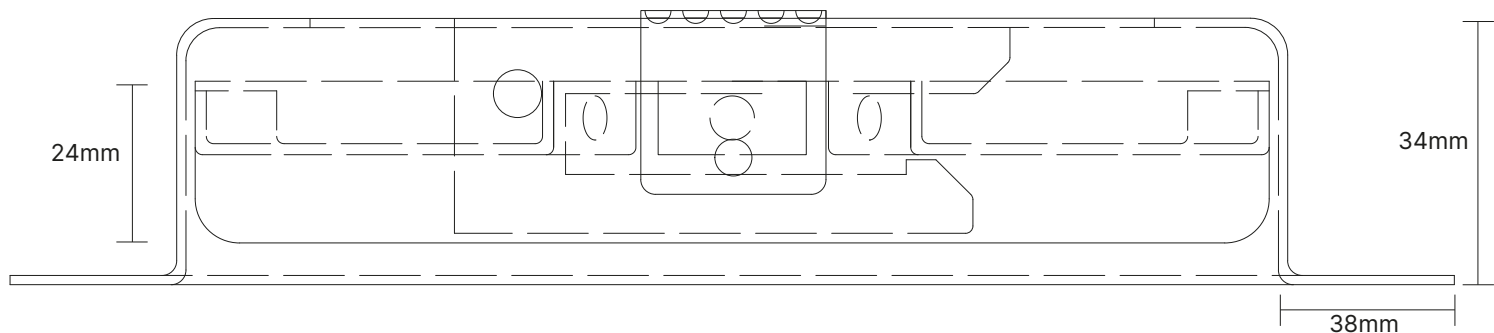

T: 01937 325 325 E: info@jupiterblue.co.uk




BFS-PLAST-EC Beaded Frame Plaster Door

19

ACCESS PANELS

BFS-Plast Beaded Frame Plaster Door - Non-fire rated



DISCREET ACCESS



Bespoke Sizes Available

Bespoke sizes up to 900 × 700mm.

- Non-Fire Rated product.
- Frame and door must be taped and jointed.
- Removable door with plastic bung to access concealed budget lock.
- 21dB reduction on acoustic test.
- Powder-coated in white RAL9010 with satin finish.
- Beaded Zintec steel frame (powder-coated).
- Plasterboard door insert.



MADE IN THE UK





ACOUSTIC REDUCTION



BESPOKE AVAILABLE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
BFS-PLAST-EC-200×200	200 × 200mm	205 × 205mm	250 × 250mm	173 × 140mm	55mm	2.2kg
BFS-PLAST-EC-300×300	300 × 300mm	305 × 305mm	350 × 350mm	275 × 240mm	55mm	3.68kg
BFS-PLAST-EC-350×350	350 × 350mm	355 × 355mm	400 × 400mm	322 × 290mm	55mm	4.48kg
BFS-PLAST-EC-400×400	400 × 400mm	405 × 405mm	450 × 450mm	373 × 340mm	55mm	5.45kg
BFS-PLAST-EC-450×450	450 × 450mm	455 × 455mm	500 × 500mm	424 × 385mm	55mm	6.54kg
BFS-PLAST-EC-500×500	500 × 500mm	505 × 505mm	550 × 550mm	472 × 440mm	55mm	7.67kg
BFS-PLAST-EC-550×550	550 × 550mm	555 × 555mm	600 × 600mm	520 × 490mm	55mm	8.81kg
BFS-PLAST-EC-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	560 × 224mm	55mm	6.06kg
BFS-PLAST-EC-600×600	600 × 600mm	605 × 605mm	650 × 650mm	559 × 514mm	55mm	10.18kg
BFS-PLAST-EC-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	842 × 540mm	55mm	14.35kg
BFS-PLAST-EC-1200×600*	1200 × 600mm	1205 × 605mm	1250 × 650mm	1142 × 522mm	55mm	17.5kg

*Hinged long side

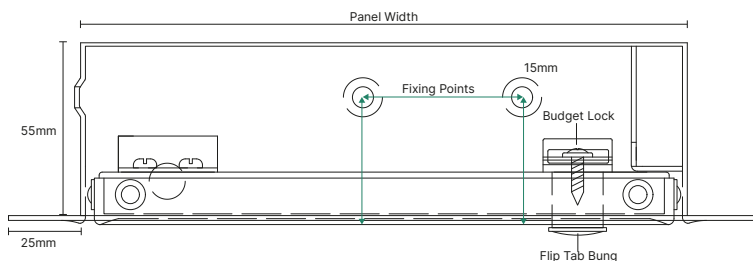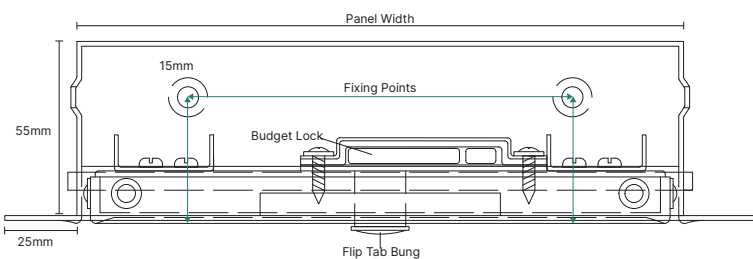

T: 01937 325 325 E: info@jupiterblue.co.uk


jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF



BFS-Plast-TL Beaded Frame Touch Latch

Beaded Frame Plaster Door - Touch Latch



DISCREET ACCESS



- Suitable for walls and ceilings.
 - Touch Latch locks making for an incredibly discreet finish.
 - Removable door for ease of installation.
- Larger panels supplied with safety cables (550mm+).
 - Fabricated from Zintec steel.
 - Powder-coated in white RAL9010 with satin finish.




MADE IN THE UK



SAFETY PRODUCT

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
BFS-PLAST-TL-200×200	200 × 200mm	205 × 205mm	250 × 250mm	183 × 164mm	27mm	1.09kg
BFS-PLAST-TL-300×300	300 × 300mm	305 × 305mm	350 × 350mm	268 × 264mm	27mm	2.01kg
BFS-PLAST-TL-350×350	350 × 350mm	355 × 355mm	400 × 400mm	333 × 315mm	27mm	2.61kg
BFS-PLAST-TL-450×450	450 × 450mm	455 × 455mm	500 × 500mm	433 × 414mm	27mm	3.91kg
BFS-PLAST-TL-550×550	550 × 550mm	555 × 555mm	600 × 600mm	534 × 515mm	27mm	5.7kg
BFS-PLAST-TL-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	564 × 268mm	27mm	3.91kg
BFS-PLAST-TL-600×600	600 × 600mm	605 × 605mm	650 × 650mm	584 × 564mm	27mm	6.51kg

*Panel depth is 27mm but touch latch locks are 50mm - please allow for this when fitting.

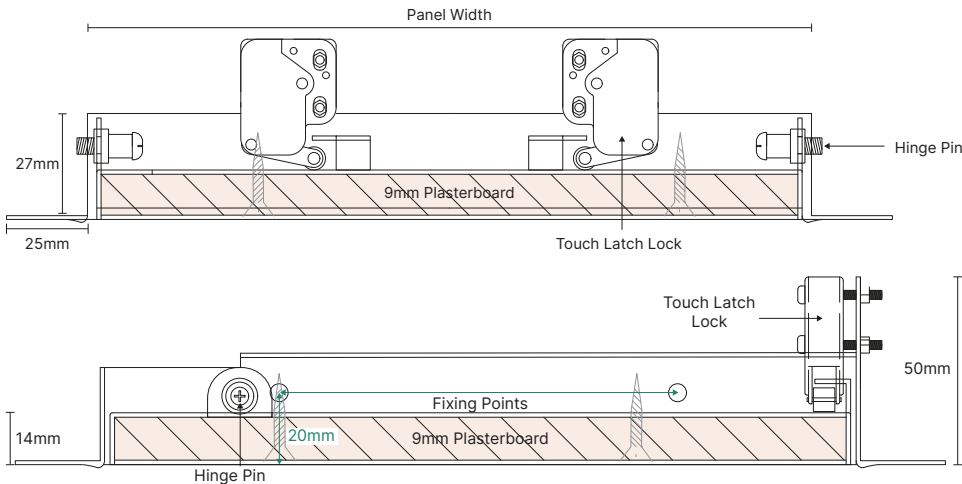

T: 01937 325 325 E: info@jupiterblue.co.uk



TILE-LO - Tile Door Access Panel

21

ACCESS PANELS

Lift out door with Touch Catch Locks - 3 Standard Sizes

Suitable with all types of tile

Up to a thickness of 12mm overall
Inc. Tile and Adhesive



- Easy to install, with a quick release, removable door.
- Front and side fixing holes - choice of face fixing or side fixing.
- Touch catch locks, press to lock & release the door.
- Non-fire rated & for use in a wall only.
- Safety tether to ensure the panel won't drop on opening.
- Bespoke sizes available up to 900 × 700mm.
- Suitable for use with all types of tile, including porcelain, ceramic, marble, stone, slate, glass, vitrified etc.



MADE IN THE UK





SAFETY PRODUCT



BESPOKE PRODUCT

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
TILE-LO 300X300	300 × 300mm	318 × 318mm	380 × 380mm	270 × 270mm	60mm	3kg
TILE-LO 450X450	450 × 450mm	468 × 468mm	530 × 530mm	420 × 420mm	60mm	5.7kg
TILE-LO 600X600	600 × 600mm	618 × 618mm	680 × 680mm	570 × 570mm	60mm	9.3kg

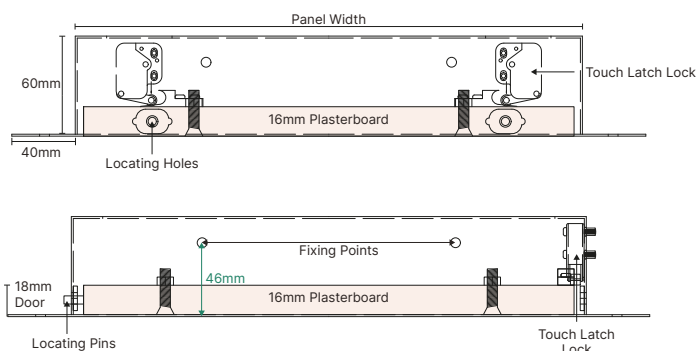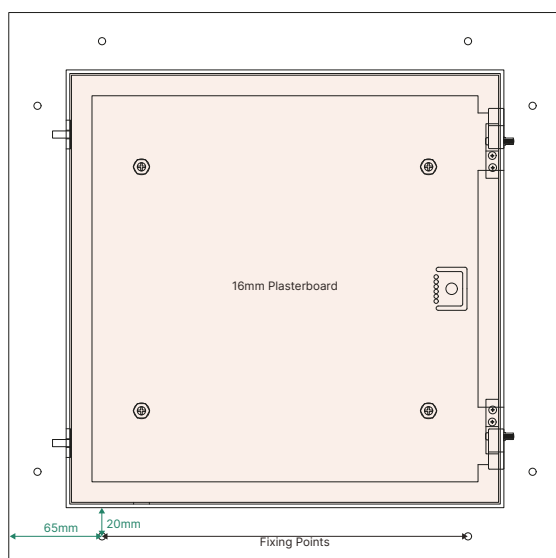

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

TILE-HIN-TL - Hinged Tile Door Panel

22
ACCESS PANELS

Tile Door Access Panel - Hinged door with Touch Catch Locks

Suitable with all types of tile

Up to a thickness of 12mm overall
Inc. Tile and Adhesive



- Easy to install, with a quick release removable door.
- Front and side fixing holes - choice of face fixing or side fixing.
- Touch catch locks, press to lock & release the door.
- Non-fire rated & for use in a Wall only.
- Bespoke sizes up to 900 × 700mm.
- Suitable for use with all types of tile, including porcelain, ceramic, marble, stone, slate, glass, vitrified etc.





MADE IN THE UK



BESPOKE PRODUCT

*With door fitted ** With door removed

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
TILE-HIN-TL 300X300	300 × 300mm	323 × 323mm	380 × 380mm	270 × 195mm 270 × 270mm	60mm	2.9kg
TILE-HIN-TL 450X450	450 × 450mm	473 × 473mm	530 × 530mm	420 × 330mm 420 × 420mm	60mm	5.7kg
TILE-HIN-TL 600X600	600 × 600mm	623 × 623mm	680 × 680mm	572 × 495mm 572 × 572mm	60mm	9.4kg

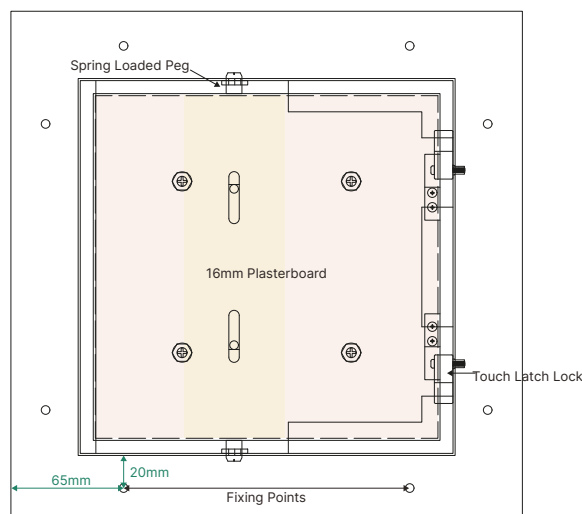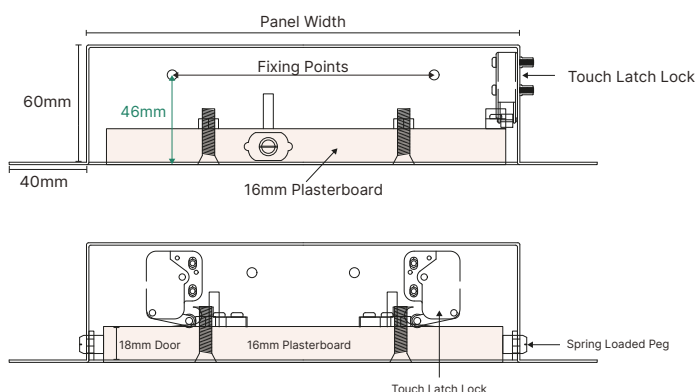

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

TILE-K - Tile Panel Kit

Converts a single tile into an access panel

Suitable with all types of Tile


Tiles up to a thickness of 10mm
(subject to max 4.5kg)



TILED
MAGNETIC DOOR



- Fully removable door for a larger access to services.
- Uses your single tile to create the hidden door.
- Twin magnetic sprung touch release latches.
- Suitable for creating from 130mm up to 600mm
- Maximum tile and adhesive weight of 4.5kg.
- The cost-effective solution to access behind tiles.
- GB1712149.2 patent number.
- Hinged at the bottom side only.

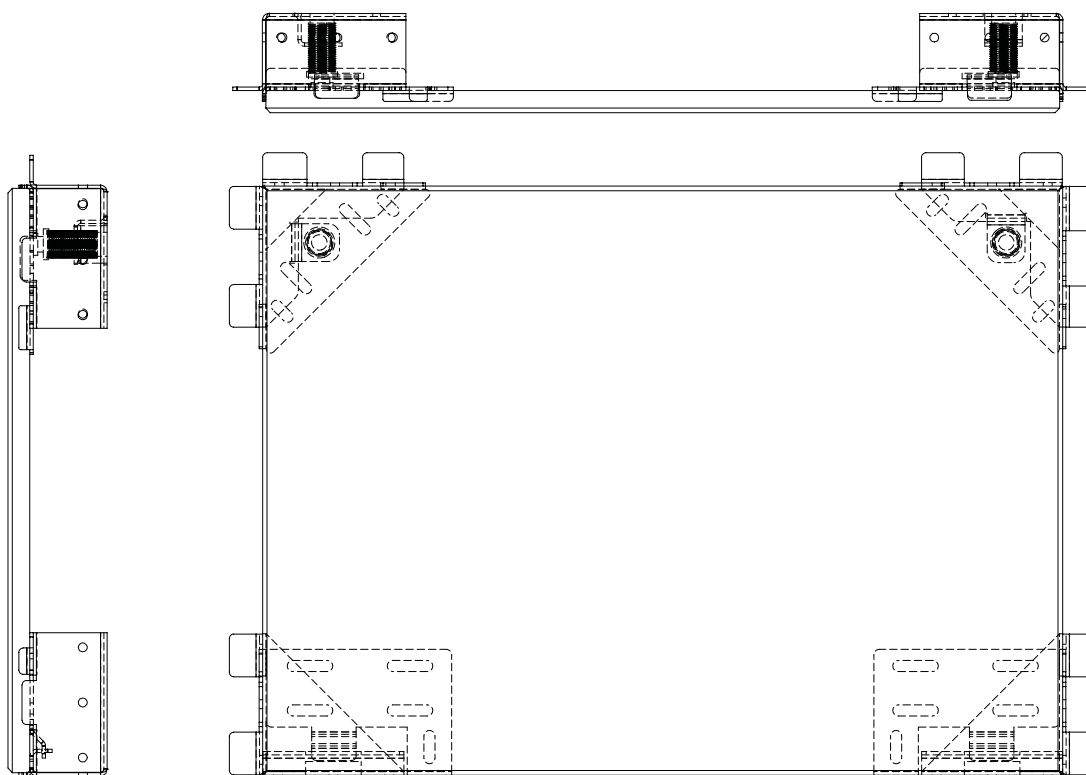

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Anti-Ligature Access Panel

ANTILIG-PF or ANTILIG-BF



ANTILIG-BF
BEADED FRAME



- Steel Access Panel designed to prevent the attachment of ligatures.
 - Sound tested to provide 36dB acoustic reduction.
 - Supplied with key lock.
- Powder-coated in white RAL9010 with satin finish.
 - Picture or Beaded frame.
 - Suitable for Walls or Ceilings.



MADE IN THE UK



ACOUSTIC REDUCTION





BESPOKE PRODUCT



ANTI-LIGATURE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
ANTILIG-PF/BF-150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	52mm	1.3kg
ANTILIG-PF/BF-200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	52mm	1.9kg
ANTILIG-PF/BF-300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 264mm	52mm	3.2kg
ANTILIG-PF/BF-350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	52mm	3.9kg
ANTILIG-PF/BF-450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	52mm	5.5kg
ANTILIG-PF/BF-550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	52mm	7.1kg
ANTILIG-PF/BF-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	564 × 235mm	52mm	5.6kg
ANTILIG-PF/BF-600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	52mm	8.4kg

*Hinged long side

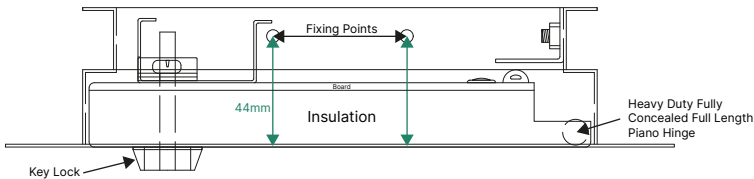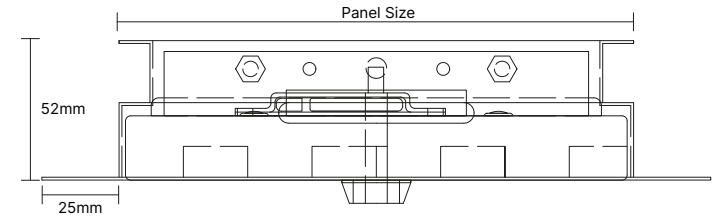

Anti-ligature Disclaimer


The anti-ligature design elements of this access panel are not intended to replace the need for necessary supervision of those who may be at risk, or for other mandatory protective measures to be utilised for the specific usage. We do not offer any products for sale as being "ligature-free" and will not be liable for claims associated with ligature attachment on its hatches/panels



T: 01937 325 325 E: info@jupiterblue.co.uk




Perforated door Access Panel - Picture Frame

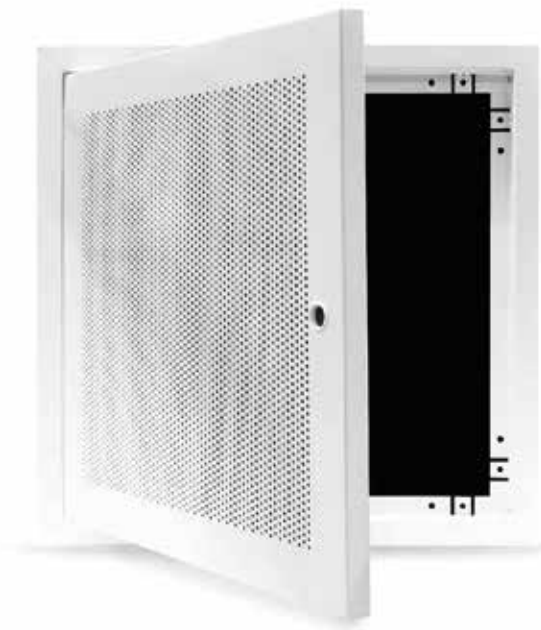

- Budget & Touch Latch Lock Available
 - Enhances airflow and/or aesthetics
 - Perforated door with Ø 3mm holes at a 6mm square pitch
(measurement between hole centres)
- Picture and Beaded Frame Available
 - Perforations are 50mm from the edge of the door.
 - Powder-coated in white RAL9010 with satin finish.
 - Slim 25mm depth frame.



CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-SH-PERF300X300	300 × 300mm	302 × 302mm	350 × 350mm	300 × 260mm	30mm	1.4kg
PFS-SH-PERF450X450	450 × 450mm	450 × 450mm	450 × 450mm	450 × 410mm	30mm	2.4kg
PFS-SH-PERF600X600	600 × 600mm	600 × 600mm	650 × 650mm	600 × 560mm	30mm	3.7kg

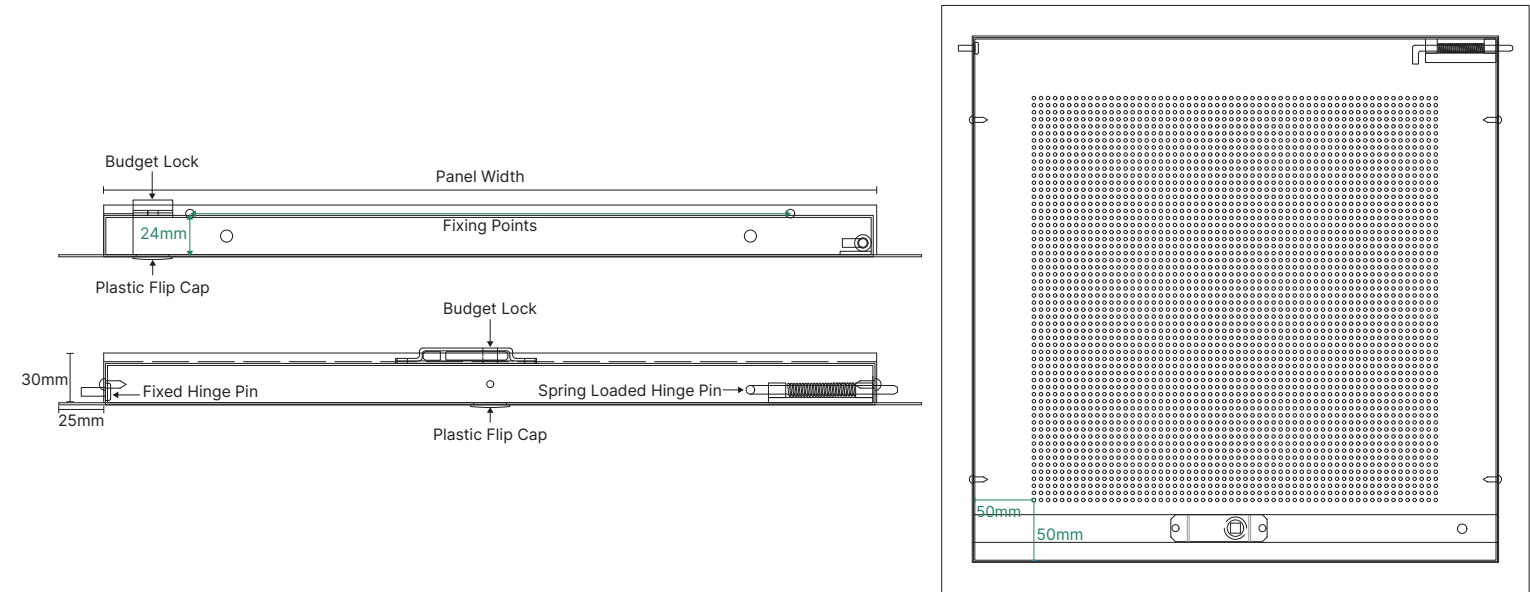

T: 01937 325 325 E: info@jupiterblue.co.uk



Acoustic Ceiling Access Solution

26
ACCESS PANELS


Multi-Compatible Acoustic Ceiling Access

COMPATIBLE WITH ALL MAJOR
CEILING SYSTEM SUPPLIERS

British Gypsum
SAINT-GOBAIN

KNAUF CEILING
Solutions

siniat

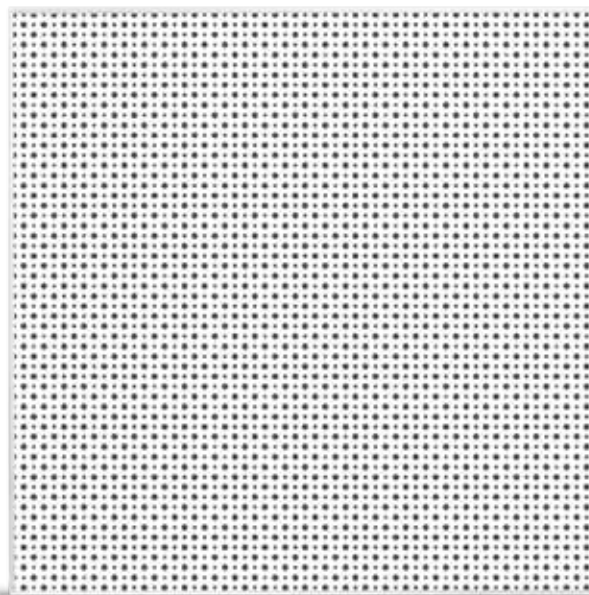

MADE IN THE UK



LOCK OPTIONS

Bespoke Sizes Up To
900 x 600mm



SEAMLESS
SURFACE


NOTE:

Independent bracing or support
may be required to take the
weight of the Access Panel.

- Touch Latch locks as standard
- Manufactured from 0.9mm Zintec Steel
- Manufactured with an exposed edge frame.
- Pivot hinged door leaf
- Budget Locking option available.
- Powder Coated RAL 9010 30% Gloss
- Non-Fire Rated Product

The Acoustic Ceiling System range of Access Panels are simple to install and suitable for ceilings allowing easy access where regular maintenance to services is required. The panel has a metal door tray to take the board inlay on site.

Make sure the structural opening is at least 7mm larger than the panel size, back of frame size. e.g. a 900 x 600mm panel size requires a 907 x 607mm hole size. Remove the door from the frame and place the frame into the set hole. Fix through the appropriate fixing holes within the frame ensuring the frame is pushed up against the structural opening surround. Check the frame is square by measuring corner to corner. Refit the door and lock in place; the door and frame should be flush.

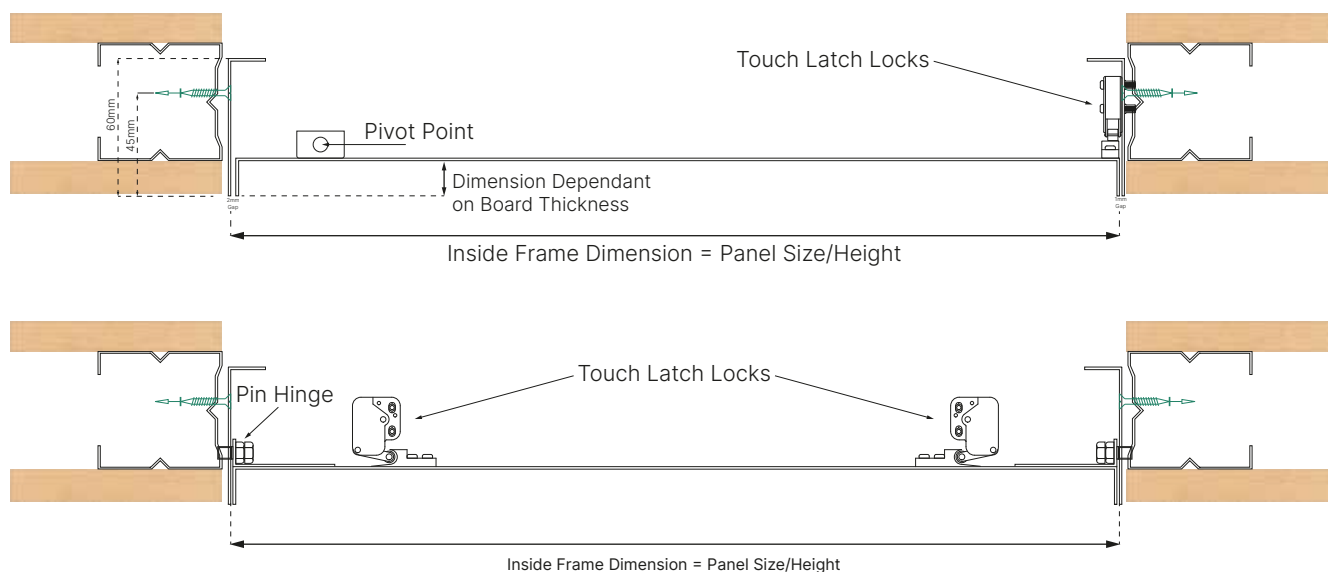

** Please advise the thickness of board required when ordering and specify if this is to take decorative board.

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF



PFS-LL X-Ray-Guard Access Panel



PFS-LL Lead Lined Protection From X-Rays



CODE 5
LEAD LINED



- Steel access panel, lined with Code 5 Lead.
 - 2.24mm thick Lead for Radiation Protection.
 - Premium quality Zintec Steel access panel range.
- T-Key Locking Function.
 - White RAL 9010 Powder Coating.
 - Picture Frame only.






MADE IN THE UK



BESPOKE PRODUCT

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-LL-300×300	300 × 300mm	310 × 310mm	350 × 350mm	260 × 270mm	52mm	10.38kg
PFS-LL-450×450	450 × 450mm	460 × 460mm	500 × 500mm	410 × 420mm	52mm	18.4kg
PFS-LL-600×600	600 × 600mm	610 × 610mm	650 × 650mm	535 × 560mm	52mm	26.42kg

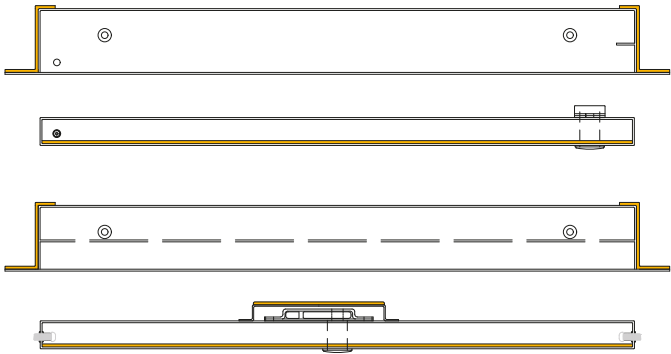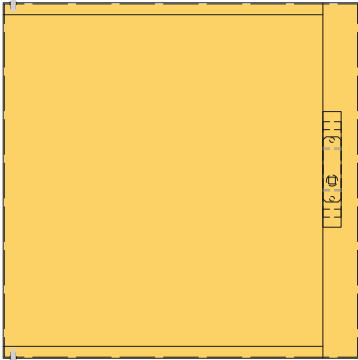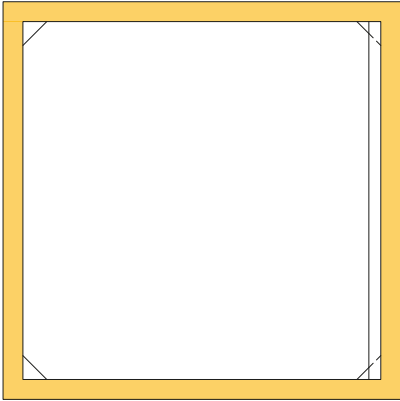

T: 01937 325 325 E: info@jupiterblue.co.uk



WP-TP Wallpaper Touch Latch

28
ACCESS PANELS

Wallpaper - Hinged door with Touch Catch Locks



- 12.5mm plasterboard face with a cut exposed edge frame
- Designed to be finished with wall paper
- Hinged door secured with twin touch catch locks
- Door is easily opened by pressing inwards
- Fabricated from Zintec steel with 50mm deep base
- Frame has pre-drilled fixing holes
- Suitable for walls and ceilings
- Removable door to aid fitting




MADE IN THE UK



BESPOKE PRODUCT

CODE	PANEL SIZE
Wallpaper Touch Latch	Bespoke Size

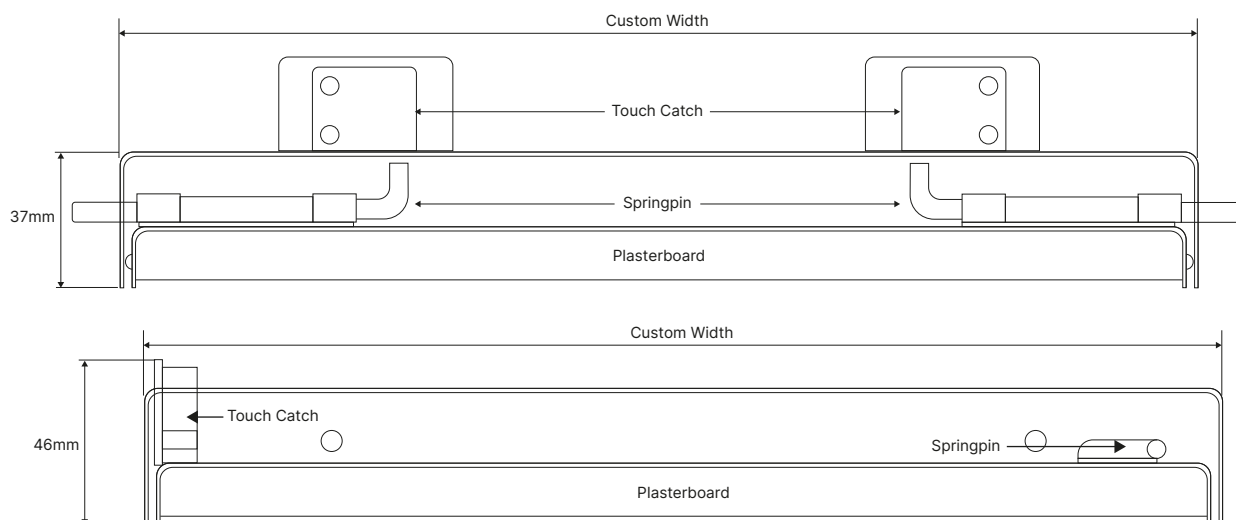

T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

BUD-FR-RIS-DR Budget Riser Access Panel

29
ACCESS PANELS

2 Hour Fire Rated Access Panel



BFFD
BEADED FRAME



120 MIN
FIRE RATED



MAXIMUM SIZE

2000 × 800 mm

NOTE: We can make this product as a Double Door with sizes up to 2000×1300mm



MADE IN THE UK



2Hr Fire Rated



SMOKE TESTED




ACOUSTIC REDUCTION
30dB



BESPOKE PRODUCT

- 2 Hour Fire Rated (120 min) bi-directional to B.S.476: Part 22
- Smoke Test Compliant (6x better than standard)
- 30dB sound reduction (BS EN ISO 10140-2)
- Max Single Door Size: 2000 × 800mm
- Beaded or Picture Frame options
- Precision manufactured in Tamworth, UK
- 53mm deep panel (depth into the opening)
- 3pt locking c/w metal T budget lock key & Part J Compliant

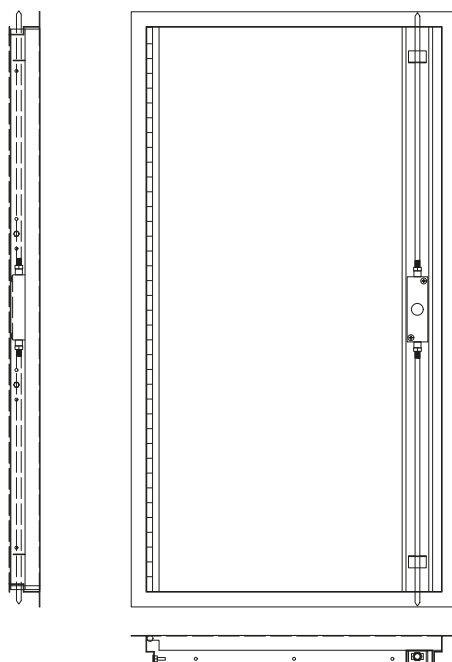

T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

PFFD Fire Rated Access Panel

30
ACCESS PANELS

PFFD Picture frame or BFFD Beaded Frame



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- Certified to a minimum 60 minute fire rating.
- 34dB sound reduction on UKAS test.
- Complies with Part B Building Regulations.
- For Walls or Ceilings
- Tested to BS EN 1634-1:2008 & BS EN 1364-2:1999 or BS476 Part22
- BS EN 1634-3 Smoke Test Approved (max 600×600mm on test specimen).
- Budget or Tamper Proof Locking Options.
- Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



34dB
ACOUSTIC REDUCTION




SMOKE TESTED



LOCK OPTIONS

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	1.7kg
PFFD/BFFD-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	2.4kg
PFFD/BFFD-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	70 X 190mm	50mm	2.1kg
PFFD/BFFD-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.3kg
PFFD/BFFD-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.4kg
PFFD/BFFD-400×400	400 × 400mm	405 × 405mm	450 × 450mm	310 × 350mm	50mm	5.8kg
PFFD/BFFD-450×450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	50mm	7.6kg
PFFD/BFFD-500×500	500 × 500mm	505 × 505mm	550 × 550mm	418 × 460mm	50mm	8.2kg
PFFD/BFFD-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	10.6kg
PFFD/BFFD-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	6.7kg
PFFD/BFFD-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	12.0kg
PFFD/BFFD-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	865 × 520mm	50mm	17.8kg
PFFD/BFFD-1200×600*	1200 × 600mm	1205 × 605mm	1250 × 650mm	1175 × 565mm	50mm	21.5kg

*Hinged long side

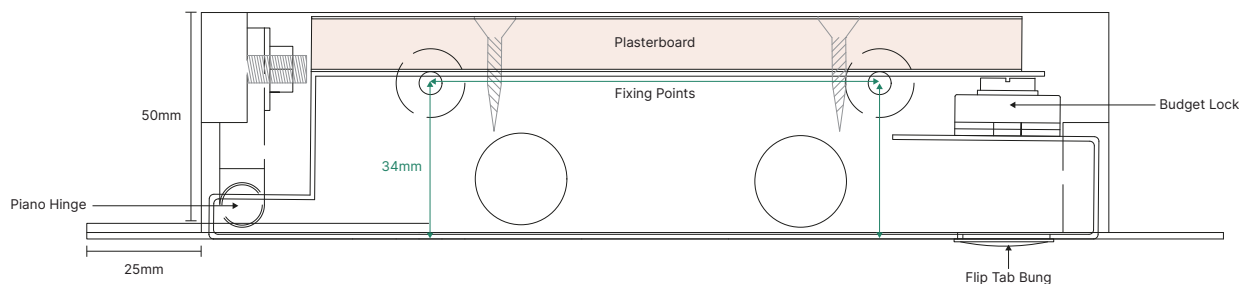

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

PFFD-INS-AT Fire Rated Access Panel

31

ACCESS PANELS

PFFD-INS-AT Insulated & Air Tested Fire Rated Panel



- Certified to a minimum 60 minute fire rating.
- 36dB sound reduction on UKAS test.
- Insulated and Air Tested to current building regs.
- Picture Frame only.
- Fire Tested to BS EN 1634-1:2008 & BS EN 1364-2:1999 or BS476 Part22.
- BS EN 1634-3 Smoke Test - 0.08 m³/hr/m
- Budget or 7 Pin Radial Tumbler Locking Options.
- Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION



AIR TESTED




LOCK OPTIONS



U VALUE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
PFFD-INS-AT-150×150	150 × 150mm	155 × 155mm	200 × 200mm	130 × 105mm	33mm	1.9kg	0.77
PFFD-INS-AT-200×200	200 × 200mm	205 × 205mm	250 × 250mm	180 × 155mm	33mm	2.2kg	0.77
PFFD-INS-AT-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	210 × 105mm	33mm	2.2kg	0.77
PFFD-INS-AT-300×300	300 × 300mm	305 × 305mm	350 × 350mm	280 × 250mm	33mm	2.9kg	0.77
PFFD-INS-AT-350×350	350 × 350mm	355 × 355mm	400 × 400mm	330 × 305mm	33mm	3.2kg	0.77
PFFD-INS-AT-450×450	450 × 450mm	455 × 455mm	500 × 500mm	430 × 375mm	63mm	4.3kg	0.35
PFFD-INS-AT-550×550	550 × 550mm	555 × 555mm	600 × 600mm	530 × 575mm	63mm	5.5kg	0.35
PFFD-INS-AT-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	580 × 250mm	63mm	4.1kg	0.35
PFFD-INS-AT-600×600	600 × 600mm	605 × 605mm	650 × 650mm	580 × 525mm	63mm	5.9kg	0.35

*Hinged long side

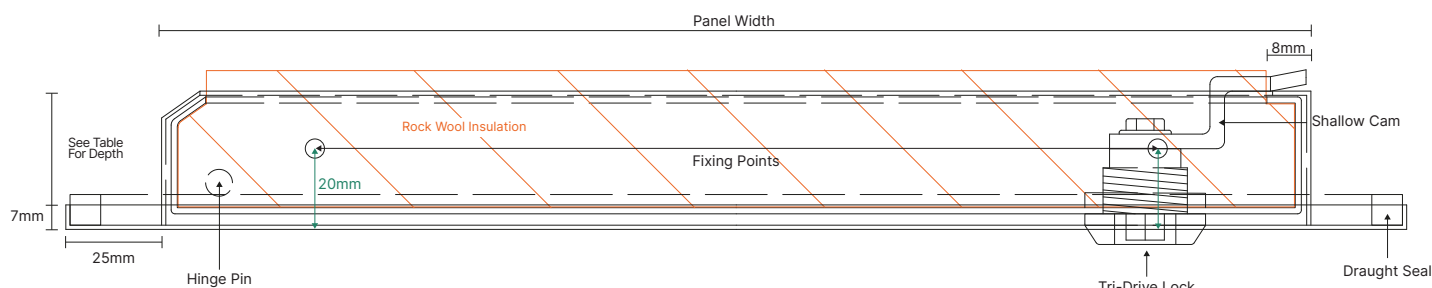

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

1 Hour Fire Rated Eaves Access



- 1 Hour Fire Rated to B.S.476: Part 22 (face side only)
- Air tested to previously unsurpassed levels
- Superb acoustic reduction of 36dB
- U-Value of 0.35 W/m²K (Part L compliant)
- Draught seals fitted between the door & frame
- Constructed from Zintec steel & powder-coated white RAL9016
- Insulated with 50mm mineral wool
- Designed to maintain insulation and draught proofing



MADE IN THE UK



1Hr Fire Rated



36dB

ACOUSTIC REDUCTION



AIR TESTED



0.35


U VALUE



BESPOKE AVAILABLE

CODE	HEIGHT	DEPTH	WIDTH
SDS-EAVES-DOOR-530X530	530mm	63mm	530mm
SDS-EAVES-DOOR-600X600	600mm	63mm	600mm
SDS-EAVES-DOOR-900X530	900mm*	63mm	530mm
SDS-EAVES-DOOR-900X600	900mm*	63mm	600mm
SDS-EAVES-DOOR-900X750	900mm*	63mm	750mm

*Hinged long side

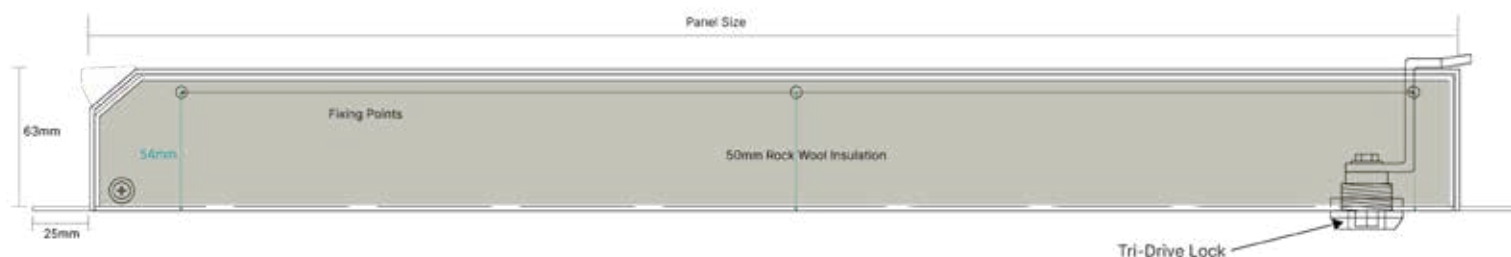

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

PFFD-AT Air Tested Access Panel

33

ACCESS PANELS

PFFD-AT Picture Frame or BFFD-AT Beaded Frame



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- Air Tested to 0.22 M3/hr/lm.
- 34dB sound reduction on UKAS test.
- Certified to a minimum 60 minute fire rating.
- BS EN 1634-3 Smoke Test (15 times better than the required standard).
- Budget or Tamper Proof Locking Options.
- Powder-coated in white RAL9010 with satin finish.
- Tested to BS EN 1634-1:2008 / BS EN 1364-2:1999 or BS476 Part22.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION



SMOKE TESTED




AIR TESTED



LOCK OPTIONS

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-AT-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	1.7kg
PFFD/BFFD-AT-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	2.4kg
PFFD-AT-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	210 × 105mm	50mm	2.1kg
PFFD/BFFD-AT-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.3kg
PFFD/BFFD-AT-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.4kg
PFFD/BFFD-AT-400×400	400 × 400mm	405 × 405mm	450 × 450mm	310 × 350mm	50mm	5.8kg
PFFD/BFFD-AT-450×450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	50mm	7.6kg
PFFD/BFFD-AT-500×500	500 × 500mm	505 × 505mm	550 × 550mm	418 × 460mm	50mm	8.2kg
PFFD/BFFD-AT-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	10.6kg
PFFD/BFFD-AT-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	6.7kg
PFFD/BFFD-AT-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	12.0kg

*Hinged long side

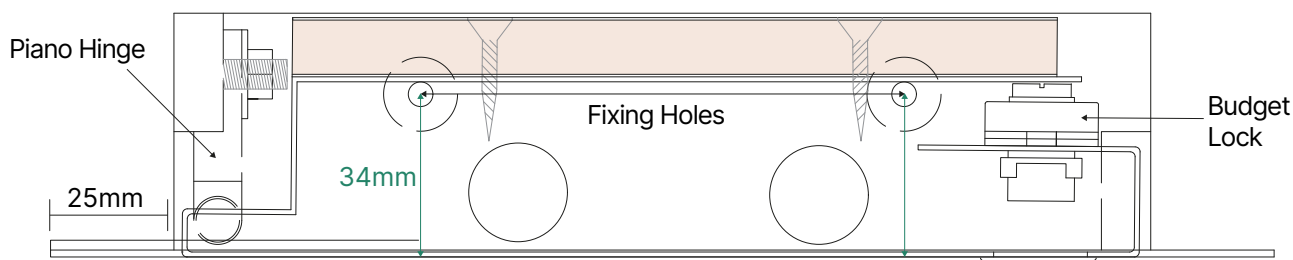

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

PFFD-INS-40dB Acoustic Access Panel

PFFD-INS-40dB Picture Frame or BFFD-INS-40dB Beaded Frame



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- 40dB sound reduction on UKAS test.
 - Certified to a minimum 60 minute fire rating.
 - BS EN 1634-3 smoke test .22 M3/hr/lm.
 - 0.45 U-value.
- Budget or Tamper Proof Locking Options.
 - Powder-coated in white RAL9010 with satin finish.
 - Tested to BS476 - Part 22: 1987.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION




SMOKE TESTED



LOCK OPTIONS

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-INS-40dB-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	2.6kg
PFFD/BFFD-INS-40dB-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	3.3kg
PFFD-INS-40dB-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	212 × 132mm	50mm	2.3kg
PFFD/BFFD-INS-40dB-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.9kg
PFFD/BFFD-INS-40dB-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.9kg
PFFD/BFFD-INS-40dB-400×400	400 × 400mm	405 × 405mm	450 × 450mm	335 × 361mm	50mm	6.3kg
PFFD/BFFD-INS-40dB-450×450	450 × 450mm	455 × 455mm	500 × 400mm	370 × 412mm	50mm	8.6kg
PFFD/BFFD-INS-40dB-500×500	500 × 500mm	505 × 505mm	550 × 550mm	433 × 462mm	50mm	7.5kg
PFFD/BFFD-INS-40dB-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	11.2kg
PFFD/BFFD-INS-40dB-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	8.1kg
PFFD/BFFD-INS-40dB-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	13.4kg
PFFD/BFFD-INS-40dB-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	865 × 520mm	50mm	17.8kg

*Hinged long side

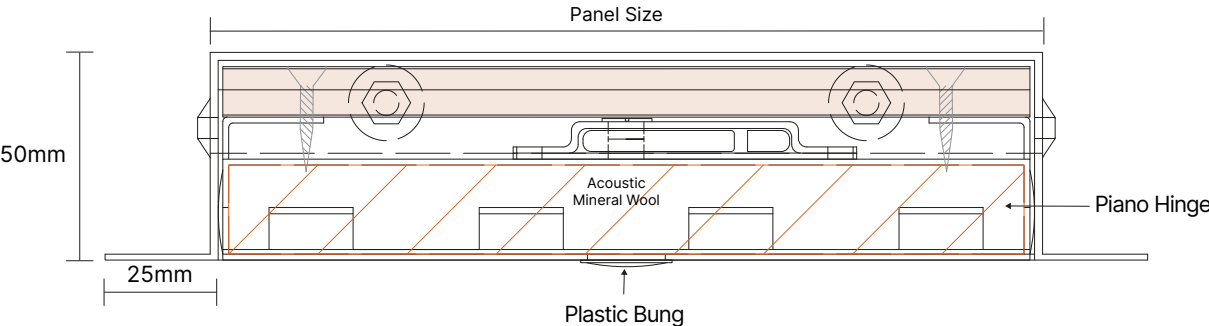

T: 01937 325 325 E: info@jupiterblue.co.uk



Anti-Ligature Access Panel

ANTILIG-PF or ANTILIG-BF



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- Certified to a minimum 60 minute fire rating.
 - Smoke Tested to BS EN 1634-3:2004.
 - Fire tested to BS 476 Part 22, in walls and ceilings.
 - Sound tested to provide 36dB acoustic reduction.
- Steel Access Panel designed to prevent the attachment of ligatures.
 - Supplied with key lock.
 - Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION
36dB





SMOKE TESTED



SAFETY PRODUCT

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
ANTILIG-PF/BF-150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	52mm	1.3kg
ANTILIG-PF/BF-200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	52mm	1.9kg
ANTILIG-PF/BF-300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 264mm	52mm	3.2kg
ANTILIG-PF/BF-350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	52mm	3.9kg
ANTILIG-PF/BF-450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	52mm	5.5kg
ANTILIG-PF/BF-550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	52mm	7.1kg
ANTILIG-PF/BF-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	564 × 235mm	52mm	5.6kg
ANTILIG-PF/BF-600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	52mm	8.4kg

*Hinged long side

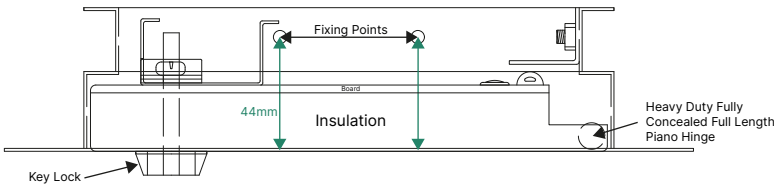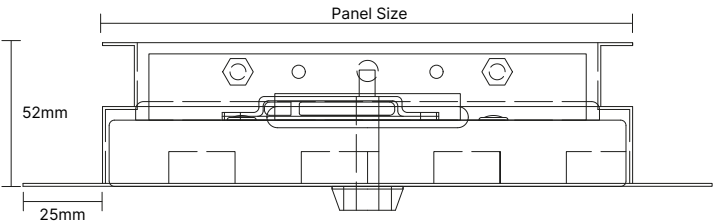

Anti-ligature Disclaimer

The anti-ligature design elements of this access panel are not intended to replace the need for necessary supervision of those who may be at risk, or for other mandatory protective measures to be utilised for the specific usage. We do not offer any products for sale as being "ligature-free" and will not be liable for claims associated with ligature attachment on its hatches/panels




T: 01937 325 325 E: info@jupiterblue.co.uk



BFFD-PLAST Beaded Frame Fire Rated

BFFD-Plast Beaded Frame Fire Rated Access Panels with Plaster Door



DISCREET ACCESS



60 MIN
FIRE RATED



- 1 Hour Fire Rated to BS 476 PART 22 wall and ceiling.
- Sliding pin hinges with removable door & budget lock.
- 21 dB reduction on acoustic test.
- Budget Lock with threaded metal bung.
- Powder-coated in white RAL9010 with satin finish.
- Frame and door must be taped and jointed.



MADE IN THE UK



1 Hr Fire Rated





ACOUSTIC REDUCTION
21dB



BESPOKE AVAILABLE

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
BFFD-PLAST-200×200	200 × 200mm	205 × 205mm	250 × 250mm	173 × 140mm	75mm	2.8kg
BFFD-PLAST-300×300	300 × 300mm	305 × 305mm	350 × 350mm	275 × 240mm	75mm	4.8kg
BFFD-PLAST-350×350	350 × 350mm	355 × 355mm	400 × 400mm	322 × 290mm	75mm	5.8kg
BFFD-PLAST-450×450	450 × 450mm	455 × 455mm	500 × 500mm	424 × 385mm	75mm	7.8kg
BFFD-PLAST-550×550	550 × 550mm	555 × 555mm	600 × 600mm	520 × 490mm	75mm	10.4kg
BFFD-PLAST-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	540 × 275mm	75mm	8.06kg
BFFD-PLAST-600×600	600 × 600mm	605 × 605mm	650 × 650mm	572 × 540mm	75mm	12.2kg
BFFD-PLAST-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	842 × 540mm	75mm	19.9kg
BFFD-PLAST-1200×600	1200 × 600mm	1205 × 605mm	1250 × 650mm	1080 × 540mm	75mm	24.2kg

*Hinged long side

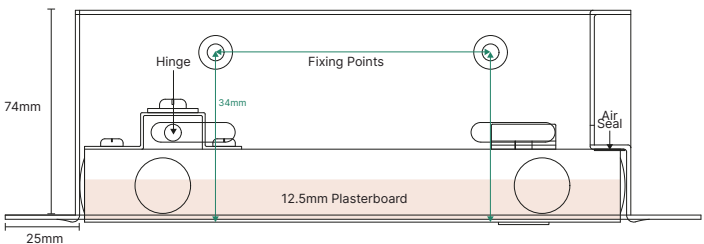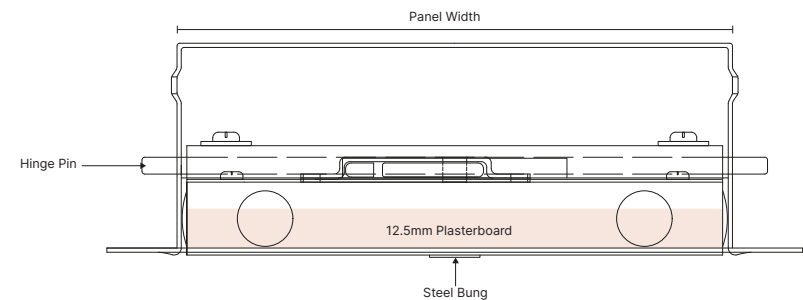

T: 01937 325 325 E: info@jupiterblue.co.uk



2 Hour Single/Double Riser Door



BFFD
BEADED FRAME



120 MIN
FIRE RATED



M A X I M U M S I Z E S

SINGLE DOOR
2000×800mm

DOUBLE DOOR
2000×1300mm



MADE IN THE UK



2Hr Fire Rated



SMOKE TESTED





ACOUSTIC REDUCTION
30dB



BESPOKE PRODUCT

- 2 Hour Fire Rated (120 min) bi-directional to B.S.476: Part 22
- Smoke Test Compliant (6x better than standard)
- 30dB sound reduction (BS EN ISO 10140-2)
- Max Single Door Size: 2000 × 800mm

- Beaded or Picture Frame options
- Precision manufactured in Tamworth, UK
- 53mm deep panel (depth into the opening)
- 3pt locking c/w metal T" budget lock key & Part J Compliant

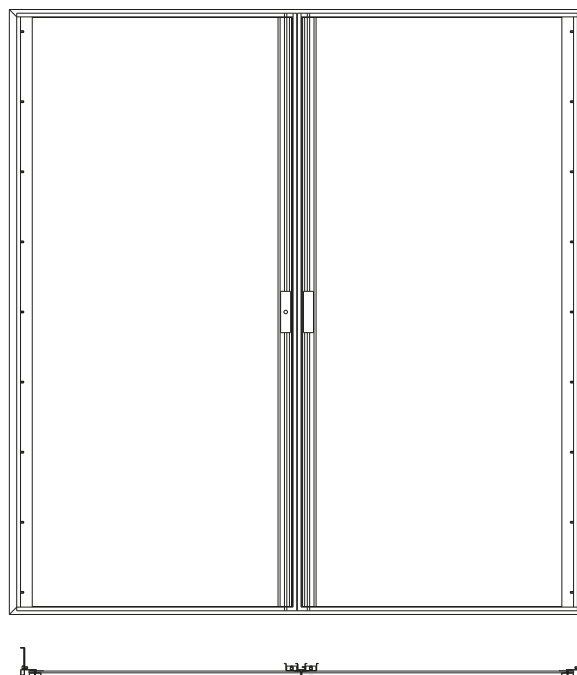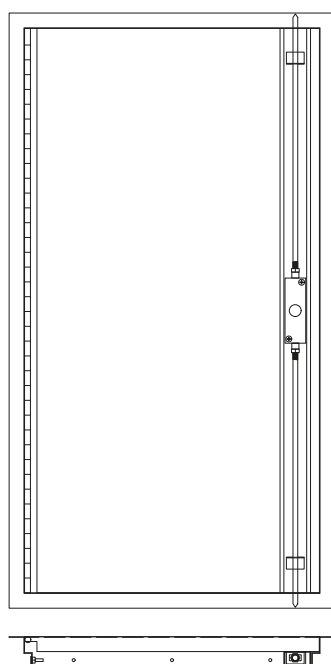

T: 01937 325 325 E: info@jupiterblue.co.uk


THIS IS
jupiter blue

Dulpex 120 *SPEED FIT* Spring Pin Hinged Door

38

ACCESS PANELS

Double Riser Doors



STUD & TRACK
ENVIRONMENT



2 HOUR FIRE RATED
BOTH DIRECTIONS



MAXIMUM SIZES

SINGLE DOOR
2300×1025mm

DOUBLE DOOR
2300×2050mm



MADE IN THE UK



2Hr Fire Rated



SMOKE TESTED




36dB
ACOUSTIC REDUCTION



BESPOKE PRODUCT

- 120-minute dual direction fire rating to BS EN 1634-1:2018
- 36dB sound reduction as per standard BS EN ISO 10140-2:2010
- Smoke tested to EN 1634-3:2004
- Insulated to 0.55 "U" Value

- Budget, Tamper-Proof, FB2 or Euro Cylinder Key Lock options available
- Speed fit spring pin hinge
- Powder coated in Satin RAL 9010
- Complies to Part B Building Regulations

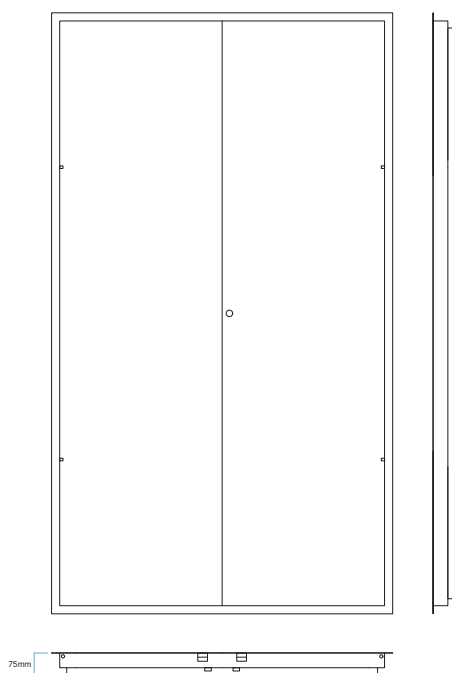

T: 01937 325 325 E: info@jupiterblue.co.uk


Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

Dulpex 120 *SPEED FIT* Spring Pin Hinged Door

39
ACCESS PANELS

Single Riser Doors



STUD & TRACK
ENVIRONMENT



2 HOUR FIRE RATED
BOTH DIRECTIONS



MAXIMUM SIZES

SINGLE DOOR	DOUBLE DOOR
2300×1025mm	2300×2050mm



MADE IN THE UK



2Hr Fire Rated



SMOKE TESTED




ACOUSTIC REDUCTION
36dB



BESPOKE PRODUCT

- 120-minute dual direction fire rating to BS EN 1634-1:2018
- 36dB sound reduction as per standard BS EN ISO 10140-2:2010
- Smoke tested to EN 1634-3:2004
- Insulated to 0.55 "U" Value

- Budget, Tamper-Proof, FB2 or Euro Cylinder Key Lock options available
- Speed fit spring pin hinge
- Powder coated in Satin RAL 9010
- Complies to Part B Building Regulations

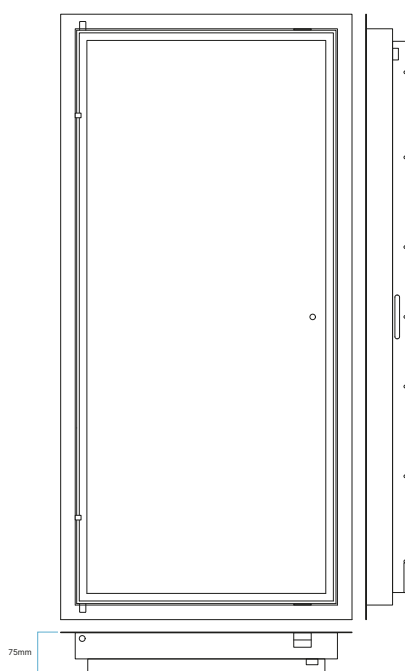

T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF


THIS IS
jupiter blue

Dulpex-BW *SPEED FIT* Spring Pin Hinged Door

40

ACCESS PANELS

Double Riser Doors



BLOCKWORK
ENVIRONMENT



120 MINUTE FIRE RATED
BOTH DIRECTIONS



MAXIMUM SIZES

SINGLE DOOR
2300×1025mm

DOUBLE DOOR
2300×2050mm



MADE IN THE UK



120Min Fire Rated



SMOKE TESTED




ACOUSTIC REDUCTION
36dB



BESPOKE PRODUCT

- 120-minute dual direction fire rating to BS EN 1634-1:2018
- 36dB sound reduction as per standard BS EN ISO 10140-2:2010
- Smoke tested to EN 1634-3:2004
- Insulated to 0.55 "U" Value

- Budget, Tamper-Proof, FB2 or Euro Cylinder Key Lock options available
- Speed fit spring pin hinge
- Powder coated in Satin RAL 9010
- Complies to Part B Building Regulations

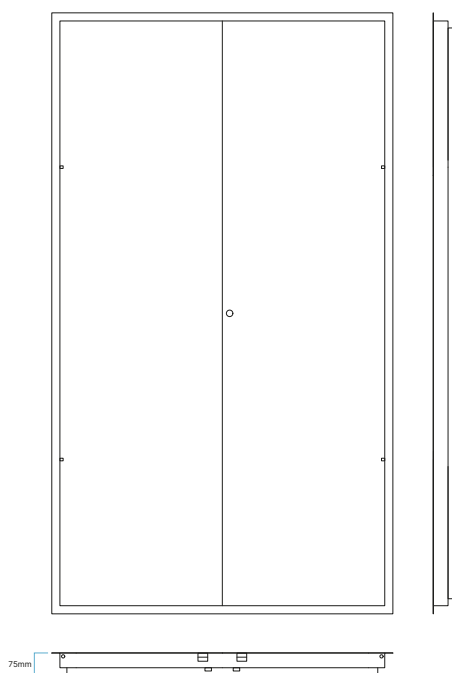


T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

Single Riser Doors



BLOCKWORK ENVIRONMENT



120 MINUTE FIRE RATED BOTH DIRECTIONS



MAXIMUM SIZES

SINGLE DOOR	DOUBLE DOOR
2300×1025mm	2300×2050mm



MADE IN THE UK



120Min Fire Rated



SMOKE TESTED




ACOUSTIC REDUCTION



BESPOKE PRODUCT

- 120-minute dual direction fire rating to BS EN 1634-1:2018
- 36dB sound reduction as per standard BS EN ISO 10140-2:2010
- Smoke tested to EN 1634-3:2004
- Insulated to 0.55 "U" Value

- Budget, Tamper Proof, FB2 or Euro Cylinder Key Lock options available
- Speed fit spring pin hinge
- Powder coated in Satin RAL 9010
- Complies to Part B Building Regulations

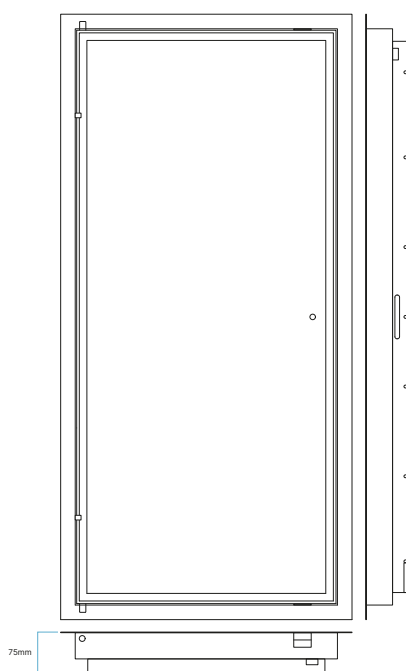

Single Ceiling Doors



90 MINS FIRE RATED



M A X I M U M S I Z E
1300 × 900mm



MADE IN THE UK



90Min Fire Rated



SMOKE TESTED




36dB
ACOUSTIC REDUCTION



BESPOKE PRODUCT

- E 90-minute fire rating to BS EN 1364-2:2018 in a stud & track ceiling.
- 36dB sound reduction as per standard BS EN ISO 10140-2:2010
- Smoke Leakage tests were to BS EN 1634-3:2004 Corr:2007
- Air Tested to class 2 BS EN 1026:2016
- Insulated to 0.55 "U" Value
- Budget, Tamper-Proof or Euro Cylinder Key Lock options available
- Speed fit spring pin hinge
- Powder coated in Satin RAL 9010
- Complies to Part B Building Regulations
- Bespoke UK manufactured

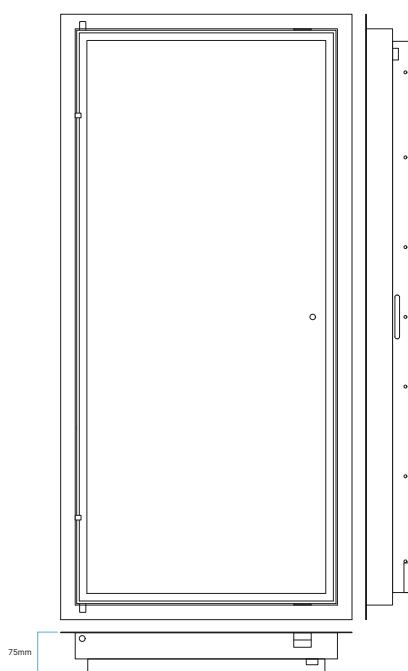

Electricity Meter Overbox

FR-MET-OVER-BX Internal Electricity Meter Overbox



INTERNAL FIXING



60 MIN
FIRE RATED



- 60 Minute Fire Rated to BS 476 PART22:1987.
- Can be hinged on the right or left side - no tools needed
- Maximum Size of 673 × 1153mm.
- Maximum depth of 155mm.
- Indoor use only.
- Budget, Tamper Proof or Key lock available.
- Power coated in Satin RAL 9010 white.
- Other RAL colour options available.



MADE IN THE UK



1Hr Fire Rated




BESPOKE AVAILABLE



LOCK OPTIONS

CODE	MIN-MAX WIDTH	MIN-MAX HEIGHT	MIN DEPTH	MAX DEPTH
FD-MET-OVER-BX	300-673mm	450-1153mm	50mm	155mm

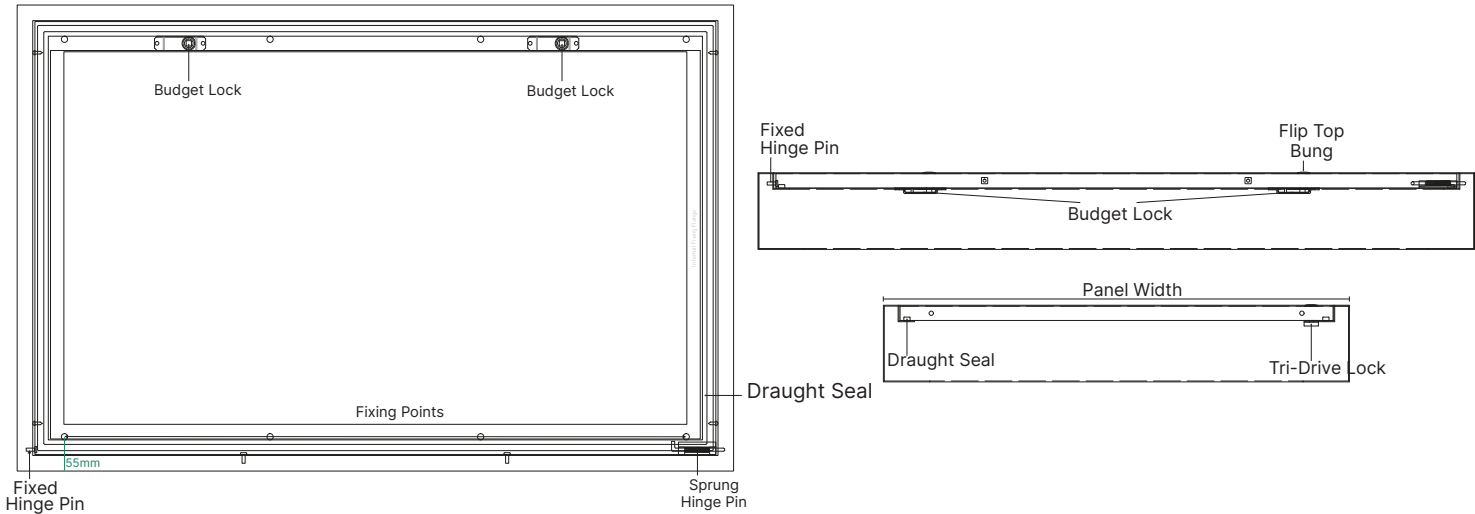

T: 01937 325 325 E: info@jupiterblue.co.uk



MET-BOX-INS For Use With EWI Retrofits



EXTERNAL FIXING



INTERNAL FIXING



- Electricity meter box, insulated and air sealed designed for use with external wall insulation retrofit.
- Door Hinged on either the right or the left side using the quick release hinges.
- Fits over the existing electricity meter housing.
- Calculated U Value 0.35 W/m²K.
- Fabricated from 1.2mm Zintec steel.
- Bespoke sizes and RAL colours available.






MADE IN THE UK



BESPOKE AVAILABLE



Scan the QR Code to
access the online size
calculator

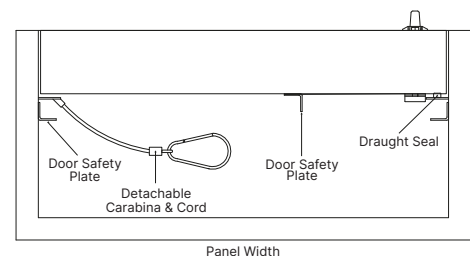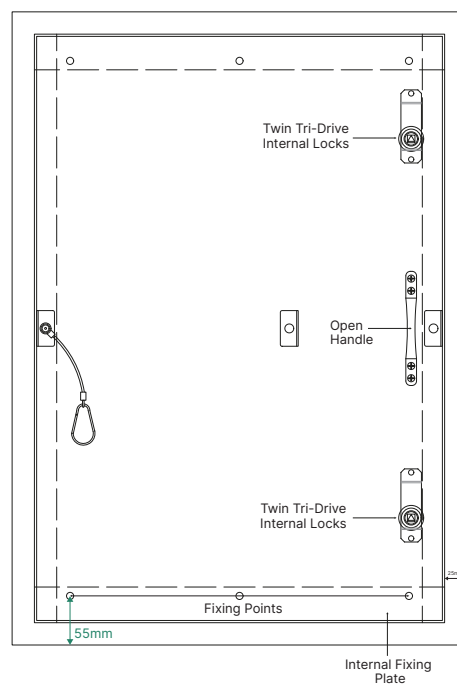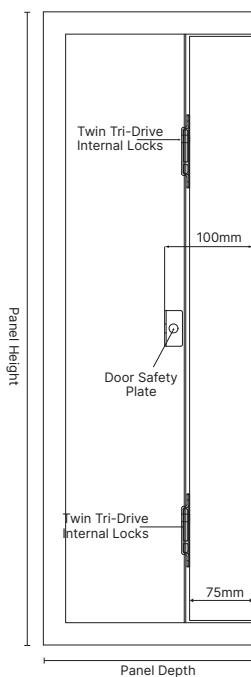

T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

Insulated GAS Meter Box

Fire Retardant

45

ACCESS PANELS

GAS-MET-INS For Use With EWI Retrofits



EXTERNAL FIXING



INTERNAL FIXING



- Gas meter box, insulated and air sealed designed for use with external wall insulation retrofit.
- fRsi of 0.87* which meets the requirements of PAS2035.
- Meets ventilation requirements of BS8499.
- Fits over the existing gas meter housing.
- U-Value of 0.30 W/m²K.
- Bespoke sizes and RAL colours available.






MADE IN THE UK



BESPOKE AVAILABLE



Scan the QR Code to
access the online size
calculator

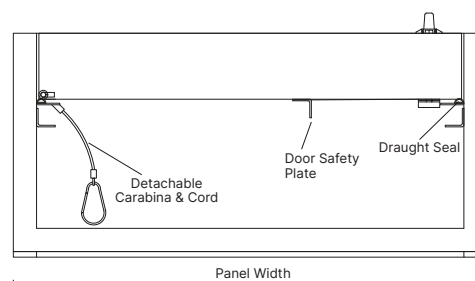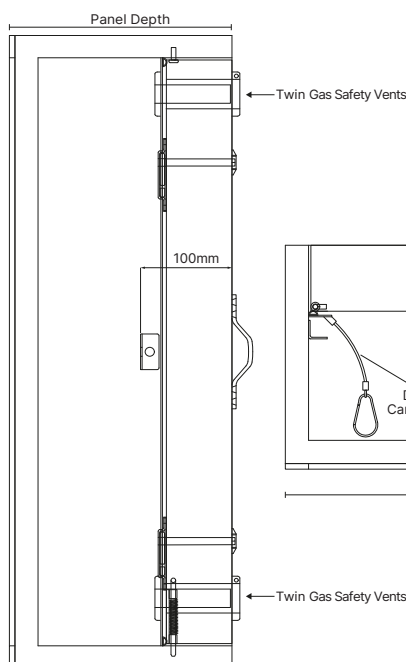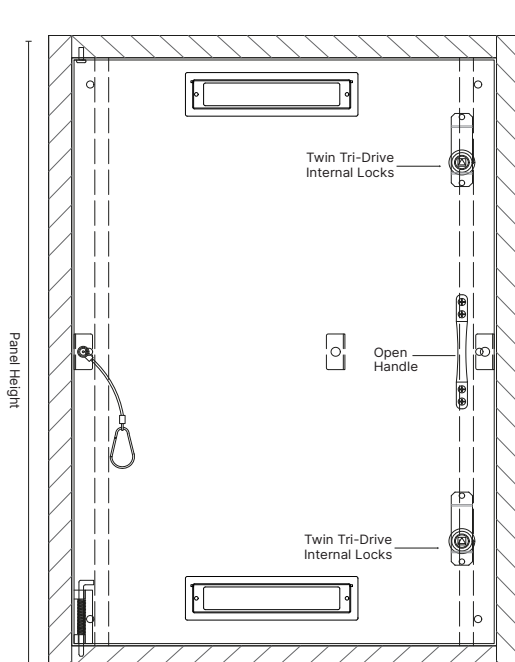

T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

LOFT HATCHES & LADDERS

CONTENT

High-Performance Loft Hatches

Engineering Access, Insulation, and Value

The Thermal Envelope - The loft hatch is a critical component of a building's thermal envelope. Traditional uninsulated timber hatches act as a thermal bridge, allowing significant heat transfer between the conditioned living space and the unheated roof void. Our modern range is designed to eliminate this leakage, providing superior draught sealing and insulation to meet rigorous environmental standards and reduce energy expenditure.

Manufacturing Excellence - We are proud to stock the UK's most extensive range of loft access solutions. By overseeing our own manufacturing, we maintain strict quality assurance and rapid speed-to-market for new innovations, such as our industry-leading airtight hatch range. All units come with a comprehensive **2-year manufacturer's guarantee**.

Specification Guide- To ensure the correct specification for your project, please evaluate the following criteria:

- **Structural Fit:** Compatibility with existing joist spacing and aperture dimensions.
- **Thermal Transmittance:** U-Value ratings and airtightness certification.
- **Operability:** Ease of access for maintenance and storage retrieval.
- **Installation:** Fitting requirements and compatibility with loft ladders.
- **Cost-Efficiency:** Balancing initial outlay against long-term energy savings.

AT Airtight Loft Hatch

AT Loft Hatch - U Value Options 0.35 - 0.15 w/m2k



The AT Range of loft hatches are compatible with our AL2, AL3 & AL3C residential loft ladders.

- The first class 4 airtight loft hatch of its kind
- Tested to BS EN 1026:2000 and BS EN 12207:2000
- Insulated to meet or exceed Part L of the Building Regulations
- 3 insulation U value 0.35 | 0.25 | 0.15 options available
- Projects only 2mm below the finished ceiling line
- Assessed at an incredibly low 0.34 m3/hr/m2 at 50 pa on the all important negative test direction
- Budget or key locking options available
- Opening pole available as separate item (not suitable for key lock)
- Zintec steel, powder-coated white RAL 9016



MADE IN THE UK



LOCK OPTIONS




AIR TESTED



U VALUE

CODE	STRUCTURAL OPENING REQUIRED	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
AT35	562 × 642mm	520 × 560mm	60mm	5.9kg	0.35 W/m2k
AT25	562 × 642mm	520 × 538mm	100mm	6.2kg	0.25 W/m2k
AT15	562 × 642mm	520 × 538mm	100mm	6.8kg	0.15 W/m2k

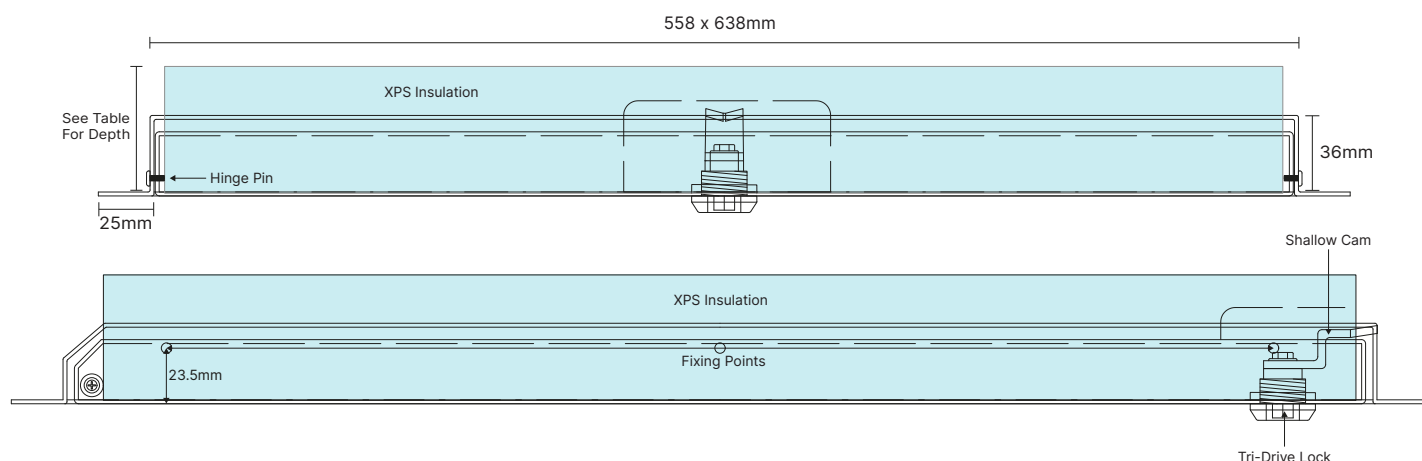

T: 01937 325 325 E: info@jupiterblue.co.uk



LT Loft Hatch - Flat lid Loft Hatch with decorative frame.




The LT Range of loft hatches are compatible with our AL2,AL3 & AL3C residential loft ladders.

- LT235 meets Part L of the Building Regulations
 - Fitted with draught seals
 - Choose between budget 35mm insulation or 55mm insulation
 - Fits a minimum structural opening of 560×720mm
(Can be fitted up to 580×740mm)
- Overall frame size 675 × 830mm
 - Opening pole available as separate item
 - Maintenance free and very simple to fit
 - Constructed from white injection moulded HIPS plastic
 - Thumb turn locking system



CODE	STRUCTURAL OPENING REQUIRED	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
LT2	562 × 722mm	533 × 655mm	39mm	3.1kg	0.78 W/m2k
LT235	562 × 722mm	533 × 635mm	42mm	3.5kg	0.35 W/m2k

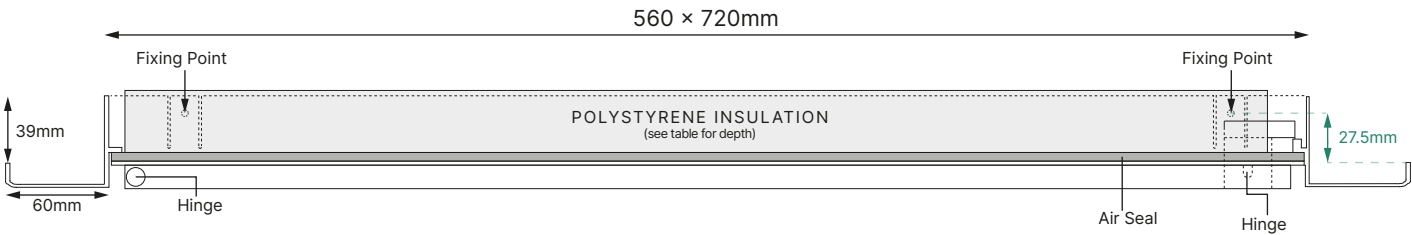

PD35 Loft Hatch

PD - Maintenance Free - Hinge Down Loft Access




The PD35 Range of loft hatches are compatible with our AL2,AL3 & AL3C residential loft ladders.

- Meets or exceeds Part L of the Building Regulations
 - Ultra low “U” value of 0.35 W/m²k
 - UKAS accredited air infiltration tested
 - A GWP and ODP rating of zero
 - Exceeds NHBC size requirements
- New slim contemporary, hinge down loft hatch
 - Constructed from white injection moulded HIPS plastic
 - The PD35 requires no decorating or maintenance
 - Thumb turn lock as standard - Key lock available



CODE	STRUCTURAL OPENING REQUIRED	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
PD35/PD35L	562 × 762mm	533 × 670mm	55mm	2.8kg	0.35 W/m2k

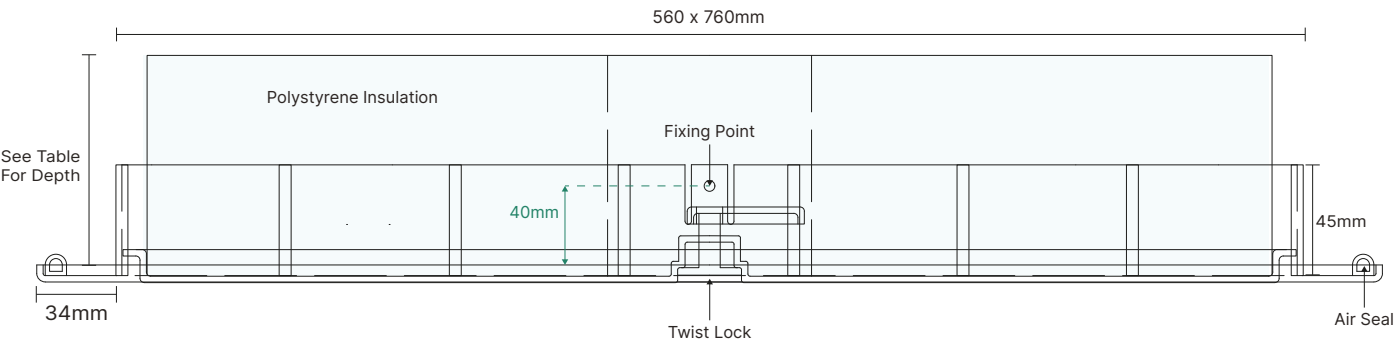

T: 01937 325 325 E: info@jupiterblue.co.uk



PD - Maintenance Free - Hinge Down Loft Access



The PD^{V2} Range of loft hatches are compatible with our AL2, AL3 & AL3C residential loft ladders.

- Meets or exceeds Part L of the Building Regulations
- 2 Insulation options - 52mm | 103mm to 0.35 & 0.25 "U" values
- UKAS accredited air infiltration tested
- A GWP and ODP rating of zero
- Exceeds NHBC size requirements
- New slim contemporary, hinge down loft hatch
- Constructed from white injection moulded HIPS plastic
- The PD requires no decorating or maintenance
- Opening pole available as separate item (not suitable for key lock)
- Thumb turn lock as standard - Key lock available



MADE IN THE UK



LOCK OPTIONS




AIR TESTED



U VALUE

CODE	STRUCTURAL OPENING REQUIRED	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
PD35V2	560 × 665mm	522 × 575mm	47mm	2.9kg	0.35 W/m2k
PD25V2	560 × 665mm	522 × 525mm	98mm	3.3kg	0.25 W/m2k

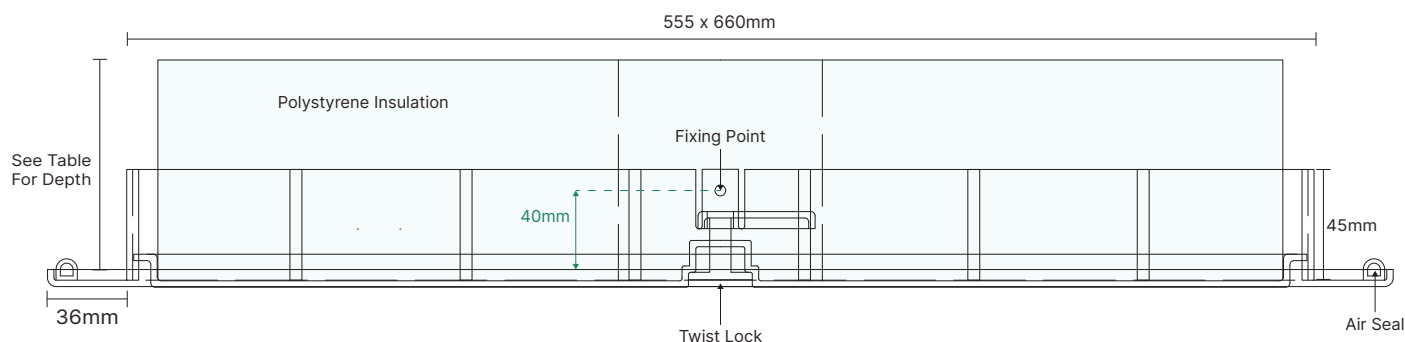

T: 01937 325 325 E: info@jupiterblue.co.uk



SD Fire Rated Loft Hatch

SD Fire Rated - Part B & Part L Compliant (5 Sizes)



The SD Range of loft hatches are compatible with our AL2, AL3 & AL3C residential loft ladders.



- UKAS accredited 1 hour fire test
- Tested to BS EN 1364-2:1999
- Complies with Part L Building Regulations
- Air tested to a superb result of 0.76m³/hr @ 50Pa
- Budget or key locking options available
- Zintec steel loft hatch in white RAL No. 9016 with 20% gloss
- Unrivalled insulation properties @ 0.32 "U" value
- Pole available as separate item (not suitable for Key Lock)
- Bespoke sizes up to a maximum of 900×900mm
- All sizes meet or exceed NHBC size requirements



MADE IN THE UK



FIRE RATED



LOCK OPTIONS



AIR TESTED




BESPOKE OPTIONS



U VALUE

CODE	STRUCTURAL OPENING REQUIRED AFTER LINING THE OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
SD-536X736	538 × 738mm	520 × 630mm	68mm	8.5kg	0.32 W/m ² k
SD-550X550	555 × 555mm	530 × 480mm	68mm	6.4kg	0.32 W/m ² k
SD-550X800	555 × 805mm	535 × 730mm	68mm	9.4kg	0.32 W/m ² k
SD-600X600	605 × 605mm	580 × 530mm	68mm	7.1kg	0.32 W/m ² k
SD-600X900	605 × 905mm	580 × 828mm	68mm	9.7kg	0.32 W/m ² k
SDS-FR & SDS-FR-OS (Bespoke)	Width over 600mm - Manufactured with twin locks		68mm	Varies	0.32 W/m ² k

Note: All openings need to be lined with 9.5mm fire rated plasterboard

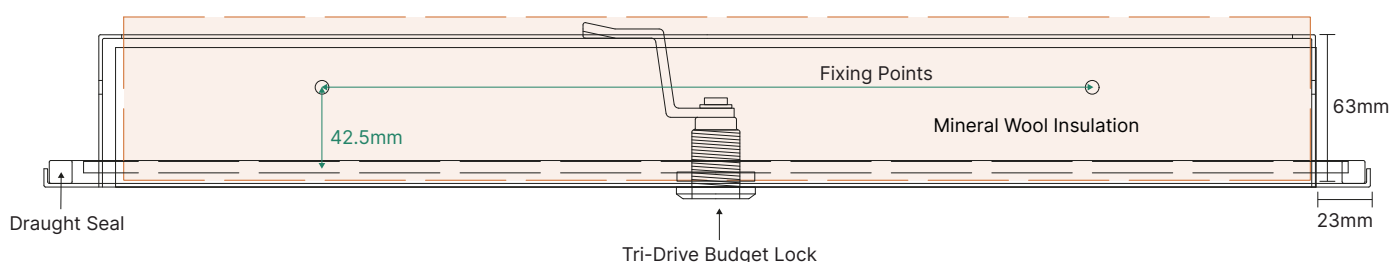

T: 01937 325 325 E: info@jupiterblue.co.uk




SP Fire Rated Loft Hatch

SP Loft Hatch - Push-Up Fire Rated Loft Hatch



- Budget zintec steel push-up 1 hour fire rated hatch
 - Adhoc fire test as per BS 476 Part 22
 - Air test to BS EN 1026:2000 and BS EN 12207:2000
 - Push up (not hinged)
- 80mm insulation on SP1 & SP2, 50mm on SP3
 - Bespoke sizes available
 - Draught sealed
 - Powdercoated in white RAL 9016

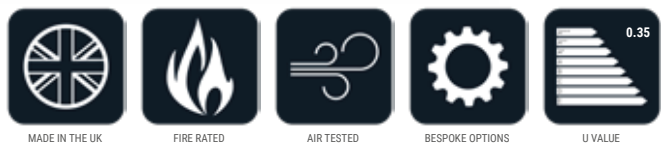

CODE	STRUCTURAL OPENING REQUIRED AFTER LINING THE OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	FRAME SIZE	U VALUE
SP1	538 × 538mm	520 × 520mm	93mm	4.5kg	35mm	0.35 W/m2k
SP2	538 × 738mm	520 × 712mm	93mm	6.1kg	25mm	0.35 W/m2k
SP3 (Bespoke)	Width over 600mm - Manufactured with twin locks		68mm	Varies	25mm	0.35 W/m2k


Note: All openings need to be lined with 9.5mm fire rated plasterboard




T: 01937 325 325 E: info@jupiterblue.co.uk



SDS-BF - Beaded Frame Loft Hatch

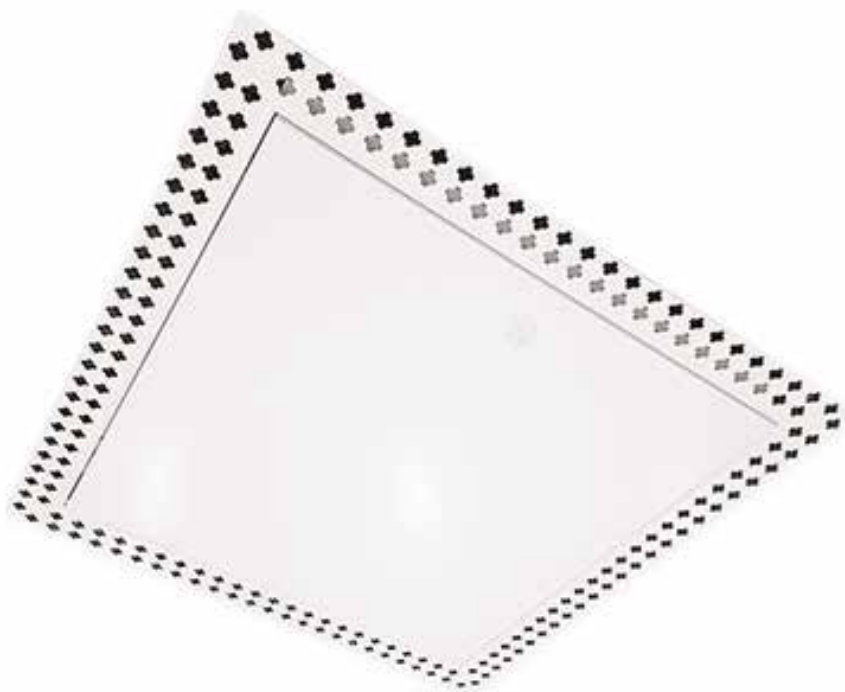


- Flush, skim-in beaded frame for a near-invisible finish
 - Made to your exact size (up to 1100 × 900mm)
 - Superb insulation — U-value 0.32
 - Excellent airtightness — 0.23 m³/m/hr @ 50 Pa
- Strong 1mm Zintec steel, powder-coated white
 - Free opening pole included
 - Handmade in the UK

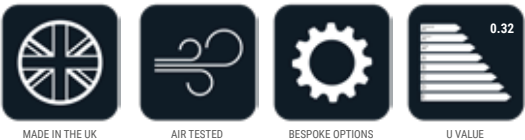

CODE	MIN/MAX LENGTH	MIN/MAX WIDTH	U VALUE
SDS-BF	400 - 1100mm	400 - 900mm	0.32 W/m2k

Bespoke Sizes Made To Order
Sizes up
900 × 1100mm

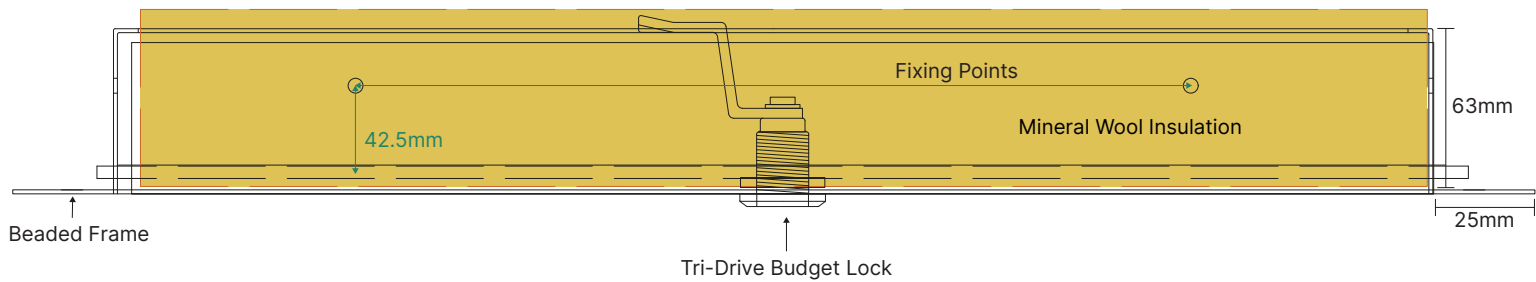


T: 01937 325 325 E: info@jupiterblue.co.uk




SDNL-Bespoke



- Inset Polycarbonate window for natural light
 - Designed with perimeter seals for weatherproofing
 - Durable construction for stability and long life
 - 25mm Five layered Opaque Polycarbonate
- Flush fitting hinged lid
 - Fixed price for any size up to 900 × 900mm
 - Window size is approx 100mm less than size ordered
 - Bespoke Product

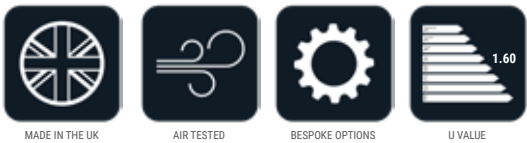

CODE	MAXIMUM WIDTH	MAXIMUM HEIGHT
SDNL	900mm	900mm

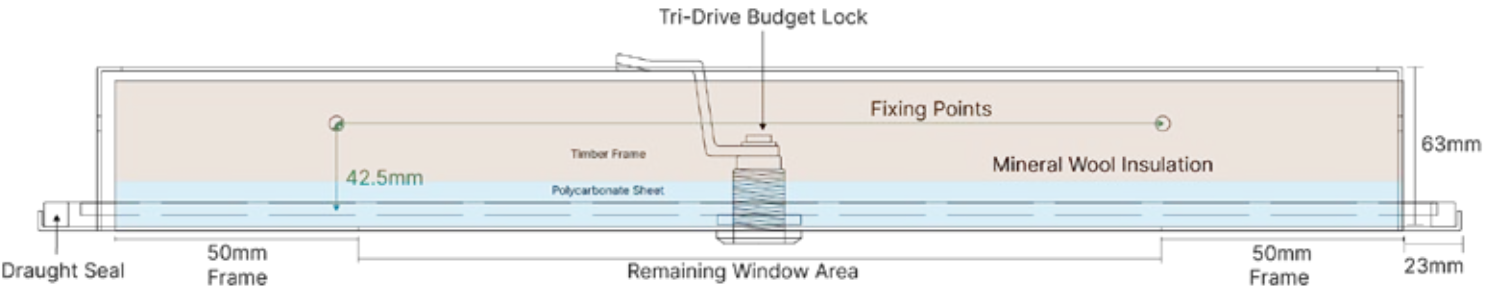

T: 01937 325 325 E: info@jupiterblue.co.uk




2 Section Domestic Loft Ladders

AL2 - 2 Section Loft Ladder With Hand Rail



EASY STOW
ACTION

Supplied with an Access Pole
to position the ladder into the
upwards or downwards mode.

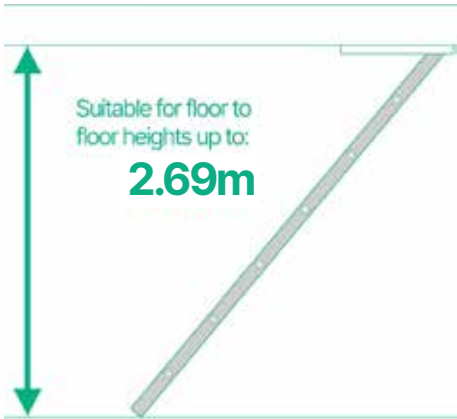

- Suitable for floor to floor heights up to 2.69 meters.
- Width (outer edge to outer edge 310mm).
- Wide non-slip 'D' Shape rungs
- 150KG weight limit.
- Safety Hand Rail
- Suitable for Domestic use only.



EN 14975 Standards

CODE	MAXIMUM FLOOR TO LOFT FLOOR HEIGHT	MINIMUM FLOOR TO LOFT FLOOR HEIGHT	MINIMUM CLEARANCE ARC	MINIMUM STORAGE SPACE
AL2	2.69m	2.13m	0.71m	1.27m



T: 01937 325 325 E: info@jupiterblue.co.uk



3 Section Domestic Loft Ladders

AL3 | AL3C Loft Ladder With Hand Rail

AL3



NONE
COUNTER BALANCED
SYSTEM

Supplied with an Access Pole
to position the ladder into the
upwards or downwards mode.



- Suitable for floor to floor heights up to 3 meters.
- Width (outer edge to outer edge 310mm).
- Easy to follow instructions for DIY installation.
- 150KG weight limit.
- Safety Hand Rail
- Suitable for **Domestic use only**.

AL3C



EASY STOW
COUNTER BALANCE
SYSTEM

Supplied with an Access Pole
to position the ladder into the
upwards or downwards mode.



- Suitable for floor to floor heights up to 3 meters.
- Width (outer edge to outer edge 310mm).
- 'Easy Stow' Counter Balance Operating System.
- 150KG weight limit.
- Safety Hand Rail.
- Suitable for **Domestic & Medium use only**.



EN 14975 Standards

CODE	MAXIMUM FLOOR TO LOFT FLOOR HEIGHT	MINIMUM LOFT OPENING WIDTH	MINIMUM CLEARANCE ARC	MINIMUM STORAGE SPACE
AL3	3.00m	0.38m	0.71m	1.12m
AL3-C	3.00m	0.38m	0.71m	1.12m



T: 01937 325 325 E: info@jupiterblue.co.uk



Domestic Access Ladders

57

ACCESS PANELS

OKP | OKP-S Domestic Wooden Ladders - Up to 2.85 Meters*

OKP



OKPS



***70mm Extension**
OKP & OKP-S



EN 14975 Standards



- 1130×550mm 3 Section Folding Ladder & Hatch Combined.
- Manufactured for UK Market to suit 560-565mm Joist opening.
- 26mm Insulated Door with a U-value of 1.22.
- Suits floor to ceiling heights of up to 2850mm.
- Comes as a complete unit with loft ladder, trapdoor, loft surround and all fittings.
- Suitable for **Domestic use only**.

- 1130×550mm 3 Section Folding Ladder & Hatch Combined.
- 26mm Insulated Door with a U-value of 1.22.
- Suits floor to ceiling heights of up to 2850mm.
- Comes as a complete unit with loft ladder, trapdoor, loft surround and all fittings.
- Wide, timber slip resistant treads & plastic slip resistant feet.
- Suitable for **Domestic use only**.

**This Product Can Be Fitted With An Extension
Adding 700mm To Either OKP Product**

Find it online by scanning the QR-Code below.



T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

THIS IS
jupiter blue

Commercial Access Ladders

58
ACCESS PANELS

AL4C | AL5C Heavy Duty Bespoke Ladders - Up to 5 Meters

AL4C



**EASY TO USE
COUNTER BALANCED
SYSTEM**

After placing an order,
we produce a drawing for
approval prior to production



BESPOKE PRODUCT

- Manufactured to EN 14975-2006A1-2010 – 150kg Class 'H'.
- Twin handrails and a choice of 75mm or 100mm tread depth.
- Easy to use counter balanced action.
- Made to order to suit any floor to floor height up to 5m.
- Operated via 'Long Arm' Pole.
- 150KG weight limit.

AL5C




**HOOK ON
LOFT LADDER**

After placing an order,
we produce a drawing for
approval prior to production



BESPOKE PRODUCT

- Manufactured to EN 14975-2006A1-2010 – 150kg Class 'H'.
- Twin handrails and a choice of 75mm or 100mm tread depth.
- Spur Depth of 35mm.
- Hook on loft ladder.
- Made to order to suit any floor to floor height up to 5m.
- 150KG weight limit.

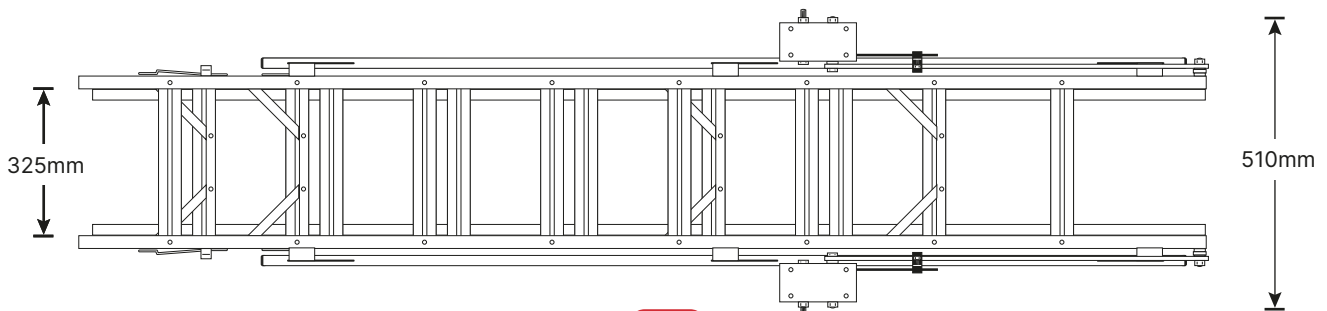

AL4C



EN 14975 Standards



T: 01937 325 325 E: info@jupiterblue.co.uk

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

jupiter blue

Zedfold Commercial Access Ladders

59
ACCESS PANELS

Zedfold | Zedfold Slim Heavy Duty Concertina Ladder - Up to 3390mm

Zedfold



Note: Hatch not included.
Photos showing the ladder fixed
to a hatch are for illustrative
purposes only.

- Manufactured from High Strength die cast Aluminium.
- Available in any length up to 3390mm.
- Max weight over entire ladder 500kg.
- Assisted lifting and lowering mechanism for easy use.
- Option for one or two handrails (at extra cost).




EN 14975 Standards

MODEL	CEILING HEIGHT	APERTURE WIDTH (MIN)	APERTURE LENGTH (MIN)
9 Tread	Up To 2500mm	605mm	580mm
10 Tread	2501 - 2790mm	605mm	620mm
11 Tread	2791 - 3090mm	605mm	660mm
12 Tread	3091 - 3390mm	610mm	700mm

Zedfold Slim



- Manufactured from High Strength die cast Aluminium.
- Smaller version of the heavy duty concertina ladder.
- Maximum Weight per tread 150kg.
- Max weight over entire ladder 350kg.
- Conforms to DIN EN 14975.



EN 14975 Standards

MODEL	CEILING HEIGHT	APERTURE WIDTH (MIN)	APERTURE LENGTH (MIN)
9 Tread	Up To 2500mm	450mm	540mm
10 Tread	2251 - 2500mm	450mm	580mm
11 Tread	2501 - 2750mm	450mm	620mm
12 Tread	2751 - 3000mm	450mm	660mm



T: 01937 325 325 E: info@jupiterblue.co.uk

The Jupiter Blue logo, featuring the text 'jupiter blue' in a stylized font with a small circle above the 'i' in 'jupiter'.

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

ROOF HATCHES

CONTENT

Comprehensive Roof Access Solutions

Safe, Efficient, and Durable Access to Your Building's Roof

Providing safe and reliable access to your roof is critical for maintenance, inspections, and equipment servicing. Our comprehensive range of roof access products is designed to meet the rigorous demands of commercial and industrial applications, ensuring safety and compliance without compromising on energy efficiency or budget.

High-Performance Roof Hatches - Our Roof Hatch range offers an essential, secure, and weatherproof point of access to the roof space. Designed for easy operation and long-term durability, we offer materials and specifications to suit every project.

Key Features & Benefits:

- **Superior Thermal Efficiency:** Our hatches are engineered to contribute to your building's energy efficiency. We offer models with exceptional thermal performance, with U-values as low as 0.43 (depending on material and specification), helping to reduce heat loss and lower utility costs.
- **Built to Last:** Manufactured from high-quality, corrosion-resistant materials, including Galvanised Steel and Durable Aluminium, ensuring longevity and performance in all weather conditions.
- **Easy Operation:** Designed for single-hand use, featuring gas spring assistance for smooth, controlled opening and closing.
- **Security:** Robust locking mechanisms provide security against unauthorized access.


Glazed Roof Access Hatches

61

ACCESS PANELS

Polycarbonate Glazed Roof Hatches

- **Single/Double/Triple/Quad** skin polycarbonate dome.
- Sleek, low rise dome with large daylight area.
- Can be fitted on roofs with pitch up to 15°.
- 3 kerb options
- Secure fixings
- All rectangular hatches are hinged on the long side.

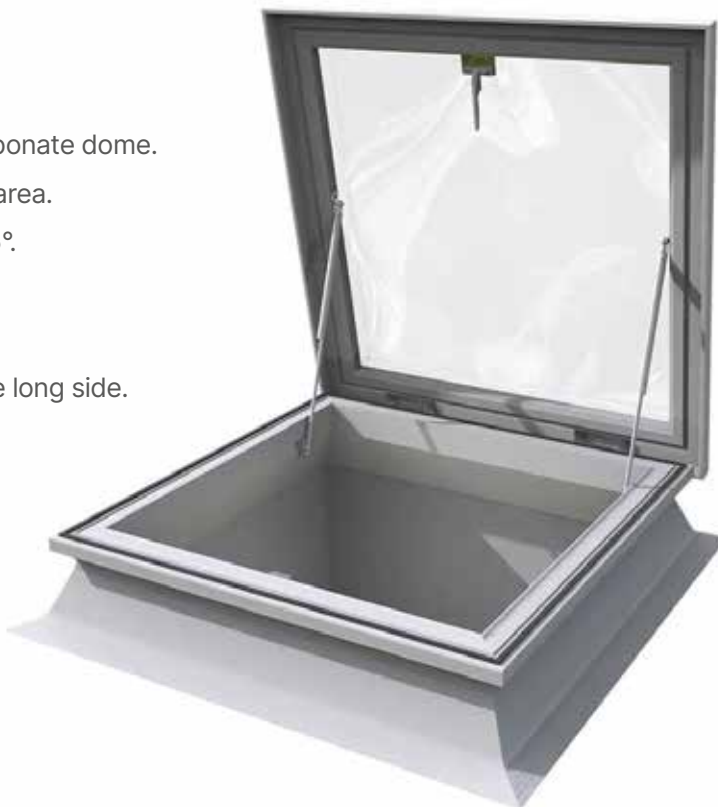

MADE IN THE UK

GLAZING OPTIONS AVAILABLE

SINGLE

1

GLAZED

SINGLE GLAZED

DOUBLE

2

GLAZED

DOUBLE GLAZED

TRIPLE

3

GLAZED

TRIPLE GLAZED

QUAD


4

GLAZED

QUAD GLAZED

GLAZING	U-VALUE DF KERB	U-VALUE 150/300MM PVC KERB	ACOUSTIC AIRBORNE SOUND INDEX
Single	N/A	N/A	12dB
Double	2.0 - 2.4W/m ² K	1.6 - 2.1 *W/m ² K	20dB
Triple	1.5 - 1.7 W/m ² K	1.2 - 1.5 *W/m ² K	22dB
Quad	1.3 - 1.4 W/m ² K	1.1 - 1.3 *W/m ² K	>22dB

DOMESIZE (MM)	OPENING ANGLE	TOLERANCE	DOMESIZE (MM)	OPENING ANGLE	TOLERANCE
900 × 750	83	±2	1350 × 900	75	±1
900 × 900	75	±1	1350 × 1050	75	±1
1050 × 750	83	±2	1500 × 750	83	±2
1050 × 900	75	±1	1500 × 900	75	±1
1050 × 1050	75	±1	1500 × 1050	75	±1
1200 × 750	83	±2	1650 × 750	83	±2
1200 × 900	75	±1	1650 × 900	75	±1
1200 × 1050	75	±1	1650 × 1050	75	±1
1200 × 1200	70	±1	1800 × 750	83	±2
1350 × 750	83	±2	1800 × 900	75	±1

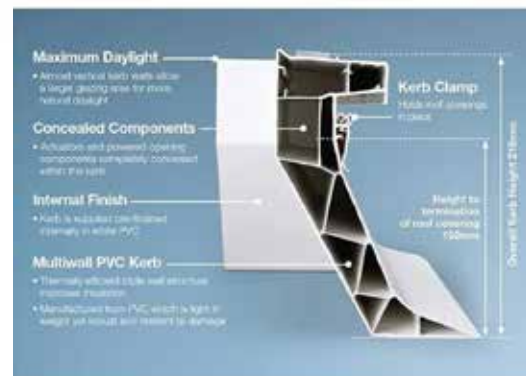

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

Premium Aluminium Roof Hatch

62

ACCESS PANELS



MADE IN THE UK

- Single leaf Aluminium Roof Hatch c/w 50mm thick twin foil backed PIR insulation.
- Insulated to an industry leading U value of 0.43 W/m2K.
- Air Permeability BS EN 12207: 100pa (Class 4).
- Secure design.
- Fitted with twin gas assisted struts for easy opening c/w auto lock open strut.
- Supports a live load of 200 Kg per m2.
- The largest range of stock sizes for next day delivery on the internet.

Finish Options:



- Mill Finish Aluminium
- Single Colour Powder Coated
- Dual Colour Powder Coated



CODE	LOCK	"U" Value	
SRHA-600×600	Internal Cab Lock/External Push Button	0.43	600×600mm
SRHA-600×900*	Internal Cab Lock/External Push Button	0.43	600×900mm
SRHA-750×750	Internal Cab Lock/External Push Button	0.43	750×750mm
SRHA-750×900*	Internal Cab Lock/External Push Button	0.43	750×900mm
SRHA-900×900	Internal Cab Lock/External Push Button	0.43	900×900mm
SRHA-1000×1000	Internal Cab Lock/External Push Button	0.43	1000×1000mm
SRHA-1350×750**	Internal Cab Lock/External Push Button	0.43	1350×750mm

Hinged on the short side*

Hinged on the long side**

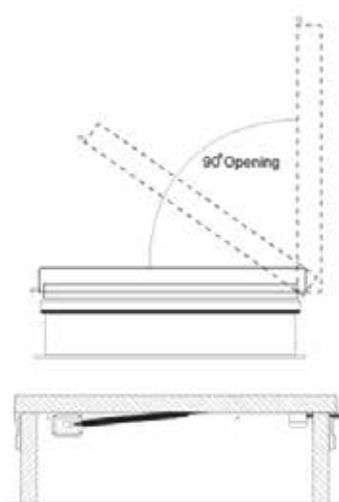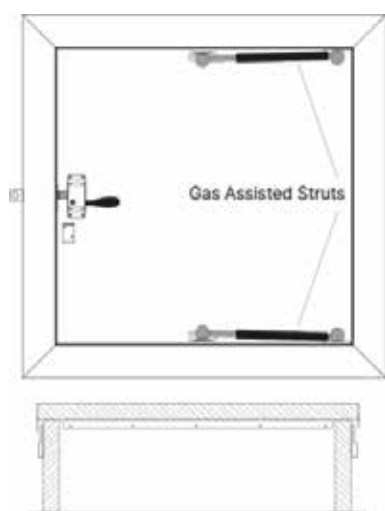

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

Premium Steel Roof Hatch

63

ACCESS PANELS



MADE IN THE UK

- Single leaf Steel Roof Hatch c/w 50mm thick twin foil backed PIR insulation.
- Insulated to an industry leading U value of 0.43 W/m2K.
- Air Permeability BS EN 12207: 100pa (Class 4).
- Secure design.
- Fitted with twin gas assisted struts for easy opening c/w auto lock open strut.
- Supports a live load of 200 Kg per m2.
- The largest range of stock sizes for next day delivery on the internet.

Finish Options:



- Mill Finish Steel
- Single Colour Powder Coated
- Dual Colour Powder Coated



CODE	LOCK	"U" Value	
SRHS-600×600	Internal Cab Lock/External Push Button	0.43	600×600mm
SRHS-600×900*	Internal Cab Lock/External Push Button	0.43	600×900mm
SRHS-750×750	Internal Cab Lock/External Push Button	0.43	750×750mm
SRHS-750×900*	Internal Cab Lock/External Push Button	0.43	750×900mm
SRHS-900×900	Internal Cab Lock/External Push Button	0.43	900×900mm
SRHS-1000×1000	Internal Cab Lock/External Push Button	0.43	1000×1000mm
SRHS-1350×750**	Internal Cab Lock/External Push Button	0.43	1350×750mm

Hinged on the short side*

Hinged on the long side**

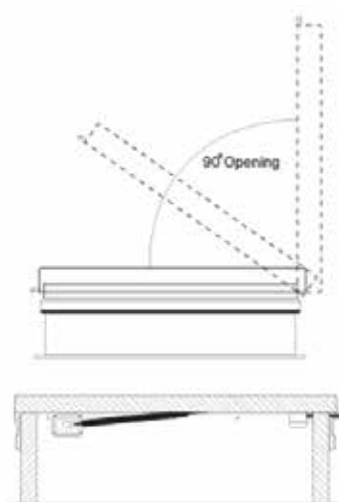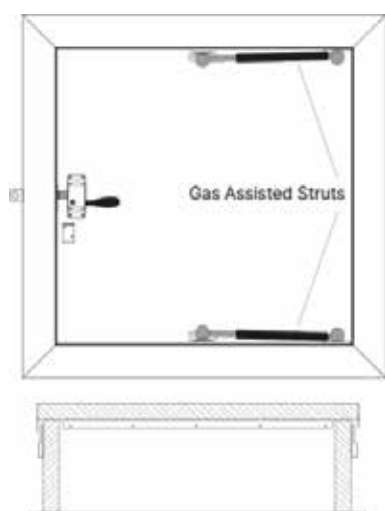

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

AOV SMOKE VENTS

CONTENT

Em-Vent Automatic Opening Vents (AOVs): Certified Smoke Ventilation Solutions

Em-Vents are cutting-edge, electrically operated smoke vent rooflights designed to safeguard your building and its occupants during a fire. As Automatic Opening Vents (AOVs), they efficiently open to reduce the build-up of smoke and heat, keeping critical escape routes like corridors and stairwells accessible.

Key Features & Benefits:



- **Fully Certified:** CE marked and certified to **BS EN 12101-2**, fully compliant with UK Building Regulations **ADB** (Fire Safety) and **ADL** (Conservation of Fuel and Power).
- **Rapid Opening:** Opens to an industry-leading **160°** angle in less than 60 seconds, exceeding the requirements of the Smoke Vent Standard BS EN 12101-2.
- **Dual Functionality:** While primarily for smoke control, Em-Vents can also be used for comfort ventilation and as electrically operated access hatches.
- **Security:** Robust locking mechanisms provide security against unauthorized access.
- **High Security:** Supplied standard with patented, high-security screwbolts.

Offset Actuator

- AOV Smoke Vent comprising of a PVC kerb with a polycarbonate dome.
- AOV smoke vents with offset actuators combine. Smoke Ventilation with access.
- All AOVs are designed to automatically extract smoke in the event of a fire.
- Typically sited on flat roofs above corridors and stairwells the vents open to an angle of 140 degrees in less than 60 seconds.
- 10 Year Guarantee
- CE Marked
- Secure by design



AOV Free Area:

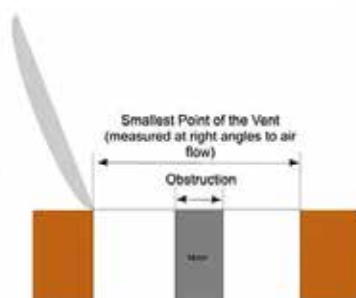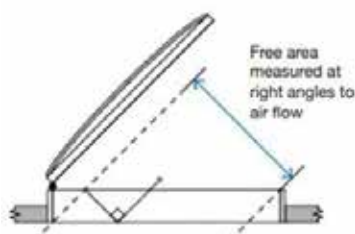

The range is fully tested and certified in accordance with BS EN 12101-2.

Covering standards for safety, security, non-fragility and fire safety with the

full guarantee of an established, accredited UK manufacturer. Fully certified to approved document B.

SMOKE VENT SIZE (MM)	DAYLIGHT FREE AREA SIZE* (MM)	ROOF OPENING AREA (M2)	APPROX. CLEAR OPENING SIZE (MM)
1050 × 1050	900×900	1.1	900 × 650
1200×1050	1050×900	1.26	1050 × 675
1200×1200	1050×1050	1.44	1050 × 750
1350×1050	1200×900	1.42	1200 × 600
1350×1200	1200×1050	1.62	1200 × 675
1350×1350	1200×1200	1.82	1200 × 750
1500×1050	1350×900	1.58	1350 × 525
1500×1200	1350×1050	1.8	1350 × 600
1500×1350	1350×1200	2.03	1350 × 675
1500×1500	1350×1350	2.25	1350 × 750
1650×1050	1500×900	1.73	1500 × 450
1650×1200	1500×1050	1.98	1500 × 525
1650×1350	1500×1200	2.23	1500 × 600
1650×1500	1500×1350	2.48	1500 × 675
1650×1650	1500×1500	2.72	1500 × 750



T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue


Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF

Central Actuator

- AOV Smoke Vent comprising of a PVC kerb with a polycarbonate dome.
- AOV smoke vents with offset actuators combine. Smoke Ventilation with access.
- All AOVs are designed to automatically extract smoke in the event of a fire.
- Typically sited on flat roofs above corridors and stairwells the vents open to an angle of 140 degrees in less than 60 seconds.
- 10 Year Guarantee
- CE Marked
- Secure by design



AOV Free Area:

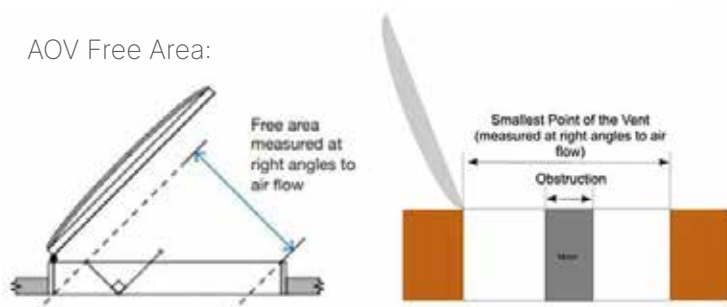

The range is fully tested and certified in accordance with BS EN 12101-2.

Covering standards for safety, security, non-fragility and fire safety with the

full guarantee of an established, accredited UK manufacturer. Fully certified to approved document B.

SMOKE VENT SIZE (MM)	DAYLIGHT FREE AREA SIZE* (MM)	ROOF OPENING AREA (M2)	APPROX. CLEAR OPENING SIZE (MM)
1050 × 1050	900×900	1.1	900 × 650
1200×1050	1050×900	1.26	1050 × 675
1200×1200	1050×1050	1.44	1050 × 750
1350×1050	1200×900	1.42	1200 × 600
1350×1200	1200×1050	1.62	1200 × 675
1350×1350	1200×1200	1.82	1200 × 750
1500×1050	1350×900	1.58	1350 × 525
1500×1200	1350×1050	1.8	1350 × 600
1500×1350	1350×1200	2.03	1350 × 675
1500×1500	1350×1350	2.25	1350 × 750
1650×1050	1500×900	1.73	1500 × 450
1650×1200	1500×1050	1.98	1500 × 525
1650×1350	1500×1200	2.23	1500 × 600
1650×1500	1500×1350	2.48	1500 × 675
1650×1650	1500×1500	2.72	1500 × 750



T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Accessories

Fire Switch for AOV Smoke Vent



Function: Alarm (open), reset and off, sound indicator
LED indication: "ok", "error" (yellow), "alarm activated" (red)

Size: 125 mm x 125 mm x 36 mm (W x H x D)

Colour: Orange, (grey available on request)

Protection degree: IP40

Consumption on error: 2.2 mA

Fire Brigade Priority Switch for AOV Smoke Vent



Priority Switch allowing Fire Brigade to control AOV Smoke Vents

Note: Only one priority switch per control panel

Control Panel for AOV Smoke Vent



AOV Control Panel - approved and tested for use with our range of AOV Smoke Vents

Needed to control your AOV and take inputs from additional controls or sensors such as Smoke Sensors and Fire Brigade switches

Allows manual opening and closing of AOV

Two versions; 5A and 8A depending on the size of your AOV Smoke Vent.

Smoke Detector for AOV Smoke Vent



Photo-electric detection of light scattered by smoke particles over a wide range of angles. The optical arrangement comprises an infra-red emitter with a prism and a photo-diode at 90° to the light beam with a wide field of view.

The integral LED flashes when the detector is in a quiescent state.



LOCKING OPTIONS

Security & Customization:

Our Access Panels are available with a **variety of security locking systems** to match your specific requirements. Looking for enhanced security? Optional locking system upgrades are clearly listed on each item page.



Tri-Drive Lock

This is the standard lock on our fire rated loft hatches and insulated access panels. It's airtight seal means that it works with our insulated hatches to reduce air and smoke transfer.



Key Lock

A more secure lock option to the budget lock, with slight variation on locks and keys depending on the type of panel that is installed in. Supplied as keyed alike for convenience.

Budget Lock

The standard lock supplied on the majority of our access panels. A recessed lock that is operated with square headed t-key. Each panel comes with a plastic bung or metal to cover the lock hole when not in use.



7 Pin-Tumbler Lock

A more secure keylock option for our fire rated loft hatches and access panels. It's airtight seal means that it works in harmony with our insulated hatches to reduce air and smoke transfer. Supplied as keyed alike for convenience.



Tamper Proof Lock

Another more secure option for our metal panels than the budget lock. Can be supplied on both fire rated and non-fire rated panels.

Hidden Latching Lock

A discrete touch latch mechanism that is only available on non-fire rated access panels. The front of the panel will have no visible lock and the door can just be gently pushed and released in order to allow access.



Fire Brigade Lock

Emergency services carry a set of keys to allow access quickly and easily should it be required. Most commonly supplied as an FB2 lock, these locks are more secure than the standard budget locks and tend to be used in communal areas.

PROJECT BIM



Design Smarter with BIM

We understand the demands of modern architecture and construction. That's why we offer comprehensive Building Information Modeling (BIM) files for the majority of our product portfolio.

Our high-quality, data-rich models are designed to integrate seamlessly into your preferred BIM software, enabling:

- **Faster Specification:** Easily place our products into your designs with accurate dimensions and appearance.
- **Enhanced Collaboration:** Improve coordination and reduce errors during the design and construction phases.
- **Better Decision Making:** Leverage embedded product data for sustainability analysis, facility management, and project lifecycle planning.
- **Accurate Physical Properties:** Dimensions, weight, and material specifications.
- **Performance Data:** Technical ratings and compliance information.

Downloading and integrating our BIM files ensures data integrity from the initial concept through to facility management, offering maximum efficiency and confidence on every project.

Find BIM files listed on every product's dedicated webpage.