

EAP-INS-AT External Access Panel


EAP-INS-AT Picture Frame External Access Panel



- Air Tested in a UKAS approved facility.
- Smoke tested to BS EN 1634-3:2004.
- Insulated with foil backed PIR insulation to 0.35 U-Value.
- UKAS tested to provide 36dB acoustic reduction.
- Secure key radial tumbler lock.
- Primed with electrostatic rust inhibitive powder coating.
- Powder-coated in white RAL9010 with satin finish.
- Bespoke sizes available.



CODE	PANEL SIZE	U VALUE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
EAP-INS-AT-300X300	300 × 300mm	0.35	305 × 305mm	350 × 350mm	280 × 255mm	33mm	2.9kg
EAP-INS-AT-450X450	450 × 450mm	0.35	455 × 455mm	500 × 500mm	430 × 375mm	63mm	4.3kg
EAP-INS-AT-600X600	600 × 600mm	0.35	605 × 605mm	650 × 650mm	580 × 525mm	63mm	5.9kg

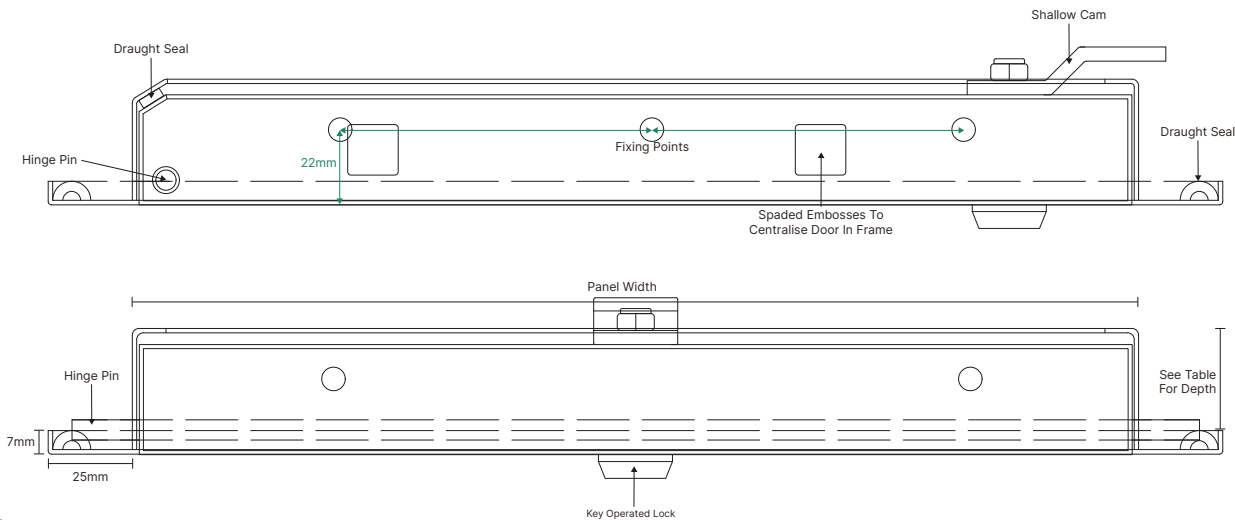

T: 01937 325 325 E: info@jupiterblue.co.uk

