

Anti-Ligature Access Panel

ANTILIG-PF or ANTILIG-BF



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- Certified to a minimum 60 minute fire rating.
 - Smoke Tested to BS EN 1634-3:2004.
 - Fire tested to BS 476 Part 22, in walls and ceilings.
 - Sound tested to provide 36dB acoustic reduction.
- Steel Access Panel designed to prevent the attachment of ligatures.
 - Supplied with key lock.
 - Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION
36dB





SMOKE TESTED



SAFETY PRODUCT

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
ANTILIG-PF/BF-150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	52mm	1.3kg
ANTILIG-PF/BF-200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	52mm	1.9kg
ANTILIG-PF/BF-300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 264mm	52mm	3.2kg
ANTILIG-PF/BF-350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	52mm	3.9kg
ANTILIG-PF/BF-450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	52mm	5.5kg
ANTILIG-PF/BF-550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	52mm	7.1kg
ANTILIG-PF/BF-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	564 × 235mm	52mm	5.6kg
ANTILIG-PF/BF-600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	52mm	8.4kg

*Hinged long side

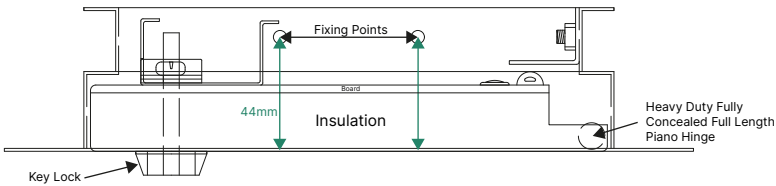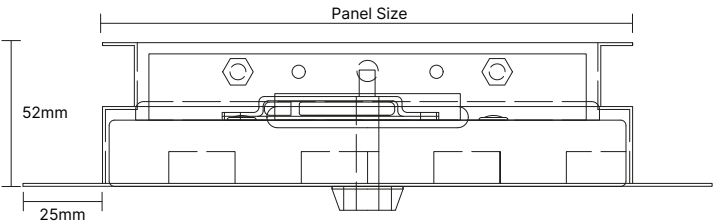

Anti-ligature Disclaimer

The anti-ligature design elements of this access panel are not intended to replace the need for necessary supervision of those who may be at risk, or for other mandatory protective measures to be utilised for the specific usage. We do not offer any products for sale as being "ligature-free" and will not be liable for claims associated with ligature attachment on its hatches/panels



T: 01937 325 325 E: info@jupiterblue.co.uk

