

PFFD-INS-AT Fire Rated Access Panel

31

ACCESS PANELS

PFFD-INS-AT Insulated & Air Tested Fire Rated Panel



- Certified to a minimum 60 minute fire rating.
- 36dB sound reduction on UKAS test.
- Insulated and Air Tested to current building regs.
- Picture Frame only.
- Fire Tested to BS EN 1634-1:2008 & BS EN 1364-2:1999 or BS476 Part22.
- BS EN 1634-3 Smoke Test - 0.08 m³/hr/m
- Budget or 7 Pin Radial Tumbler Locking Options.
- Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION
36dB



AIR TESTED




LOCK OPTIONS



U VALUE
0.35
0.77

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
PFFD-INS-AT-150×150	150 × 150mm	155 × 155mm	200 × 200mm	130 × 105mm	33mm	1.9kg	0.77
PFFD-INS-AT-200×200	200 × 200mm	205 × 205mm	250 × 250mm	180 × 155mm	33mm	2.2kg	0.77
PFFD-INS-AT-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	210 × 105mm	33mm	2.2kg	0.77
PFFD-INS-AT-300×300	300 × 300mm	305 × 305mm	350 × 350mm	280 × 250mm	33mm	2.9kg	0.77
PFFD-INS-AT-350×350	350 × 350mm	355 × 355mm	400 × 400mm	330 × 305mm	33mm	3.2kg	0.77
PFFD-INS-AT-450×450	450 × 450mm	455 × 455mm	500 × 500mm	430 × 375mm	63mm	4.3kg	0.35
PFFD-INS-AT-550×550	550 × 550mm	555 × 555mm	600 × 600mm	530 × 575mm	63mm	5.5kg	0.35
PFFD-INS-AT-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	580 × 250mm	63mm	4.1kg	0.35
PFFD-INS-AT-600×600	600 × 600mm	605 × 605mm	650 × 650mm	580 × 525mm	63mm	5.9kg	0.35

*Hinged long side

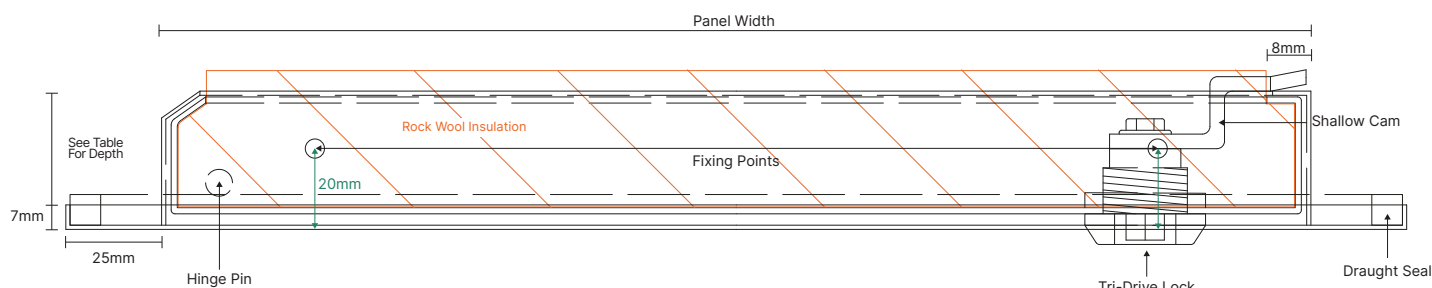

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF