

PFFD-INS-40dB Acoustic Access Panel

34

ACCESS PANELS

PFFD-INS-40dB Picture Frame or BFFD-INS-40dB Beaded Frame



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- 40dB sound reduction on UKAS test.
- Certified to a minimum 60 minute fire rating.
- BS EN 1634-3 smoke test .22 M3/hr/lm.
- 0.45 U-value.
- Budget or Tamper Proof Locking Options.
- Powder-coated in white RAL9010 with satin finish.
- Tested to BS476 - Part 22: 1987.



MADE IN THE UK



1Hr Fire Rated



ACOUSTIC REDUCTION




SMOKE TESTED



LOCK OPTIONS

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-INS-40dB-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	2.6kg
PFFD/BFFD-INS-40dB-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	3.3kg
PFFD-INS-40dB-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	212 × 132mm	50mm	2.3kg
PFFD/BFFD-INS-40dB-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.9kg
PFFD/BFFD-INS-40dB-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.9kg
PFFD/BFFD-INS-40dB-400×400	400 × 400mm	405 × 405mm	450 × 450mm	335 × 361mm	50mm	6.3kg
PFFD/BFFD-INS-40dB-450×450	450 × 450mm	455 × 455mm	500 × 400mm	370 × 412mm	50mm	8.6kg
PFFD/BFFD-INS-40dB-500×500	500 × 500mm	505 × 505mm	550 × 550mm	433 × 462mm	50mm	7.5kg
PFFD/BFFD-INS-40dB-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	11.2kg
PFFD/BFFD-INS-40dB-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	8.1kg
PFFD/BFFD-INS-40dB-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	13.4kg
PFFD/BFFD-INS-40dB-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	865 × 520mm	50mm	17.8kg

*Hinged long side

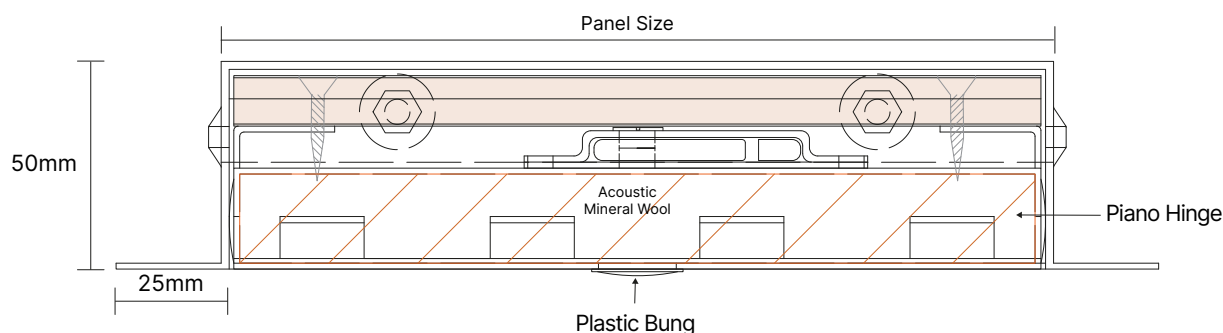

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF