

AT Airtight Loft Hatch

AT Loft Hatch - U Value Options 0.35 - 0.15 w/m2k



The AT Range of loft hatches are compatible with our AL2, AL3 & AL3C residential loft ladders.

- The first class 4 airtight loft hatch of its kind
- Tested to BS EN 1026:2000 and BS EN 12207:2000
- Insulated to meet or exceed Part L of the Building Regulations
- 3 insulation U value 0.35 | 0.25 | 0.15 options available
- Projects only 2mm below the finished ceiling line
- Assessed at an incredibly low 0.34 m3/hr/m2 at 50 pa on the all important negative test direction
- Budget or key locking options available
- Opening pole available as separate item (not suitable for key lock)
- Zintec steel, powder-coated white RAL 9016



MADE IN THE UK



LOCK OPTIONS




AIR TESTED



U VALUE

CODE	STRUCTURAL OPENING REQUIRED	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
AT35	562 × 642mm	520 × 560mm	60mm	5.9kg	0.35 W/m2k
AT25	562 × 642mm	520 × 538mm	100mm	6.2kg	0.25 W/m2k
AT15	562 × 642mm	520 × 538mm	100mm	6.8kg	0.15 W/m2k

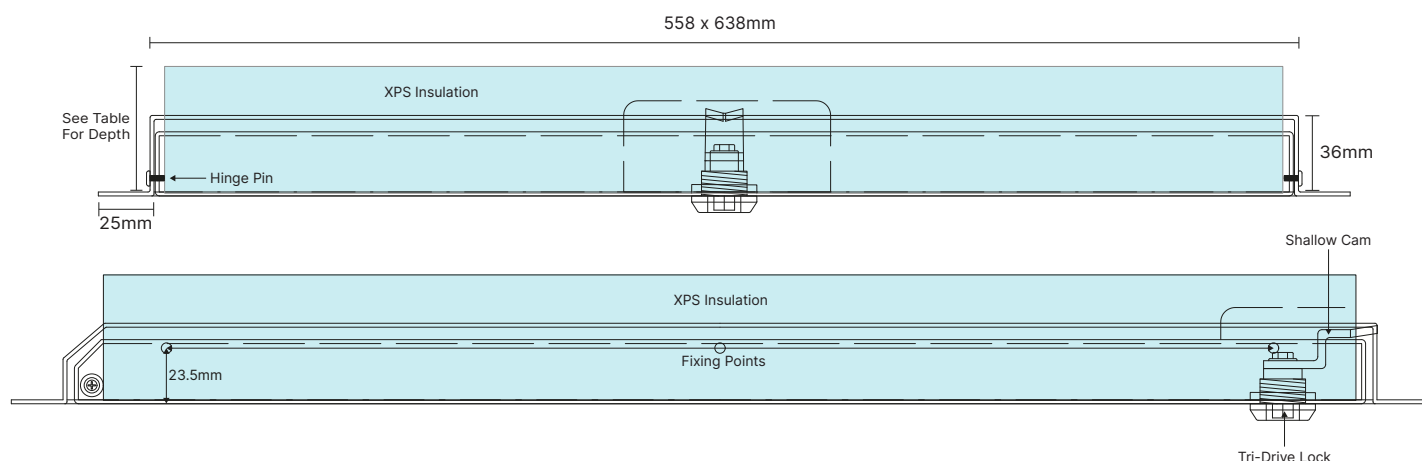

T: 01937 325 325 E: info@jupiterblue.co.uk

