

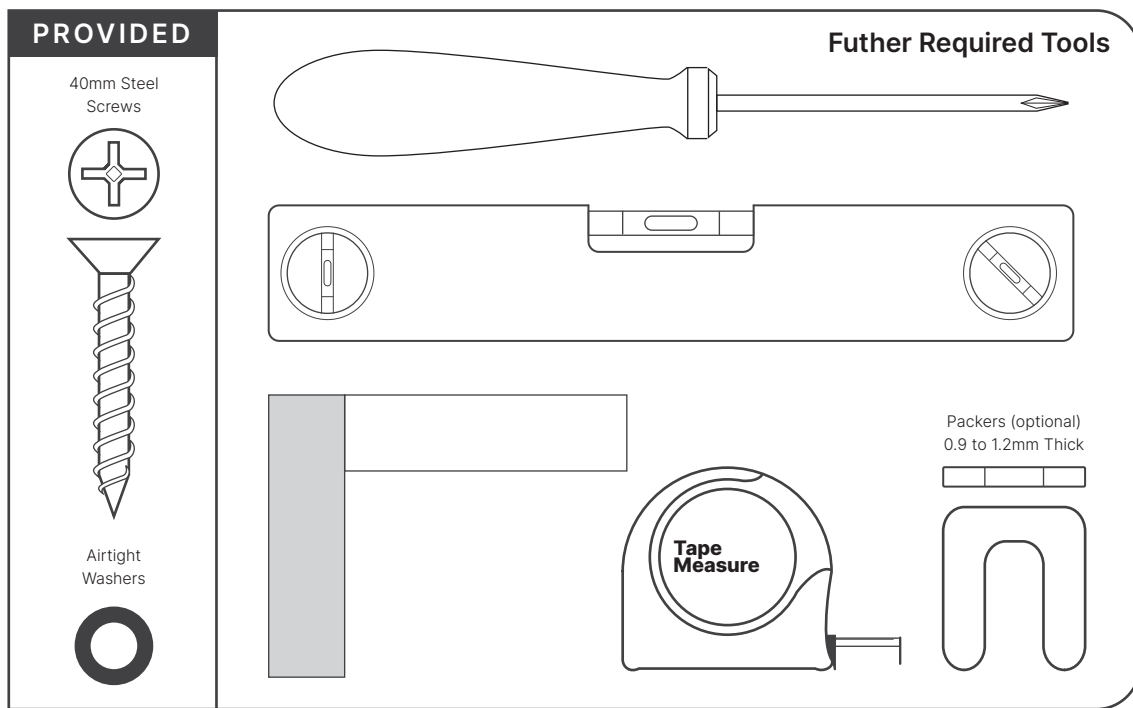


AIR TIGHT AT LOFT HATCH

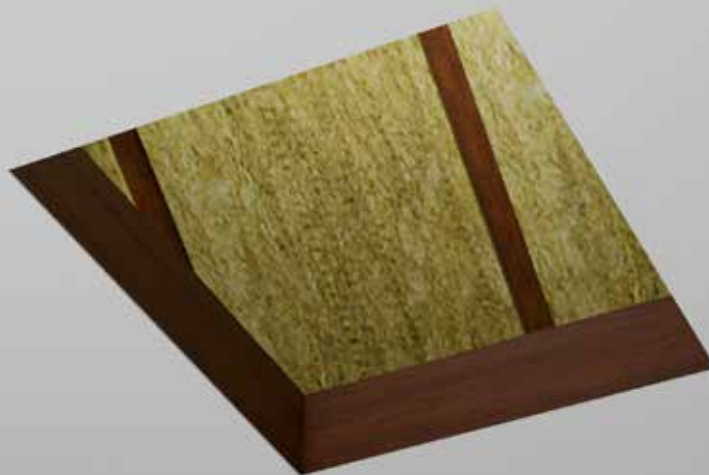


1

Trim out an opening to a minimum of 562 × 642mm (+5mm maximum if required).


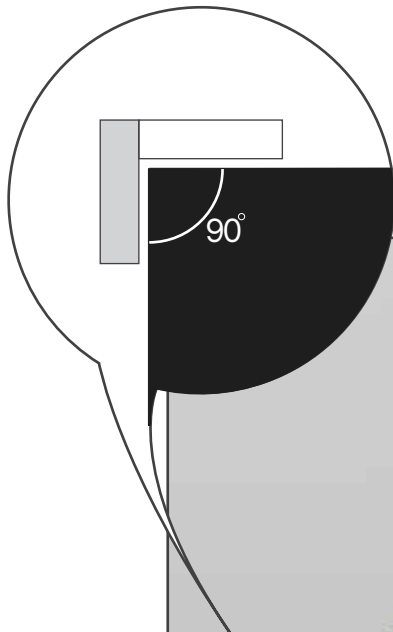


2

Open the hatch 90° and locate the frame into the prepared structural opening.

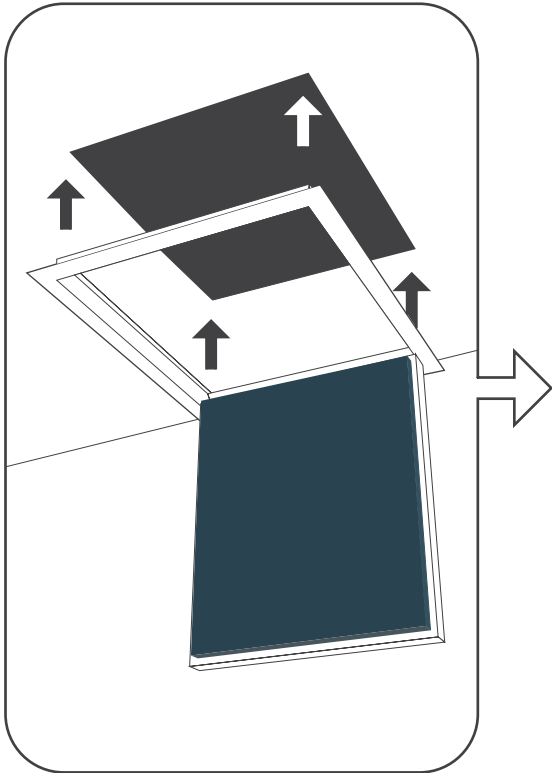**3**


Push the frame tightly against the ceiling to engage the airtight seal between the frame and the ceiling.

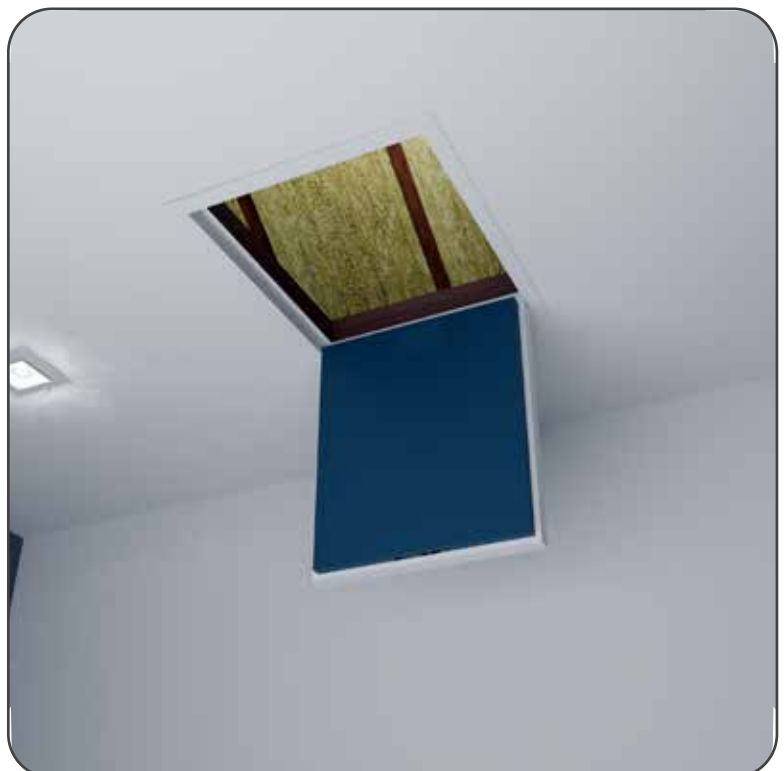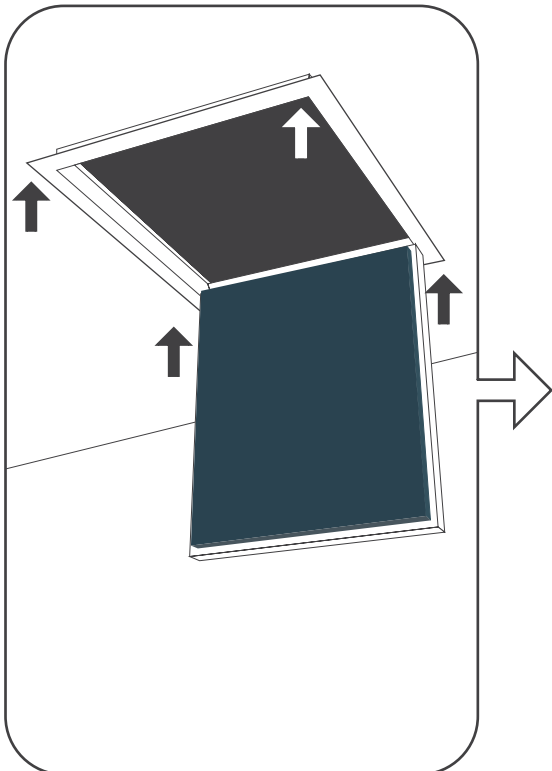



4

Place the rubber washers onto the 40mm fixing screws.

Fix the frame using all 6 screws through the pre-punched holes, found on the sides of the frame (do not fully tighten).

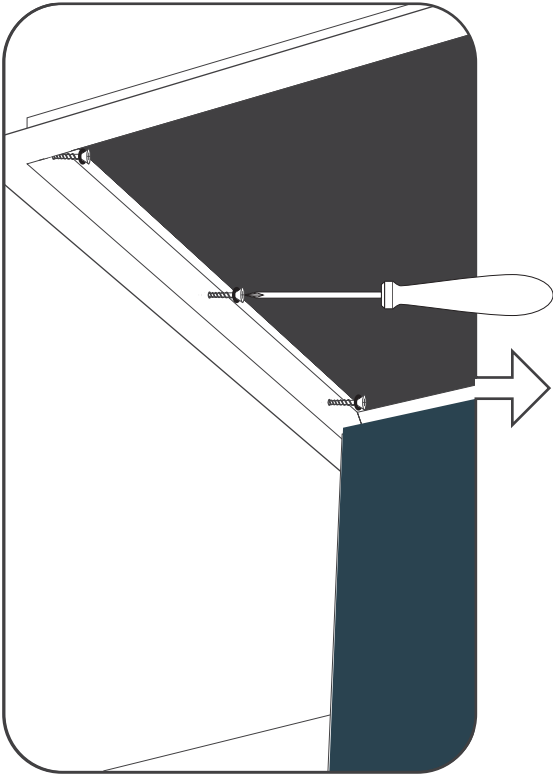
**5**

Before fully screwing into position, check the frame as square by ensuring the diagonals are equal

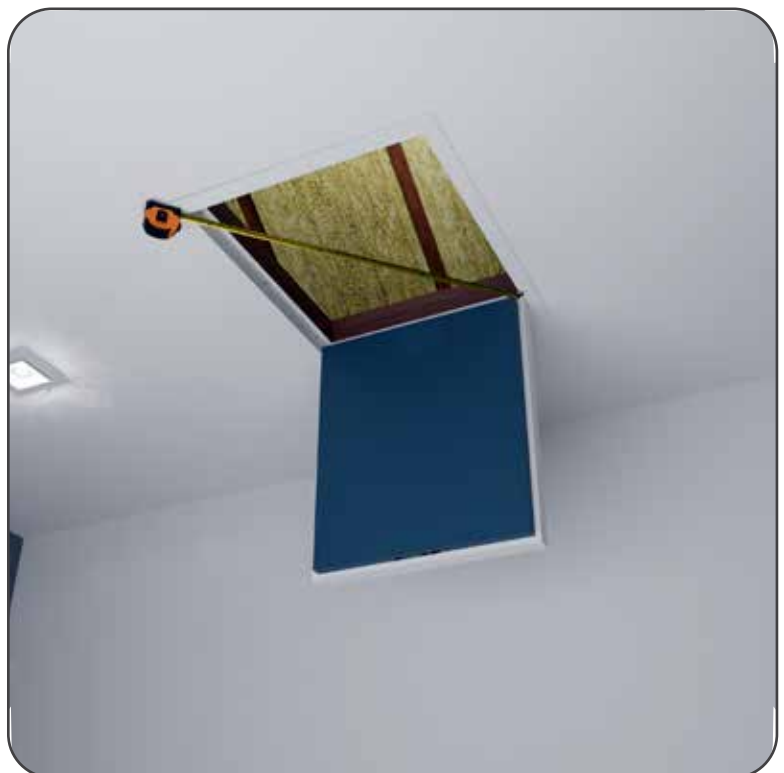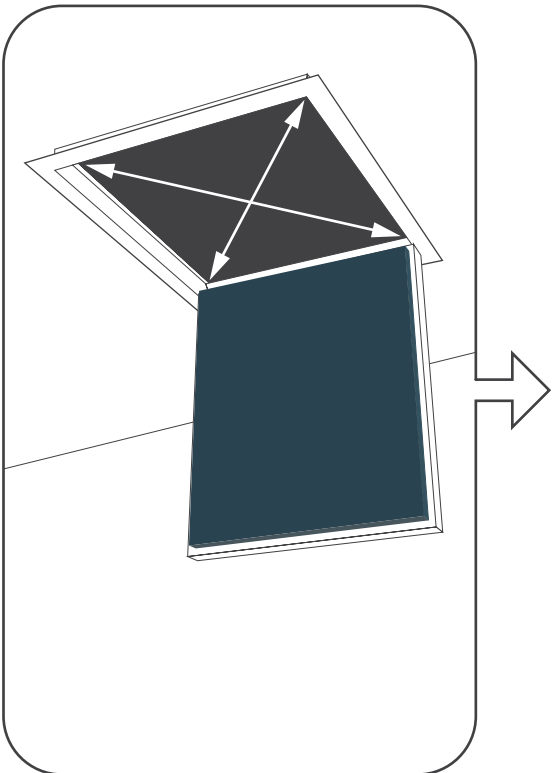

If necessary, add packers behind the frame fixings.

Do not overtighten the screws as this can distort the frame and break the air seal.

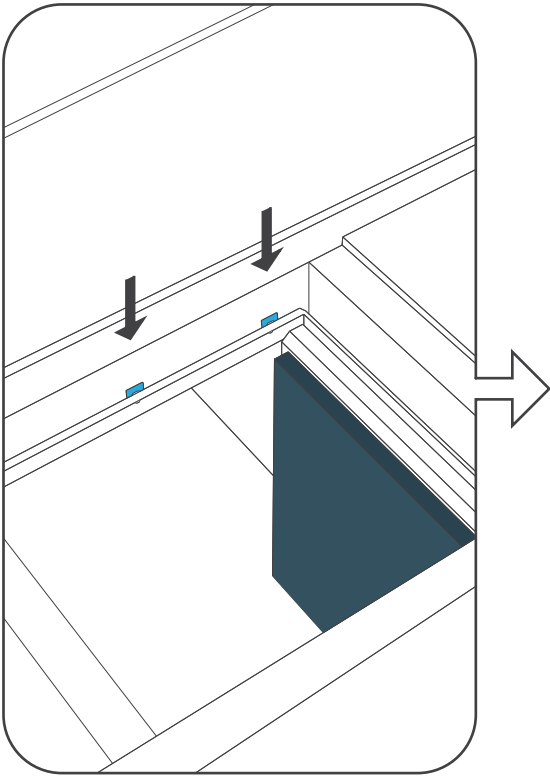

Close the hatch door and put the key into the lock.
Turn the key 90° to secure the door in the closed position.

