

SD Fire Rated Loft Hatch

51
ACCESS PANELS

SD Fire Rated - Part B & Part L Compliant (5 Sizes)



The SD Range of loft hatches are compatible with our AL2, AL3 & AL3C residential loft ladders.

- UKAS accredited 1 hour fire test
- Tested to BS EN 1364-2:1999
- Complies with Part L Building Regulations
- Air tested to a superb result of 0.76m³/hr @ 50Pa
- Budget or key locking options available
- Zintec steel loft hatch in white RAL No. 9016 with 20% gloss
- Unrivalled insulation properties @ 0.32 "U" value
- Pole available as separate item (not suitable for Key Lock)
- Bespoke sizes up to a maximum of 900×900mm
- All sizes meet or exceed NHBC size requirements



MADE IN THE UK



FIRE RATED



LOCK OPTIONS



AIR TESTED




BESPOKE OPTIONS



U VALUE

CODE	STRUCTURAL OPENING REQUIRED AFTER LINING THE OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
SD-536X736	538 × 738mm	520 × 630mm	68mm	8.5kg	0.32 W/m ² k
SD-550X550	555 × 555mm	530 × 480mm	68mm	6.4kg	0.32 W/m ² k
SD-550X800	555 × 805mm	535 × 730mm	68mm	9.4kg	0.32 W/m ² k
SD-600X600	605 × 605mm	580 × 530mm	68mm	7.1kg	0.32 W/m ² k
SD-600X900	605 × 905mm	580 × 828mm	68mm	9.7kg	0.32 W/m ² k
SDS-FR & SDS-FR-OS (Bespoke)	Width over 600mm - Manufactured with twin locks		68mm	Varies	0.32 W/m ² k

Note: All openings need to be lined with 9.5mm fire rated plasterboard

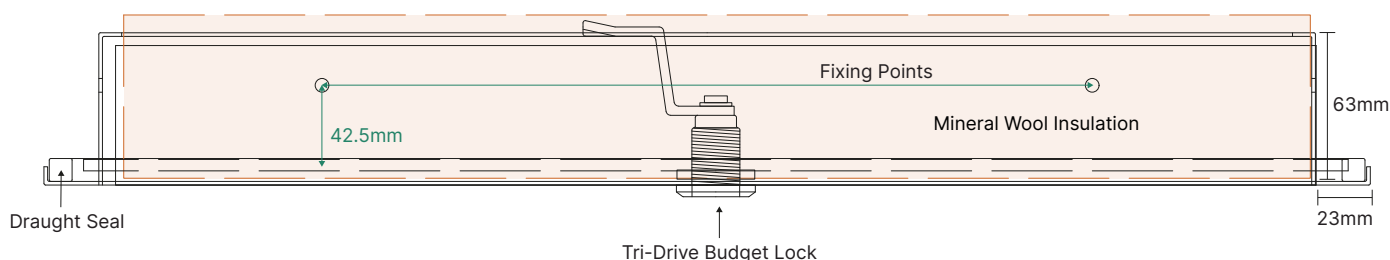

T: 01937 325 325 E: info@jupiterblue.co.uk

jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF