

SP Fire Rated Loft Hatch

SP Loft Hatch - Push-Up Fire Rated Loft Hatch




- Budget zintec steel push-up 1 hour fire rated hatch
 - Adhoc fire test as per BS 476 Part 22
 - Air test to BS EN 1026:2000 and BS EN 12207:2000
 - Push up (not hinged)
- 80mm insulation on SP1 & SP2, 50mm on SP3
 - Bespoke sizes available
 - Draught sealed
 - Powdercoated in white RAL 9016



CODE	STRUCTURAL OPENING REQUIRED AFTER LINING THE OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	FRAME SIZE	U VALUE
SP1	538 × 538mm	520 × 520mm	93mm	4.5kg	35mm	0.35 W/m2k
SP2	538 × 738mm	520 × 712mm	93mm	6.1kg	25mm	0.35 W/m2k
SP3 (Bespoke)	Width over 600mm - Manufactured with twin locks		68mm	Varies	25mm	0.35 W/m2k

Note: All openings need to be lined with 9.5mm fire rated plasterboard

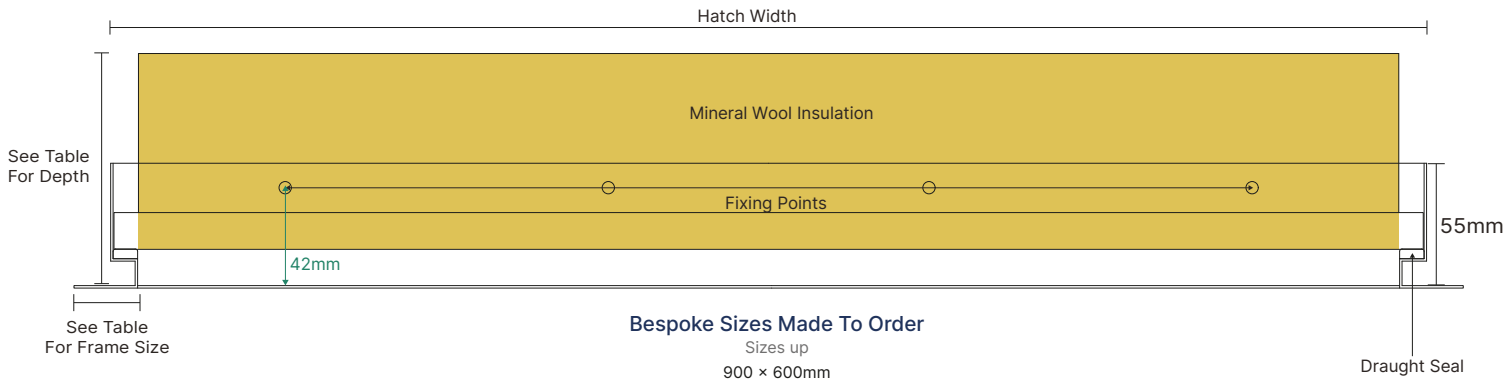

T: 01937 325 325 E: info@jupiterblue.co.uk

