
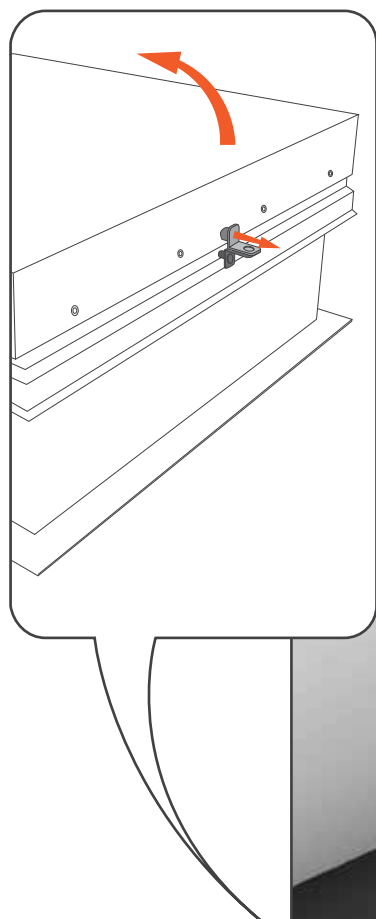


# Roof Hatch

## Fitting Instructions

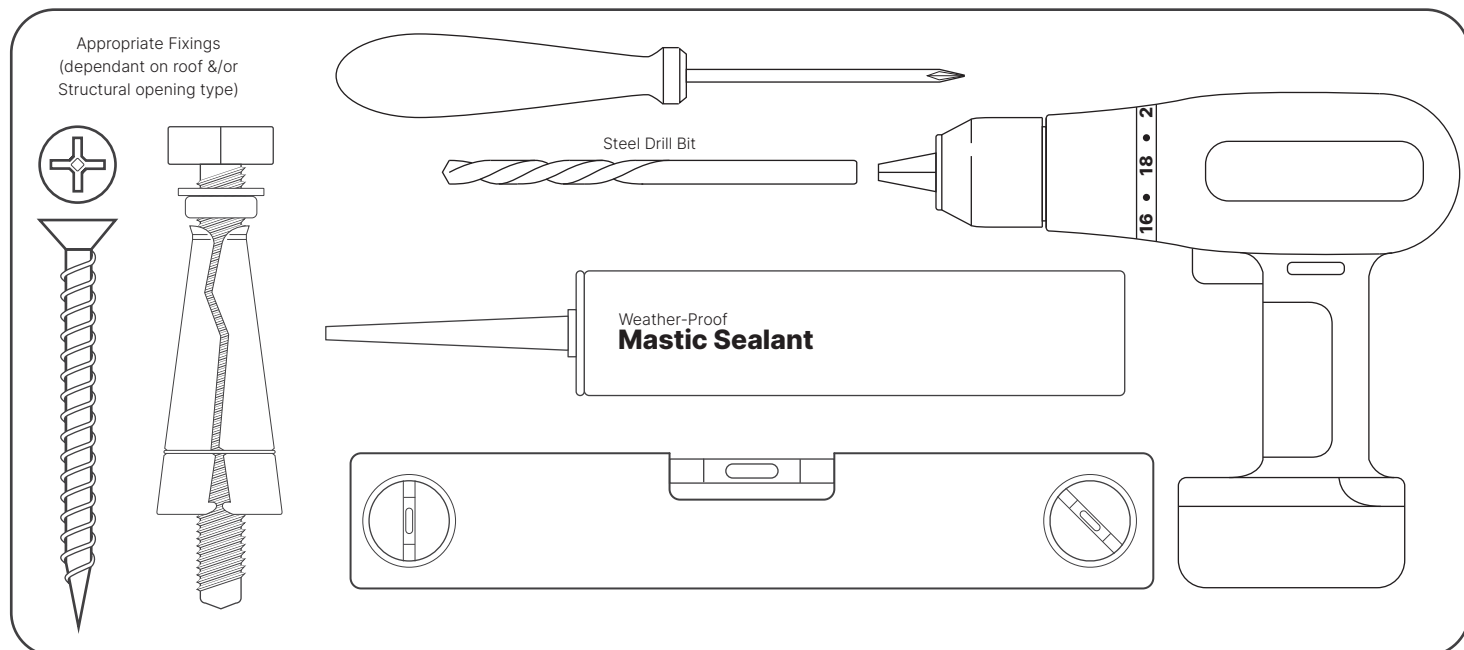


Ensure the hatch is stable & level when opening.

**1**


To open the lid, firmly pull the top catch, noting that it is operated by a gas strut and will open promptly and automatically .



Ensure that the clear opening match.


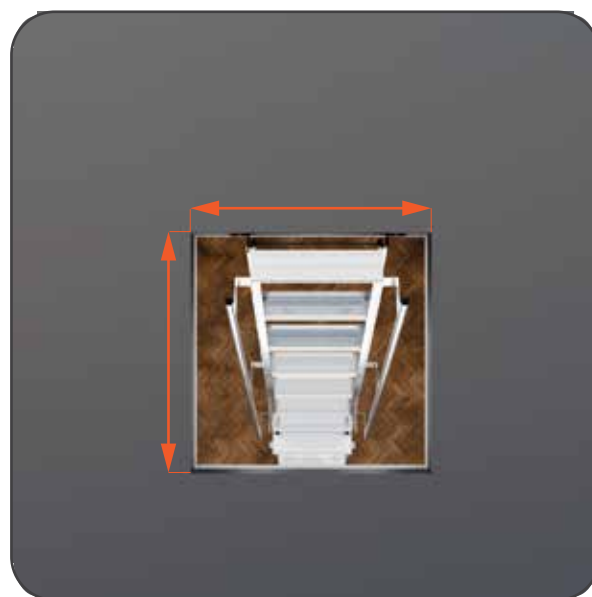


Drill several appropriately sized holes through the bottom fixing plate that correspond to your fasteners and the roof or supporting structure.

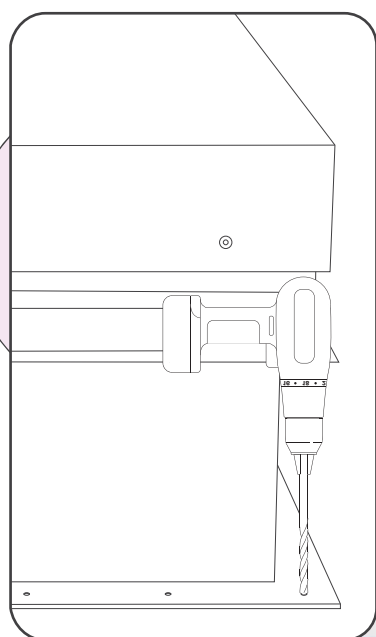


# 4

Secure the roof hatch to the roof or supporting structure using suitable fixings.

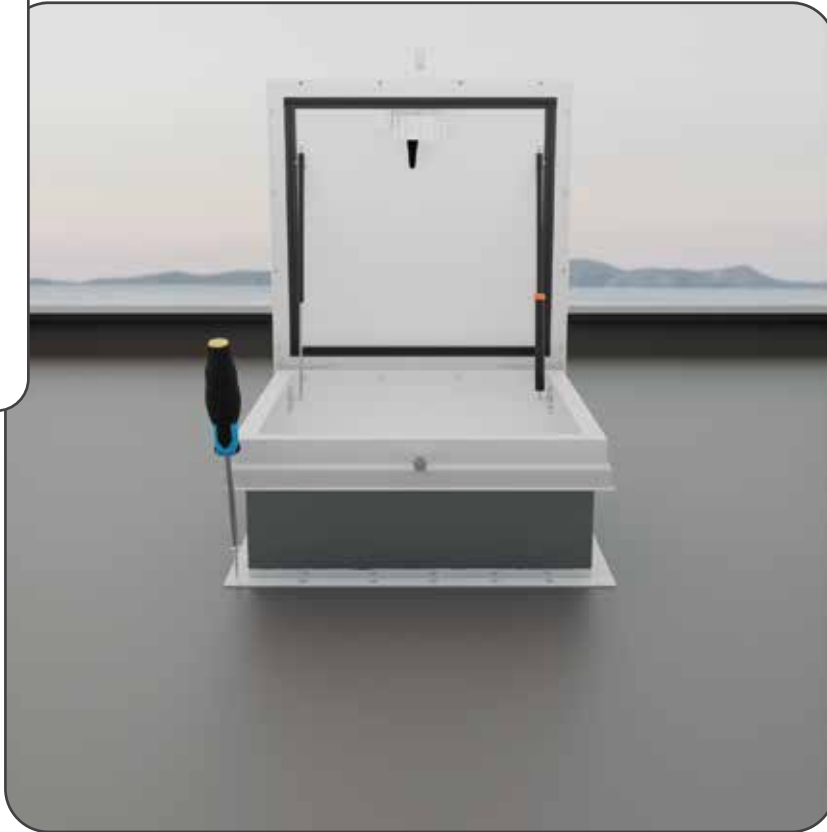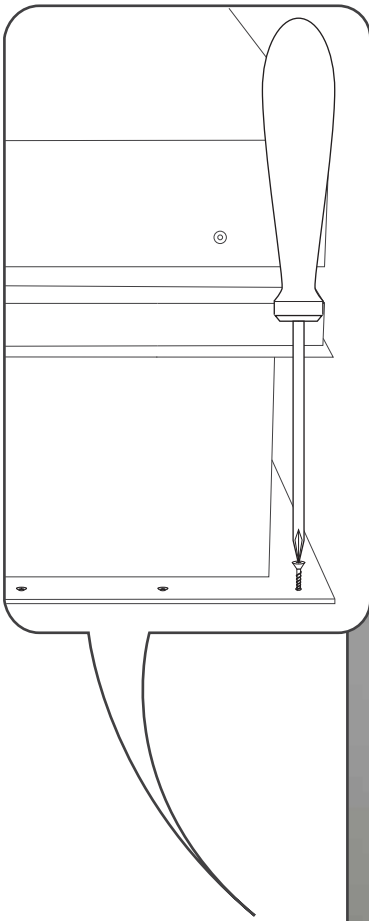


# 5

Apply weatherproof sealant to secure the fixing edge of the roof hatch to the roof.

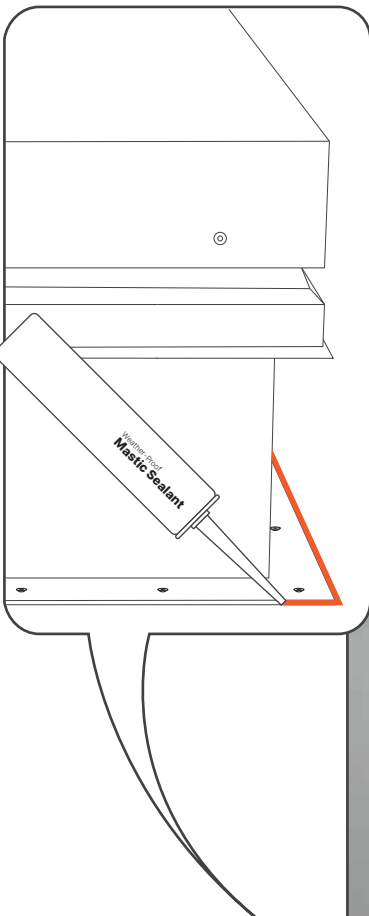


6

Apply the roofing membrane according to the manufacturer's instructions, ensuring the membrane extends under the rain fall-off strip around the center belly of the hatch.

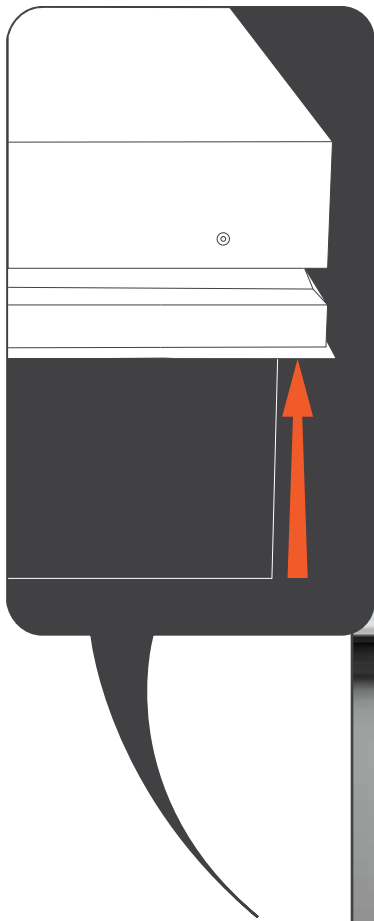

7

Apply silicone to seal the membrane to the hatch beneath the rainfall-off strip.

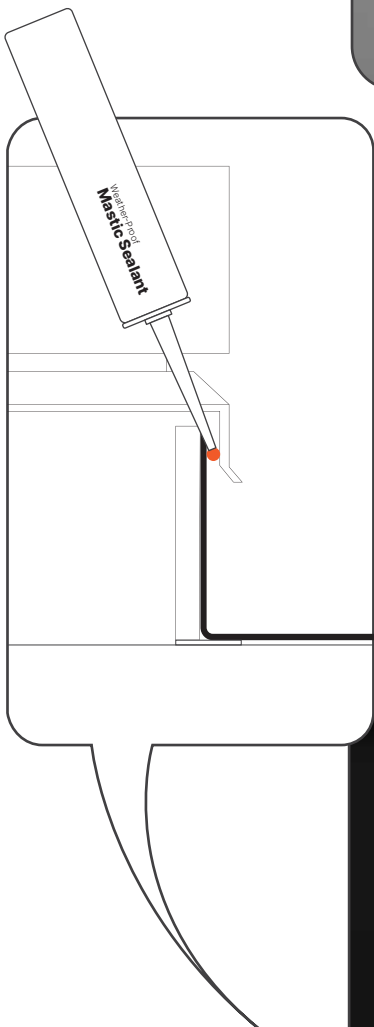

To close the lid, pull the gas strut's safety catch forward and lower the lid until the locking mechanism latches.

