

PFFD Fire Rated Access Panel

30

ACCESS PANELS

PFFD Picture frame or BFFD Beaded Frame



BFFD
BEADED FRAME



60 MIN
FIRE RATED



- Certified to a minimum 60 minute fire rating.
- 34dB sound reduction on UKAS test.
- Complies with Part B Building Regulations.
- For Walls or Ceilings
- Tested to BS EN 1634-1:2008 & BS EN 1364-2:1999 or BS476 Part22
- BS EN 1634-3 Smoke Test Approved (max 600×600mm on test specimen).
- Budget or Tamper Proof Locking Options.
- Powder-coated in white RAL9010 with satin finish.



MADE IN THE UK



1Hr Fire Rated



34dB

ACOUSTIC REDUCTION




SMOKE TESTED



LOCK OPTIONS

CODE	PANEL SIZE	STRUCTURAL OPENING	OVERALL SIZE INC. FRAME	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD/BFFD-150×150	150 × 150mm	155 × 155mm	200 × 200mm	75 × 80mm	50mm	1.7kg
PFFD/BFFD-200×200	200 × 200mm	205 × 205mm	250 × 250mm	120 × 140mm	50mm	2.4kg
PFFD/BFFD-230×150*	230 × 150mm	235 × 155mm	280 × 200mm	190 X 70mm	50mm	2.1kg
PFFD/BFFD-300×300	300 × 300mm	305 × 305mm	350 × 350mm	220 × 164mm	50mm	4.3kg
PFFD/BFFD-350×350	350 × 350mm	355 × 355mm	400 × 400mm	270 × 314mm	50mm	5.4kg
PFFD/BFFD-400×400	400 × 400mm	405 × 405mm	450 × 450mm	310 × 350mm	50mm	5.8kg
PFFD/BFFD-450×450	450 × 450mm	455 × 455mm	500 × 500mm	370 × 412mm	50mm	7.6kg
PFFD/BFFD-500×500	500 × 500mm	505 × 505mm	550 × 550mm	418 × 460mm	50mm	8.2kg
PFFD/BFFD-550×550	550 × 550mm	555 × 555mm	600 × 600mm	470 × 514mm	50mm	10.6kg
PFFD/BFFD-600×300*	600 × 300mm	605 × 305mm	650 × 350mm	565 × 235mm	50mm	6.7kg
PFFD/BFFD-600×600	600 × 600mm	605 × 605mm	650 × 650mm	520 × 564mm	50mm	12.0kg
PFFD/BFFD-900×600*	900 × 600mm	905 × 605mm	950 × 650mm	865 × 520mm	50mm	17.8kg
PFFD/BFFD-1200×600*	1200 × 600mm	1205 × 605mm	1250 × 650mm	1140 × 565mm	50mm	21.5kg

*Hinged long side

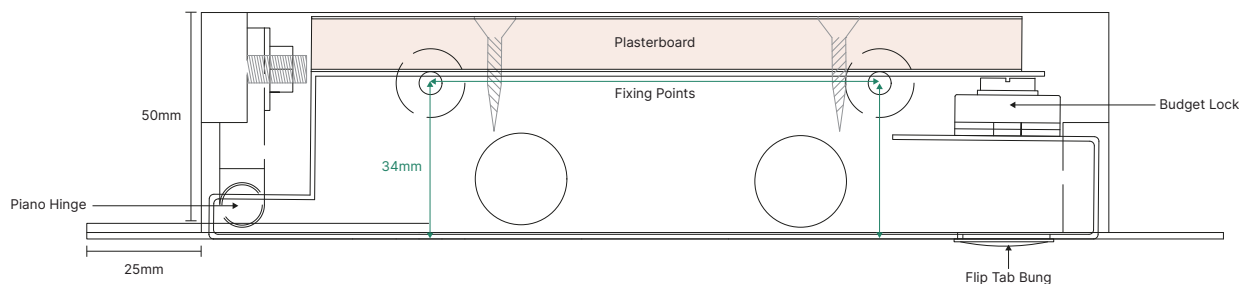

T: 01937 325 325 E: info@jupiterblue.co.uk

THIS IS
jupiter blue

Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF