SD Fire Rated Loft Hatch

SD Fire Rated - Part B & Part L Compliant (5 Sizes)

60 MIN
FIRE RATED

The SD Range of loft hatches are compatible with our AL2,AL3 & AL3C residential loft ladders.

- UKAS accredited 1 hour fire test
- Tested to BS EN 1364-2:1999
- Complies with Part L Building Regulations
- Air tested to a superb result of 0.76m3/hr @ 50Pa
- Budget or key locking options available
- Zintec steel loft hatch in white RAL No. 9016 with 20% gloss
- Unrivalled insulation properties @ 0.32 "U" value
- Pole available as separate item (not suitable for Key Lock)
- Bespoke sizes up to a maximum of 900×900mm
- All sizes meet or exceed NHBC size requirements

CODE	STRUCTURAL OPENING REQUIRED AFTER LINING THE OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT	U VALUE
SD-536X736	555 × 755mm	520 × 630mm	68mm	8.5kg	0.32 W/m2k
SD-550X550	555 × 555mm	530 × 480mm	68mm	6.4kg	0.32 W/m2k
SD-550X800	555 × 805mm	535 × 730mm	68mm	9.4kg	0.32 W/m2k
SD-600X600	605 × 605mm	580 × 530mm	68mm	7.1kg	0.32 W/m2k
SD-600X900	605 × 905mm	580 × 828mm	68mm	9.7kg	0.32 W/m2k
SDS-FR & SDS-FR-OS (Bespoke)	Width over 600mm - Manufactured with twin locks		68mm	Varies	0.32 W/m2k

Timber joist openings must be lined with plasterboard before fitting:
minimum 9.5mm for the 536x736, and minimum 12.5mm for all other sizes.

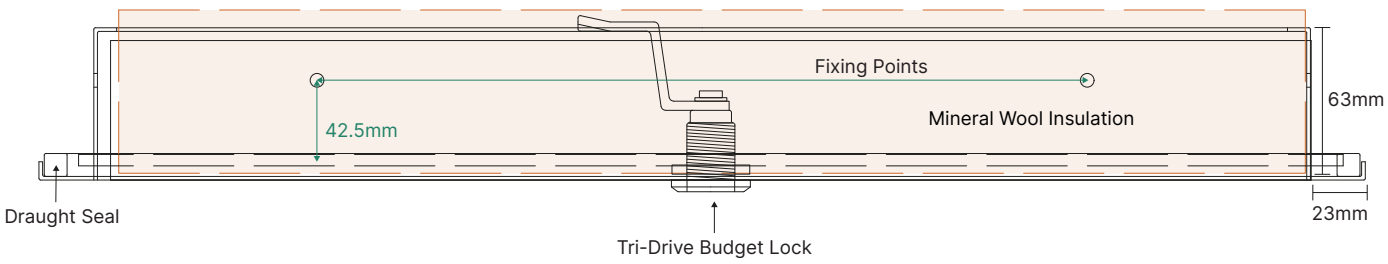

T: 01937 325 325 E: info@jupiterblue.co.uk
Jupiter Blue Ltd Registered office Unit 86 Marston Moor Business Park, Tockwith, YO26 7QF